

### Standards:

Common Lengths: 28-53 feet Width: 96 - 102 inches Height: 12.5 - 13.5 feet Door Type: Swing Door/Roller door (equip varies by carrier)

### Capacity: Max Weight @ 53 ft length: 45,000 lbs Max Pallets @ 53 ft: 26 pallets

Usage: Used to carry most common freight (boxed, crated, palletized, etc.)

## **Common Standard Freight Trailer Specifications**

Overall				Interior			Rear Door		Max Weight
Length	Width	Height	Length	Width	Height	Width	Height		
40 ft	96"	12' 6"	39' 6"	92.5″	94.5″	92″	92″	<b>2,398</b> cu ft	11,300 lbs
43 ft	96"	13' 0"	41' 6"	92.5"	100.5″	92″	98″	<b>2,711</b> cu ft	11,900 lbs
48 ft	102"	13' 6"	47' 6"	98.5″	100.6"	98″	100.6"	<b>3,465</b> cu ft	13,500 lbs
53 ft	102"	13' 6"	47' 6"	98.5″	108″	94"	102"	<b>3,489</b> cu ft	13,500 lbs

Data provided for illustrative purposes only. Actual equipment in use varies by carrier and manufacturer.

This is only a guide and should not be used as a definitive reference for dock planning.



#### Standards:

Common Lengths: 22-26 feet Width: 96 - 102 inches Height: 12.5 - 13.5 feet Door Type: Swing Door/Roller Door (varies by carrier)

### Capacity: Max Weight @ 26 ft length: 14,000 lbs Max Pallets @ 26 ft: 12 pallets

#### Usage:

Available Options: Lift Gate Refrigeration




### Standards: Common Lengths: 28 feet Width: 96 - 102 inches Height: 12.5 - 13.5 feet Door Type: Swing Door/Roller Door (varies by carrier)

### Capacity: Max Weight @ 28 ft length: 22,000 lbs Max Pallets @ 28 ft: 14 pallets

#### Usage:


**Available Options:** Lift Gate Single, Tandem & Triple

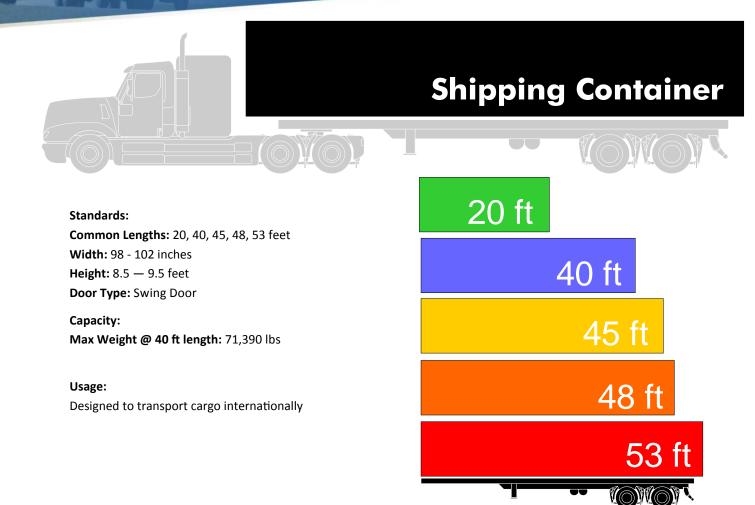

## **Common Shipping Container Specifications**

	20'	40'	45'	48'	53'
Length	19' 10"	40'	45'	48'	53'
Inside Length	19' 4"	39' 6"	44.6′	47.6′	52.3"
Height	8' 6"	8' 6"	9' 6"	9' 6"	9' 6"
Inside Height	7' 9"	7′ 10″	8′ 10″	8′ 10″	8′ 10″
Door (H x W)	7'6" X 7' 8"	7'6" X 7' 8"	8′ 6″ X 7′ 8″	8′ 6″ X 7′ 8″	8' 6" X 7' 8"
Width	8'	8'	8'	8' 6″	8' 6"
Inside Width	7' 8"	7' 8'	7′ 8″	8′ 2″	8′ 2″
Capacity	1,170 ft <sup>3</sup>	2,390 ft <sup>3</sup>	2,700 ft <sup>3</sup>	3,000 ft <sup>3</sup>	3,800 ft <sup>3</sup>

Data provided for illustrative purposes only. Actual equipment in use varies by carrier and manufacturer. This is only a guide and should not be used as a definitive reference for dock planning.

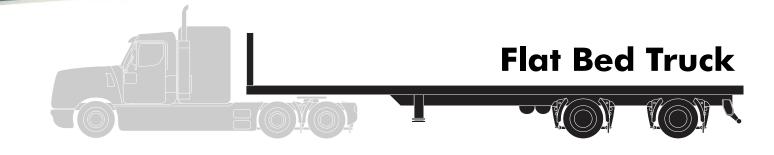

Standards: Common Lengths: 20, 40, 45, 48 feet Width: 98 - 102 inches

#### Usage:

Designed to transport oversized cargo that won't normally fit into a standard sized trailer

Capacity: Max Weight @ 40 ft length: 71,390 lbs

## **Common Flat Bed (Platform) Specifications**

Ove	rall	Max Weight		
Length	Width			
26 ft	96″	55,000 lbs		
40 ft	96″	55,000 lbs		
45 ft	102″	55,000 lbs		
48 ft	102"	<b>55,000</b> lbs		

Data provided for illustrative purposes only. Actual equipment in use varies by carrier and manufacturer. This is only a guide and should not be used as a definitive reference for dock planning.