

G. Sammel

TF 5

PARTS


STD = N | PO = EPDM | VITON | SUCTION SEAL = VITON EXREME

MixRite TF5 , 0.1-1% , On Off,	32 mm 28050110000	1" BSPT 28040110000	1" NPT 28030110000
MixRite TF5 , 0.2-2% , On Off,	28050210000	28040210000	28030210000
MixRite TF5 , 0.5-5% , On Off,	28050510000	28040510000	28030510000

No.	COMPONENT NAME	COMPONENT CODE	No.	COMPONENT NAME	COMPONENT CODE
1	TF 5 COVER	35201011301	42	NUT 3/4"HOLE 20	36030120033
2	BODY 1" BSP	35202041302	43	WASHER FOR SWIVEL 3/4"	37245581200
2	BODY 1" NPT	35202031302	44	RECORD BODY 19X3/4" - 5% model	32454759122
2	BODY 1 1/4" NPT	35202061302	44	RECORD BODY 12x3/4" - 1%,2% MODEL	32454752122
2	BODY 32	35202051302	45	PLASTIC SPRING TF 5	35126018249
3	PISTON TF5	35203013103	46	SPRING FOR INNER VALVE TF 10/5	38000001151
5	CYLINDER SUPPORT TF5	35204011305	47	SEAL 32 mm (MODEL COMPR. 32 MM)	38002003247
6	CYLINDER SUPPORT NUT TF5	35205011806	48	WHITE LOCK RING 32 MM	38003003248
7	ADJUSTMENT NUT TF5	35207011807	49	NUT 32 mm BLACK	38004603249
8	LATCH NUT TF5	35208011808	50	FLAT SEAL PO	38000023248
9	CYLINDER 1% MIXRITE TF 5	35209016109	51	SEAL HOLDER 32 MM	35217013151
9	CYLINDER 2% MIXRITE TF 5	35210016109	52	EJOTE SCREW WN-1412	38000001152
9	CYLINDER 5% MIXRITE TF 5	35211016109	53		
10	CYLINDER SUPPORT SPACER TF5	35217013110	54		
11	INSIDE BASE TF5	35212010111	55	SUCTION TUBE 19mm - 5% MODEL	36030001955
12	LARGE EXIT VALVE 3 TF5	35219013112	55	SUCTION TUBE 16 mm - 1%,2% model	36030001655
13	CENTRAL VALVE 3 TF5	35227011113			
14	TOGGLE FRAME TF5	35227011214			
15	TOGGLE TF5	35216013115			
16	TOGGLE PIN TF5	35213013116	62	O RING 2-113	38060211362
17	BRIDGE PIN TF5	35213013117	63		
18	BRIDGE TF5	35206011118	64		
19			65		
20	O RING 2-110	38060211045	66	INNER VALVE TF5	35220013166
21	TOGGLE BEARING	35121011121	67	BALL	38000000067
22	PISTON BAR 1% TF5	35222011222	68	1/2" BSPT NUT	35226013324
22	PISTON BAR 2% TF5	35222021222	69	1/2" SEAL PLATE	35217013123
22	PISTON BAR 5% TF5	35225051222	71	EASEL LEG TF 10	38000004171
23			72	TF10 BRACKET	35125011872
24			73	GUIDE RING CYLINDER SUPPORT TF5	35228011168
25	SUCTION SEAL 1% MIXRITE TF 5	35202014225	75	HOSE COVER 19 MM - 5% MODEL	36030111935
25	SUCTION SEAL 2% MIXRITE TF 5	35202024225	75	HOSE COVER 12 MM - 1%,2% MODEL	36030111235
25	SUCTION SEAL 5% MIXRITE TF 5	35202054225	76	SUCTION FILTER 30	36030013036
26	OPERATION ROD	35214013126	77	EASEL LEG PLUG D. 22	38001003277
27	"O" Ring 12X2	37005852002	78	FILTER CERAMIC WEIGHT-5% MODEL	38000000038
28	"O" RING 2-011 VITON	38020111228	78	FILTER WEIGHT - 1%,2% MODEL	38060801038
29	UPPER PISTON SEAL	35223012229	81	V7 INNER VALVE LOCKER	35028001181
30	LOWER PISTON DUAL SEAL	35290012230	82	ON/OFF HANDLE FOR TF	35305011285
31	O RING 2-356	38023562231	83	COVER FOR ONOFF TF	35303011258
32	O RING 7*50 PO	38050073232	84	PIN	35308011286
33	O RING 2-321 PO FOR 1% MODEL	38023213233	85	O RING 9*3	38000932246
33	O RING 28*7 PO FOR 2% MODEL	38028073233	86	BAR FOR TF5 HANDLE ON/OFF	35308011288
33	O RING 2-219 PO FOR 5% MODEL	38022193233	87	O RING 2-116	38021169292
34	CHECK VALVE GUIDE TF5/10	35204003202	88	O RING 20*3	38002032264
35	CHECK VALVE SEAT TF5/10	35204003201	89	ADAPTOR 3/4" ONOFF TF	35301011287
36	CHECK VALVE PIN TF5/10	36061003236	90	EJOTE SCREW WN-1412 4*25	38000042565
37	CHECK VALVE SPRING HSTY TF5/10	38028113529	91	ON/OFF DISC FOR TF5	35302051290
38	O RING 2-206 PO	38022060284	92	STAINLESS STEEL DISC	38060351641
39			95	SPACER FOR CYLINDER 2%	35200023195
40	O RING 30*3 PO	38003033246			
41	CHECK VALVE NUT	36030622100	105	SST CLIP SCREW - 5% MODEL	38013322102

TF 5

Hand - OnOff

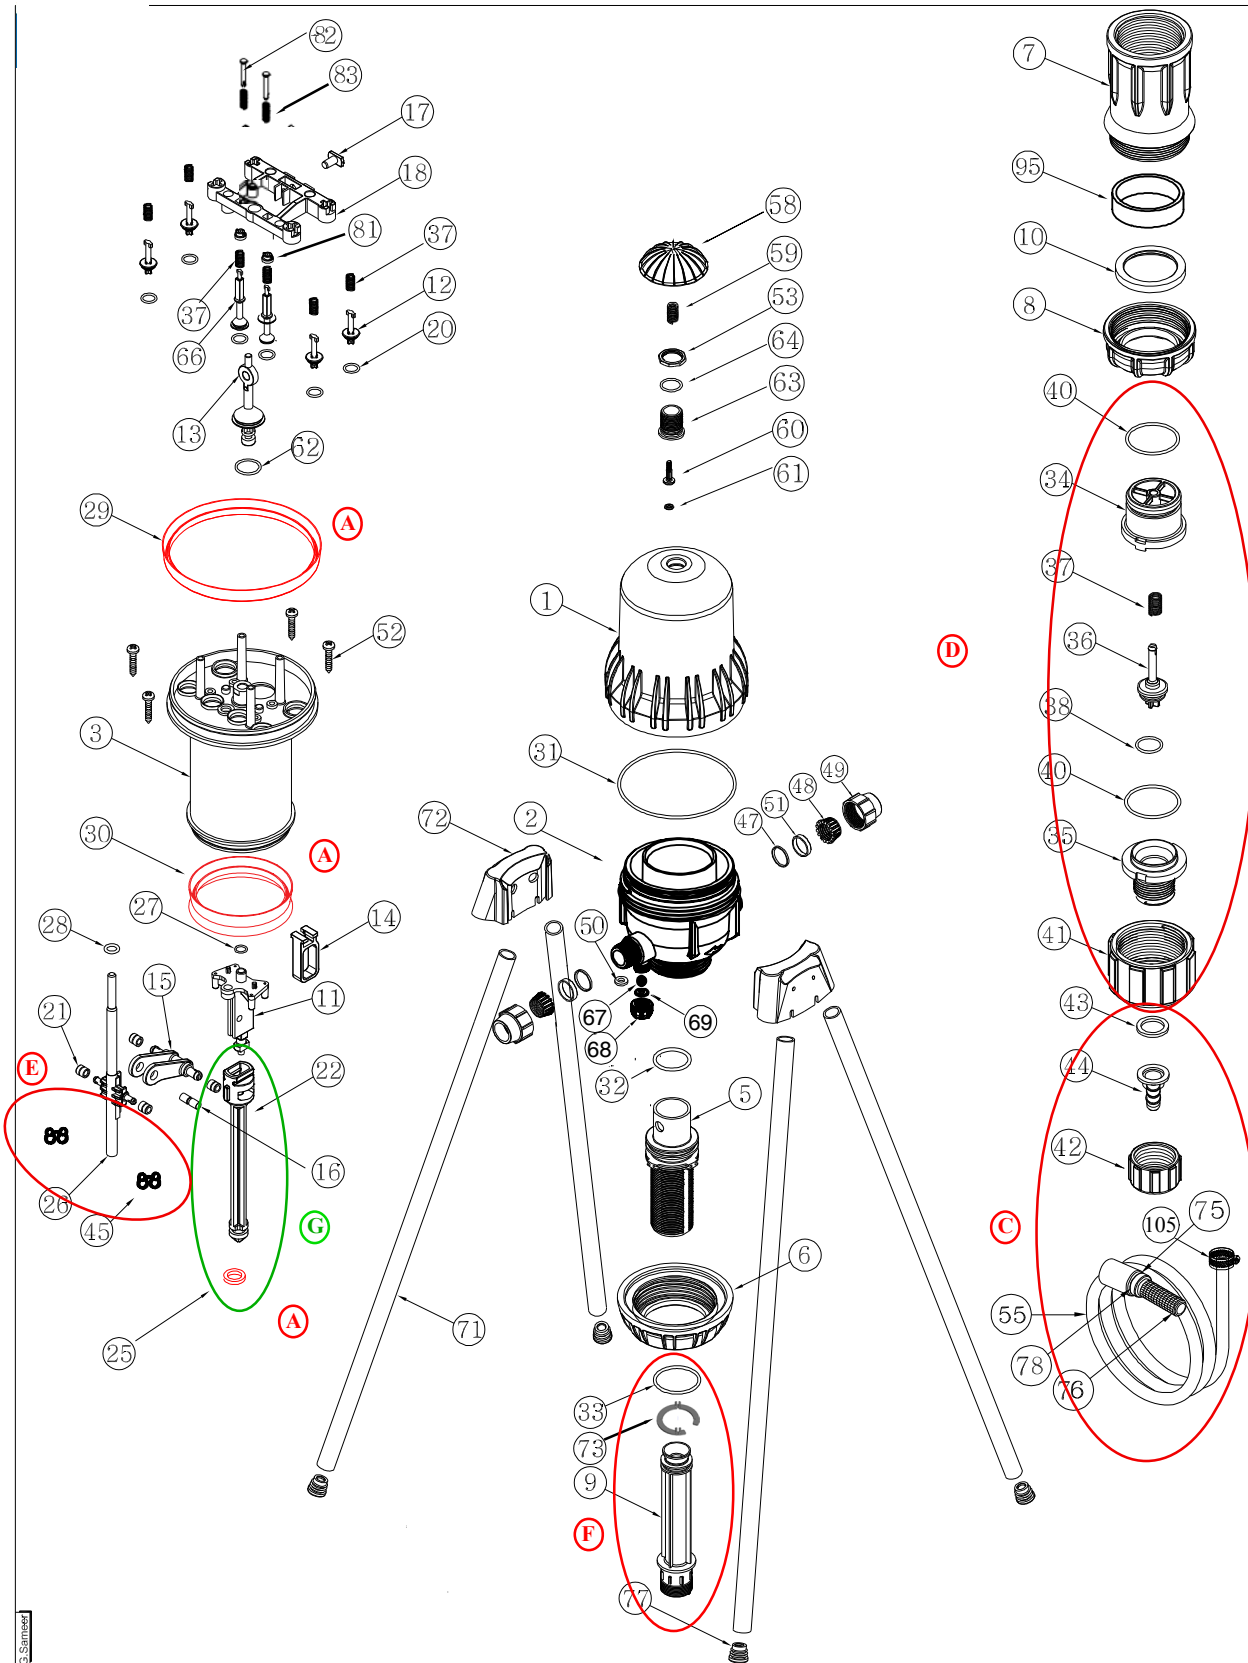

NO.	PART	CAT.NO
A	SEAL KIT 1%	35200000001
	SEAL KIT 2%	35200000002
	SEAL KIT 5%	35200000005
D	SUCTION CHECK VALVE KIT	35200000058
E	MECHANISM SPRING	35100000045
F	SUCTION CYLINDER KIT 1%	35200000009
	SUCTION CYLINDER KIT 2%	35200000011
	SUCTION CYLINDER KIT 5%	35200000012
G	SUCTION PISTON KIT 1%	35200000019
	SUCTION PISTON KIT 2%	35200000020
	SUCTION PISTON KIT 5%	35200000021
C	SUCTION TUBE KIT 1%&2%	36000000021
	SUCTION TUBE KIT 5%	36000000028
	WATER ENGINE COMPLETE	35200000006
H	MANUAL ON/OFF KIT	35200000048