


Low Rise Lifting Platform

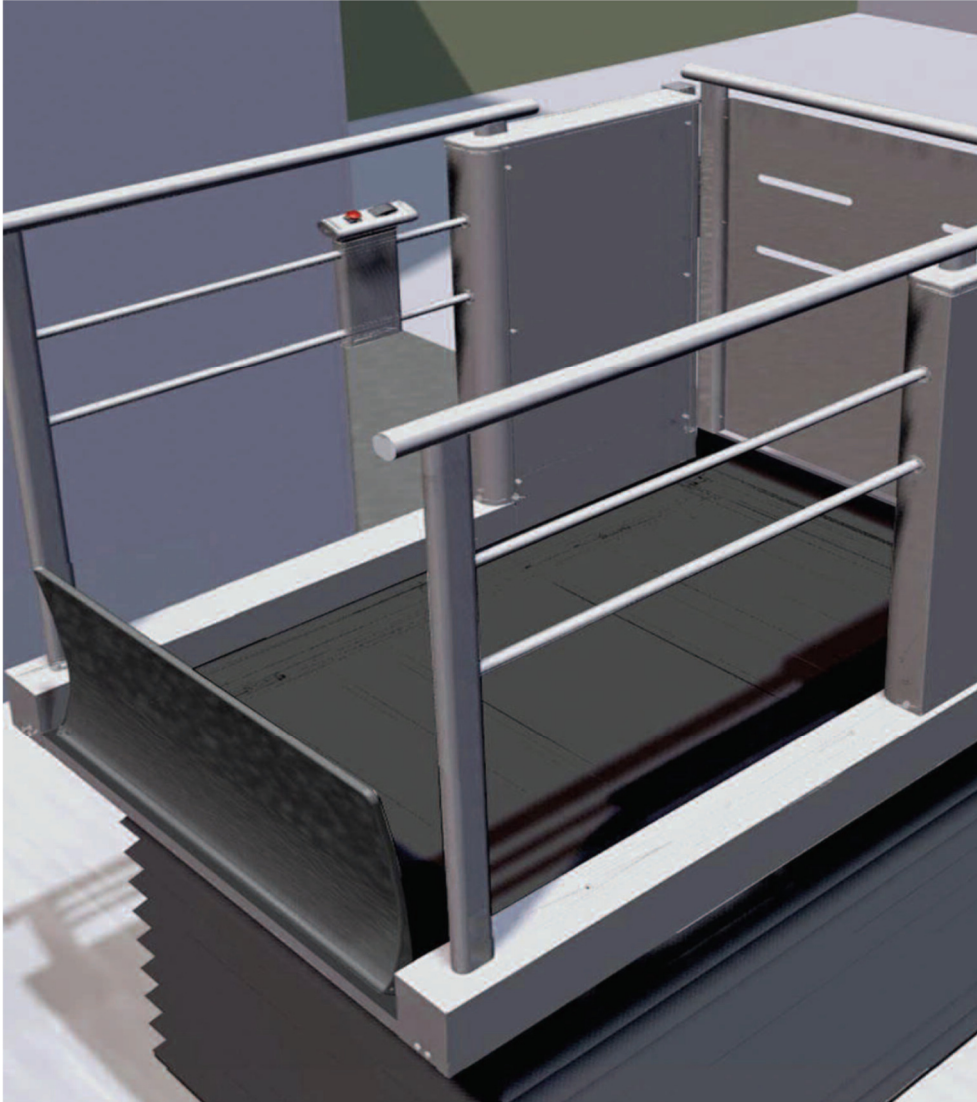

- **Platform sizes conform to BS 6440**
- **Suitable for Domestic and Public Access**
- **Variety of finish and colour options**
- **Internal or External use**
- **Single phase 230V**
- **Simple Installation**
- **Anti-corrosion warranty**
- **Free Standing**



Niche..... Our passion and purpose is the supply of specialist lifts that enable wheelchair users and the less able gain access to upper floors and up stairways, plus service, trolley and goods lifts for transporting goods in the range 5kgs to 2000kgs

We supply, install and service Niche products that meet your specific needs.

NICHE LIFTS—Focus and expertise working uniquely for YOU on Niche Products.

Low Rise Lifting Platform


Model Type	Low rise lifting platform
Rated Load	300kg capacity
Rated Speed	20 mm/sec
Drive Type	Electro-hydraulic
Platform dimensions	1450mm x 800mm or 1450mm x 900mm
Footprint size	1890mm x 1004mm or 1890mm x 1104mm
Required width	1304mm or 1404mm width required to comply with BS6440
Power Supply	230v, 1 phase, 50hz
Travel	Up to 1000mm free standing or 935mm pit mounted
Pit	Either free standing or a 60mm pit
Controls	Post mounted call stations at the upper and lower levels. Rocker switch with emergency stop on the platform. Hold to run operation.
Safety features	Platform and ramp safety sensitive devices as standard. Manual emergency lowering.
Platform	Available in 800mm or 900mm width. 1100mm high side rails with open panels. Automatic powered folding ramp. Finish blue 700 Sable as standard
Options	Manual self closing gate with interlock at upper level. Steel or glass infill panel to gate. Toughened glass infill panels to platform sides. Two way key switching to upper/lower controls. Wall mounted controls.
Compliance	BS6440:1999 The Supply of Machinery (Safety) Regulations 2008
Documentation	Owners guide issued on completion.

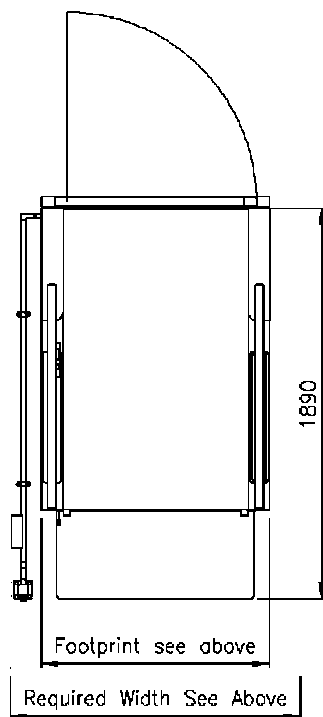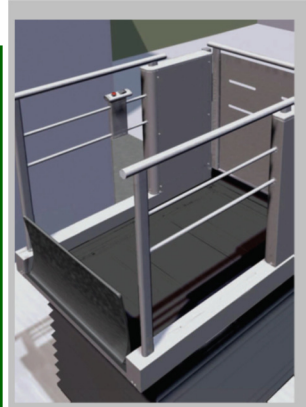

Notes:

1500mm of clear space is recommended at the entrance and exit points of the lift for access.

A minimum of 2000mm is required above the threshold height.

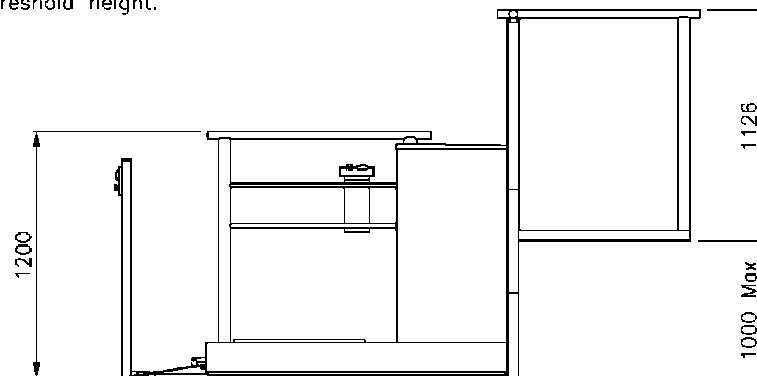

Niche LiftsTM

Niche Lifts Ltd
Office 15-16
12 Farwig Lane
Bromley, Kent
BR 1 3RB

Tel 020 8295 2852
Fax 020 8466 1695

www.nichelifts.com



Configure your lift on-line at www.nichelifts.com

The information contained in this brochure was correct at the time of printing, due to continued development of our products we reserve the right to change the specification without prior notice