Breakout's

1.27x1.27mm IDC

1.27x1.27mm MALE IDC

1.27x1.27mm MAX IDC

1.27x1.27mm Male MAX IDC

1.27x2.54mm IDC

1.27x2.54mm PLUS IDC

2.00x2.00mm IDC

2.00x2.00mm MALE IDC

2.54x2.54mm IDC

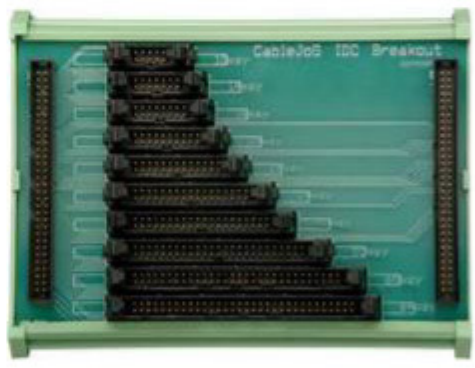

2.54x2.54mm MALE IDC

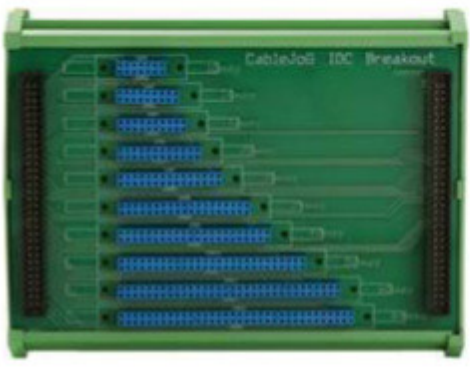

2.54x2.54mm Transition Header

'd' type Male

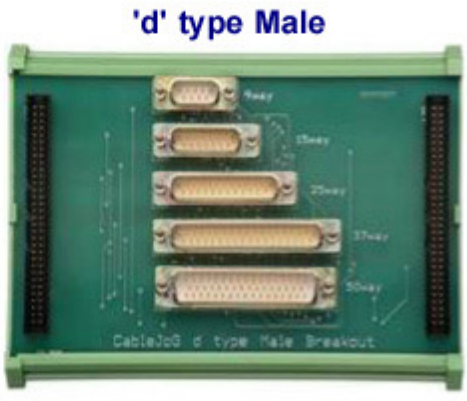

General Specification:

- 64way & 34way connectors for connecting to the CableJoG unit and further breakout boxes.
- DIN rail mounting boxes.
- Suitable for CableJoG 128, 256,512 & 1024. Limited use with RibbonJoG.

'd' type Female

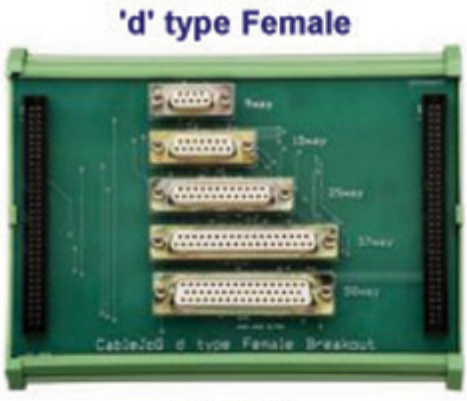

HD 'd' type Male

HD 'd' type Female

EDAC 38

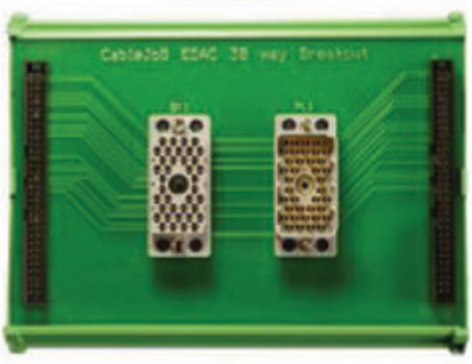

EDAC 56

Single In Line

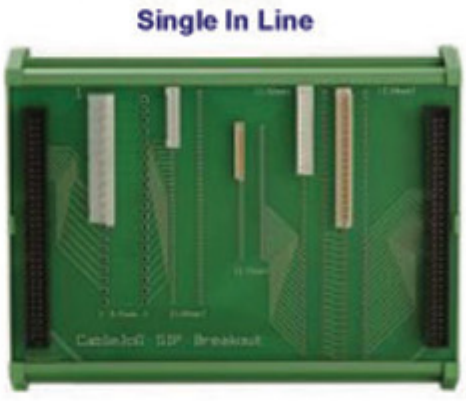

Connector Size	Type	Number of pins	Use with
1.27mm x 1.27mm	IDC male or female	10,20,26,34,40 & 50	CableJoG 128,256,512,1024 & RibbonJoG
1.27mm x 1.27mm	IDC male or female	6,810,12,14,16,20,24,26,30,34, 40,44,50,60 & 68	CableJoG 128,256,512,1024 & RibbonJoG - limited use
1.27mm x 2.54mm	IDC female	10,20,26,30,34,40,50 & 60	CableJoG 128,256,512,1024 & RibbonJoG
1.27mm x 2.54mm	IDC female	68,70,80,90 & 100	CableJoG 256,512 & 1024
2.00mm x 2.00mm	IDC male or female	6,8,10,12,14,16,20,24,26,30,34, 40,44,50 & 68	CableJoG 256,512 & 1024 CableJoG 128 - limited use RibbonJoG - limited use
2.54mm x 2.54mm	IDC male or female	10,14,16,20,26,34,40,50,60 & 64	CableJoG 128,256,512,1024 & RibbonJoG
2.54mm x 2.54mm	IDC transition	10,14,16,20,26,34,40,50,60 & 64	CableJoG 128,256,512,1024 & RibbonJoG
'd' type	male or female	9,15,25,37,50 & shield	CableJoG 128,256,512,1024 & RibbonJoG
HD 'd' type	male or female	15,26,44,62 & shield	CableJoG 128,256,512,1024 & RibbonJoG
38 way EDAC	male & female	38	CableJoG 128,256,512,1024 & RibbonJoG
56 way EDAC	male & female	56	CableJoG 128,256,512,1024 & RibbonJoG
1.25mm,2.00mm,2.50mm,2.54mm & 3.96mm	SIP	up to 40 (20 for the 3.96mm) Connectors not supplied.	CableJoG 128,256,512,1024 & RibbonJoG

CableJoG Ltd. 18 Browmere Drive, Croft, Warrington. WA3 7HT.
Tel: +44 (0) 1925 764 471 Email: sales@cablejog.com Web: www.cablejog.com