



STRADBALLY LADDERS

**IRELAND'S ONLY MANUFACTURER
OF WOOD,
ALUMINIUM &
FIBERGLASS LADDERS**

Carlow Road, Stradbally, Co. Laois

Tel: +353 57 86 25140 Fax: +353 57 86 25470

Email: sales@stradballyladders.com

Web: www.stradballyladders.com

GPS Code: 53.01101458, -7.13897553

Aluminium Double Ext. Ladders

Push-up BS.EN131 Standard Carry Capacity 150kg



Ref No:	Closed Ht:	Extended Ht:	Rungs:	Weight:
AE 11	7' 0" - 2.13m	11' - 3.35m	2 x 7	6.75kg
AE 14	8' 1" - 2.48m	14' - 4.27m	2 x 8	8.00kg
AE 17	9' 8" - 2.95m	17' - 5.18m	2 x 10	10.00kg
AE 20	11' 6" - 3.51m	20' - 6.10m	2 x 12	10.25kg
AE 22	12' 3" - 3.74m	22' - 6.71m	2 x 13	13.00kg
AE 24	13' 4" - 4.06m	24' - 7.32m	2 x 14	16.50kg
AE 26	14' 3" - 4.34m	26' - 7.92m	2 x 15	18.00kg
AE 28	15' 0" - 4.57m	28' - 8.53m	2 x 16	22.00kg
AE 30	16' 4" - 4.98m	30' - 9.14m	2 x 17	24.00kg

Aluminium Triple Ext. Ladders

Push-up BS.EN131 Standard Carry Capacity 150kg



Ref No:	Closed Ht:	Extended Ht:	Rungs:	Weight:
AS 15	7' 0" - 2.13m	15' - 4.57m	3 x 7	10.50kg
AS 20	8' 1" - 2.48m	20' - 6.10m	3 x 8	13.00kg
AS 25	9' 9" - 2.99m	25' - 7.62m	3 x 10	20.00kg
AS 30	12' 3" - 3.74m	30' - 9.14m	3 x 13	23.75kg
AS 35	16' 4" - 4.98m	35' - 10.67m	3 x 17	34.00kg

Aluminium Single Ladders

BS.EN131 Standard Carry Capacity 150kg



Ref No:	Closed Ht:	Rungs:	Weight:
S 12	12' 0" - 3.05m	12	8.00kg
S 13	13' 4" - 4.06m	14	8.25kg
S 14	14' 3" - 4.34m	15	9.00kg
S 15	15' 0" - 4.57m	16	11.00kg
S 16	16' 4" - 4.97m	17	12.00kg

Adjustable and Corner Ladder Standoff



- All box shaped stile with 'D' shaped rung
- Other sizes can be manufactured on request
- Crawler wheels and suction cups can be fitted as extra

Double Sided Standing Rung Ladders

(Painter's Trestles) - BS - EN131 Standard

Manufactured from Hemlock

Ref No:	Closed Height:	Rungs:	Weight:
PT04	6' 0" - 1.83m	2 x 6	13.75kg
PT08	8' 0" - 2.44m	2 x 8	17.75kg
PT10	10' 0" - 3.05m	2 x 10	22.75kg
PT12	12' 0" - 3.66m	2 x 12	28.75kg
PT14	14' 0" - 4.26m	2 x 14	35.75kg



Aluminium Roof Ladders


Aluminium box section complete with Ridge Hook and Crawler Wheels

Folding Type (for ease of use in storage and transportation)

Ref No:	Closed Ht:	Extended Ht:	Rungs:	Weight:
AR 17	9' 8"	17' - 5.28m	2 x 9	13.00kg
AR 20	10' 6"	20' - 6.10m	2 x 10	14.00kg
AR 24	13' 6"	25' - 7.62m	2 x 13	19.00kg

Straight Type

Ref No:	Extended Ht:	Rungs:	Weight:
AR 17S	17' - 5.18"	18	10.50kg

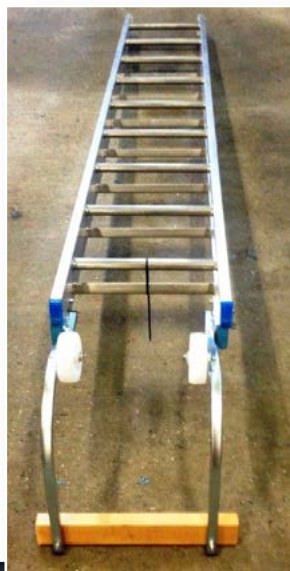

• Other sizes can be manufactured on request

**PLATFORM STEP LADDER
WITH HAND RAIL**



CODE	CIOSED HEIGHT	PLAT. HEIGHT	DESCRIPTION
PL03	1.82m	0.80m	3 STEP
PL04	2.0m	1.10m	4 STEP
PL05	2.26m	1.30m	5 STEP
PL06	2.52m	1.62m	6 STEP
PL07	2.9m	1.86m	7 STEP

**DOUBLE SIDED STEP LADDER
BOX SECTION**



CODE	CLOSED HEIGH	DESCRIPTION
STEP03	1.00m	3 STEP
STEP04	1.20m	4 STEP
STEP05	1.50m	5 STEP
STEP06	1.75m	6 STEP
STEP07	2.00m	7 STEP
STEP08	2.25m	8 STEP
STEP10	2.70m	10 STEP

**SINGLE SIDED STEP LADDER
WITH TOOL TRAY**



COD	CLOSED HEIGH	DESCRIPTION
SST04	1.40m	4 STEP
SST05	1.70m	5 STEP
SST06	1.95m	6 STEP
SST07	2.20m	7 STEP
SST08	2.45m	8 STEP
SST10	2.70m	10 STEP

**MOBILE SAFETY STEPS
MADE TO ORDER**



WAREHOUSE STEP LADDER



CODE	CLOSED HEIGHT	DESCRIPTION
WARE02	0.55m	2 STEP
WARE03	0.80m	3 STEP
WARE04	1.05m	4 STEP
WARE05	1.27m	5 STEP
WARE06	1.54m	6 STEP
WARE07	1.85m	7 STEP

• Other sizes can be manufactured on request

Extendable Podium Ladders Aluminium & Fiberglass

BS - EN131 Standard



Extendable Podium Ladders

Aluminium & Fibreglass

BS - EN131 Standard



CLOSED STEPS	OPEN STEPS	CLOSED HEIGHT	OPENED HEIGHT	ALUMINIUM WEIGHT (KG)	FIBERGLASS WEIGHT (KG)
4	6	3' 4" 1.10m	5' 4" 1.62m	23	30
5	8	4' 6" 1.36m	7' 2.14m	26	33
6	9	5' 5" 1.64m	7' 9" 2.36m	31	37
7	11	6' 2" 1.88m	9' 9" 2.95m	34	44

Extendable Podium Ladders

The Aluminium Extendable Podium Ladder is a high quality working platform. This Podium is designed for one man operation and can be quickly and simply adjusted to various heights. It is fitted with rubber wheels and is easy to manoeuvre.

It is safe and stable and is suited for all site work and maintenance work. It is designed to fold flat and be store in a small area, it will pass through a standard doorway and can be transported on car roof rack.



Key Features

- Fully Passed BS EN 131
- Complies with The Safety At Work Act
- Adjustable Working Height
- One man operation
- Guard Hand Rail on all sides 360 degrees
- Assembled and Dismantled in Minutes
- Solid, Large Platform with toobar.
- Large Tool Tray (Optional Extra)
- Adjustable for use on a stairs.
- Easily Moved, Transported And Stored.

Fixed Height Aluminium & Fiberglass Podium Box Section

Fiberglass

BS - EN131 Standard

Aluminium



NO. OF STEPS	PLATFORM HEIGHT
2 STEP	0.55m
3 STEP	0.80m
4 STEP	1.05m

NO. OF STEPS	PLATFORM HEIGHT
2 STEP	0.55m
3 STEP	0.80m
4 STEP	1.05m
5 STEP	1.27m
6 STEP	1.54m
7 STEP	1.85m



Fibreglass Channel Section Fixed Podium

NO. OF STEPS	PLATFORM HEIGHT
2 STEP	0.48m
3 STEP	0.72m
4 STEP	0.96m
5 STEP	1.20m
6 STEP	1.44m
7 STEP	1.68m
8 STEP	1.92m
9 STEP	2.16m
10 STEP	2.40m

• Other sizes can be manufactured on request

Aluminium Step Ladders

Double sided - BS.2037 Standard

Heavy duty Double Sided Step Ladder,
constructed with Chanel Stile, Thread & Locking Device



Ref No:	Height:	Treads:	Weight:
ASL 75	2' 6" - 0.75m	3	5.00kg
ASL 1.0	3' 4" - 1.00m	4	7.50kg
ASL 1.5	4' 11" - 1.50m	6	10.00kg
ASL 2.0	6' 6" - 2.00m	8	12.75kg
ASL 2.5	8' 2" - 2.50m	10	17.00kg

Fibreglass Step Ladders

Double sided - BS.2037 Standard

Heavy duty Double Sided non conductive Step Ladder for Electrical
and Industrial use. Chanel Stile and Aluminium Thread.



Ref No:	Height:	Treads:	Weight:
FSL 75	2' 6" - 0.75m	3	5.00kg
FSL 1.0	3' 4" - 1.00m	4	7.50kg
FSL 1.5	4' 11" - 1.50m	6	10.00kg
FSL 2.0	6' 6" - 2.00m	8	15.50kg
FSL 2.5	8' 2" - 2.50m	10	20.05kg

Fibreglass Ladders

BS.EN131 Standard

Constructed from Glass re-enforced plastic with Aluminium rung. Suitable for Electrical/Industrial use. Carrying capacity of 150kgs.

Double Section Roped Ladder

Ref No:	Closed Ht:	Extended Ht:	Rungs:	Weight:
FIB 20	12' 0"	20'	2 x 12	26.5kg
FIB 30	17' 0"	30'	2 x 18	32.9kg

Triple Section Roped Ladder


Ref No:	Closed Ht:	Extended Ht:	Rungs:	Weight:
FIBR 30	12'	30'	3 x 12	38.0kg

Double Section Push-up Ladder

Ref No:	Closed Ht:	Extended Ht:	Rungs:	Weight:
FIBR 14	8' 6"	14'	2 x 9	12.0kg



Foot

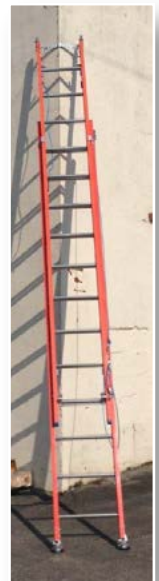

Clutch

Wheel

- Other sizes can be manufactured on request
- Single section ladders available

Combination Ladders



CLOSED STEP LADDER



EXTENDED STEP LADDER



ADJUSTABLE STEP LADDER



FULLY EXTENDED LADDER



CLOSED EXTENSION LADDER



SCAFFOLDING



	LADDER HEIGHT	STEP LADDER HEIGHT	STORAGE
COMB 03	10' (3.04m)	3'/5' (0.91-1.5m)	3'4" (1.01m)
COMB 04	13'9" (4.19m)	4'/6'7" (1.21-2m)	4' (1.21m)
COMB 05	17'4" (5.28m)	4'11"/8'5" (1.49-2.56m)	4'11" (1.49m)
COMB 06	21'2" (6.5m)	5'4"/9'9" (1.6-2.9m)	6'3" (1.9m)

Carlow Road,
Stradbally, Co. Laois

Tel: +353 57 86 25140

Fax: +353 57 86 25470

Email: sales@stradballyladders.com

Web: www.stradballyladders.com

STRADBALLY LADDERS

Hedge Trimming Tripod

(Landscape or Orchard Ladder)



Extendable Tripod
(back leg)



<u>No. Steps</u>	<u>Height (M)</u>	<u>Height (")</u>
6	1.90m	6ft 3in
8	2.43m	8ft
10	2.97m	9ft 9in

The tripod ladder is a highly specialised ladder engineered for orchard and landscaping work such as hedge trimming, pruning, training and fruit harvest operations. Single back leg provides relatively stable support on uneven terrain.

The tripod ladder is manufactured from aluminium and the rungs are textured to reduce slippage.

The tripod ladder is designed to be positioned by hand for maximum safety, allowing the user to precisely position the ladder to avoid holes or other hazards. The back of the ladder should be towards the tree or hedge centre. Top of ladder should not be used as a step.

FEATURES:

- Extendable Tripod (back leg)
- Extra strong extruded side rail
- Wide base for stability
- Self-locking hinge
- Wide anti-slip aluminium threads
- Tool Tray