


Bale clamp

integral sideshift


PBK

The **bale clamp PBK** is made with double T steel profiles. This type of profile supports excellent visibility through the clamp and allows for a reduced lost load centre. The smooth and flush arms allows for dense stacking of bales. A integral sideshift is fitted as standard.

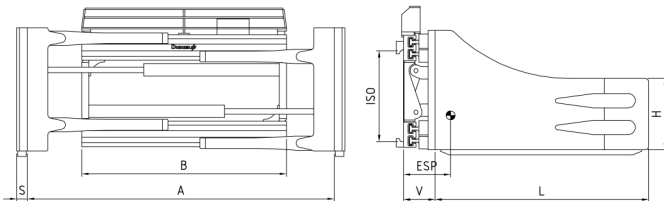

type	lift truck capacity tons	ISO	capacity kg/mm LC	opening range A ITI mm	B mm	height H mm	length L mm	S mm	V LLC mm	ESP COG mm	weight kg
PBK 20	2,0	II	1650/500	520-1700	980	350	800	30	166	197	445
				520-1700	980		1000			232	480
				560-1760	1050		800			195	455
				560-1760	1050		1000			230	490
PBK 25	2,5	II	2300/500	520-1700	980	350	1000	30	166	228	488
				520-1700	980		1200			283	520
				560-1760	1050		1000			225	498
				560-1760	1050		1200			280	530
				560-1860	1150		1000			222	510
				560-1860	1150		1200			277	542
PBK 30	3,0	III	2700/500	560-1760	1050	400	1000	35	171	232	615
				560-1760	1050		1200			287	660
				560-1860	1150		1000			227	630
				560-1860	1150		1200			282	675
				600-2250	1350		1000			220	660
				600-2250	1350		1200			275	705
PBK 35	3,5	III	3000/500	560-1860	1150	450	1000	40	178	240	795
				560-1860	1150		1200			295	848
				600-2250	1350		1000			235	825
				600-2250	1350		1200			290	878
PBK 40	4,0	III	3200/600	560-1860	1150	450	1200	40	185	300	858
				560-1860	1150		1400			353	908
				600-2250	1350		1200			295	888
				600-2250	1350		1400			348	938
PBK 45	4,5-5,0	III	3600/600	520-2120	1350	450	1200	40	188	298	895
				520-2120	1350		1600			400	995
				560-2360	1550		1200			290	930
				560-2360	1550		1600			390	1030

- 2 hydraulic functions required
- includes hoses and couplings
- other arm lengths upon request
- cylinder protection upon request
- constant sideshift +/- 100 mm upon request
- bronze fork bearings upon request
- wear strips under frame upon request
- wear strips welded under arms as standard

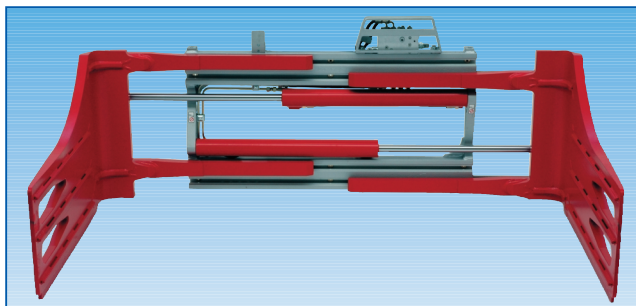

DURWEN
Anbaugeräte für Gabelstapler

Kompetenz seit mehr als 50 Jahren