




**B.26PM**  
**SHOTBOLT SOLENOID**  
**LOCKING POWER OFF**  
**WITH POSITION MONITORING**  
**IP54**

**BDC.26PM and BAC.26PM**

- Maximum radial force: **135kg**
- Plunger output and input force: **500g**
- Stroke: **11mm**
- Mounting in all positions.
- Standard voltage: **24V DC - 230V AC**
- Possible voltages: **12V - 220V DC**  
**110V - 230V AC (-10%, +5%)**
- Power: **18W - 100% (Permanent service)**
- Return spring: **Internal**
- Position Monitoring: **1 NC safety forced open contact**
- According to standards: **EN 60947-5-1**
- AC 15 : 250V-3A / 3x10<sup>4</sup> cycles
- DC 13 : 24V=20W (L/R = 40ms) 5x10<sup>5</sup> cycles
- Protection rating: **IP54**
- Service operating temperature: **-5°C, +40°C**
- Temperature rating: **B**
- Total weight: **1.1Kg**

**Example of use:**

- Securing dangerous machines according to standards EN292, EN1088, EN60204-1 and EN60947-5-1
- Locking moving guards
- Locking doors accessing dangerous areas
- Locking covers
- Any locking requiring resistant parts and detecting the plunger position.

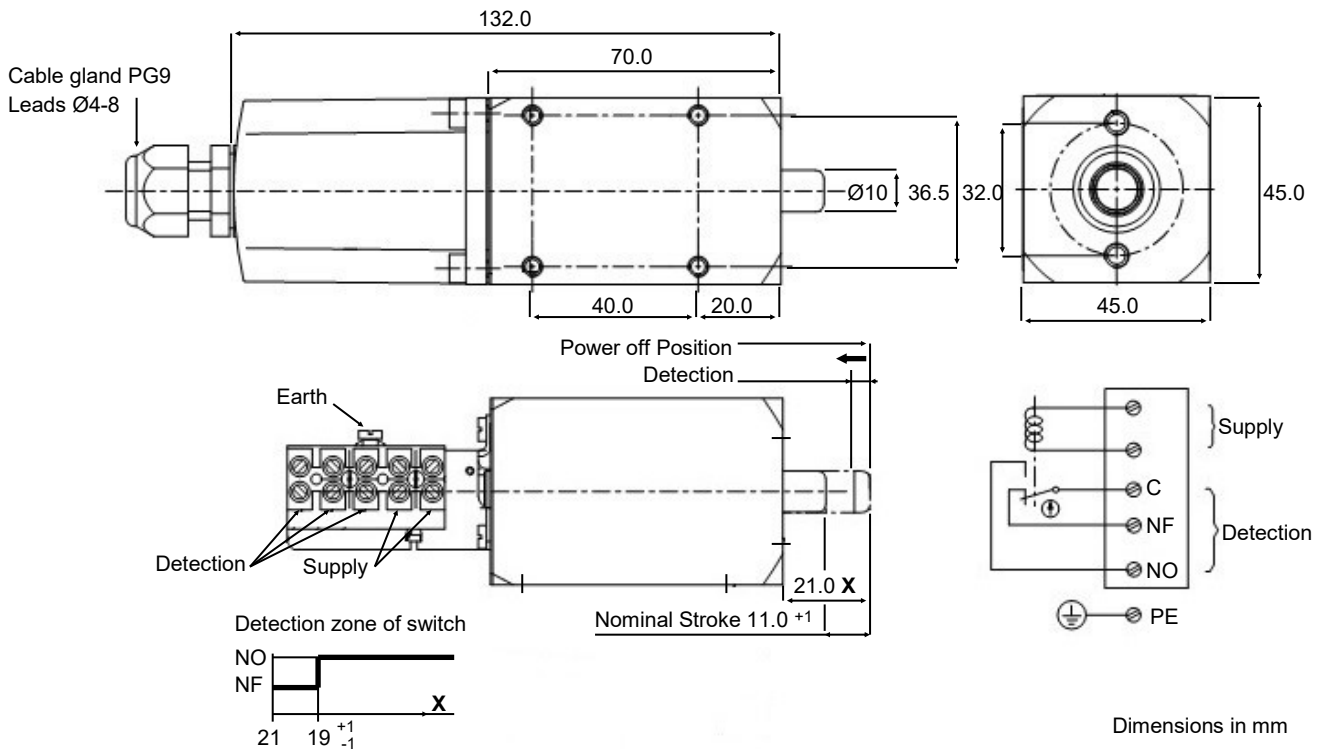

We reserve the right to alter or amend designs without prior notice.

B26 Rev 2 - 2017

**HE & BS Benson Ltd**

**1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR**

**T. +44(0)1638 663535 — 663130 F. +44(0)1638 667434 E. sales@hebsbenson.co.uk www.hebsbenson.co.uk**