

ULTRA III

Features

Our Ultra III system, is a induction hardened single-wall pipe that utilizes CCI-lined (chrome carbide) weld ends for added pipe end protection. Ultra III systems will match up best with cast manganese elbows, hardened steel reducers and backend kits.

Specifications

Heat Treatment

Induction Hardened

System

DN125/5

Wall Thickness

4.8mm/.188"

Hardness

Up to 57HRc

Working Pressure

85 bar (1233psi)

Pipe Weight

10.1 lbs/ft (15 kg/m)

FWC Weight


29.5 lbs/ft (43.9 kg/m)

Complete System

- Ultra III Deck Pipe
- Hardened Steel Reducers
- Hardened, Cast Steel Backend Kit
- Cast Manganese Elbows

Ultra III DN125/5 Boom Tube
with 148mm chrome carbide insert (CCI) weld ends

Length (in)	Length (mm)	Approx. Shipping Weight (lbs / Kg)	Part Number
39.37	1000	37 / 17	B4873937MH
78.75	2000	70 / 32	B4877875MH
118.12	3000	103 / 47	B487B812MH
157.50	4000	136 / 62	B487F750MH
Make up length (consult factory)			B487___MH
Other lengths are available upon request. Consult Factory			

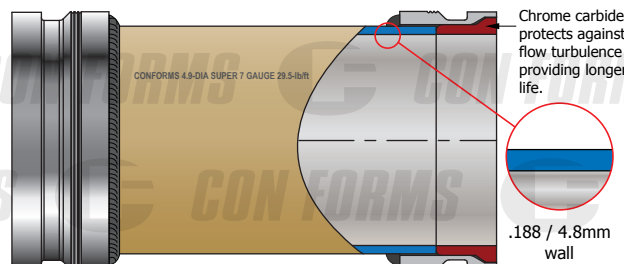

800-223-3676



CONFORMS.COM

