




Display Showcase Lighting

Magnetic Track Pole Lighting

Magnetic Track Pole Lighting	Specifications	
Round Track Pole	Length	Maximum to 2000 mm
	Body Color	Black/Silver
	Diameter	14 mm
Available in:		
< 300 mm		
300-500mm		
500-700mm		
700-1000mm		
1000-1200mm		
1200-1500 mm		
1500-1700 mm		
1700-2000mm		

Magnetic Track Pole Lighting	Specifications	
Flat Track Pole	Length	Maximum to 2000 mm
	Body Color	Black/Silver
	W*H	16 mm*6 mm
Available in:		
< 300 mm		
300-500mm		
500-700mm		
700-1000mm		
1000-1200mm		
1200-1500 mm		
1500-1700 mm		
1700-2000mm		

Magnetic Track Pole Lighting	Specifications	
Magnetic Flat Track Pole	Length	Maximum to 2000 mm
	Body Color	Black/Silver
	W*H	16 mm*6 mm
Available in:		
< 300 mm		
300-500mm		
500-700mm		
700-1000mm		
1000-1200mm		
1200-1500 mm		
1500-1700 mm		
1700-2000mm		





Track Connector





Power Connector

Display Showcase Lighting

Magnetic Track Pole Lighting	Specifications	
LUB7517-P-2W	LEDs	Cree
	Power	1*2W
	Lums	180lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	8 / 25 / 45 / 80
	Body Color	Black / Silver
	Head	φ17 mm*40 mm
	Base	L60 mm*T8mm
	Voltage	DC 12 V




Magnetic Track Pole Lighting	Specifications	
LUB7518-P-1W	LEDs	Cree
	Power	1*1W
	Lums	130 lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	30
	Body Color	Black / Silver
	Head	φ17 mm*35 mm
	Base	L60 mm*T8mm
	Voltage	DC 12 V

Magnetic Track Pole Lighting	Specifications	
LUB7511-P-3W	LEDs	Cree
	Power	3*1W
	Lums	300 lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	110
	Body Color	Black / Silver
	Head	φ38 mm*35 mm
	Base	L60 mm*T8mm
	Voltage	DC 12 V


Magnetic Track Pole Lighting	Specifications	
LUB7522-P-5W	LEDs	Cree
	Power	5*1W
	Lums	500 lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	110
	Body Color	Black / Silver
	Head	φ60 mm*30 mm
	Base	L60 mm*T8mm
	Voltage	DC 12 V


Display Showcase Lighting


Mini Showcase Track Lighting

Mini Showcase Track Lighting		Specifications	
Track Rail		Length	1000mm /1500mm /2000 mm
	Body Color	Black / White	
	W*H	22 mm*12 mm	
	Available in:		
	< 300 mm 300-500mm 500-700mm 700-1000mm 1000-1200mm 1200-1500 mm 1500-1700 mm 1700-2000mm		
Mini Showcase Track Lighting		Specifications	
LUA7316-T-3W		LEDs	Bridgelux
	Power	1*3W	
	Lums	180lm	
	CCT	3000K / 4500K / 6000K	
	Beam Angle	15 / 30 / 60	
	Body Color	Chrome (Black / Silver)	
	Head	φ23 mm*42 mm	
	Height	40 mm	
	Voltage	DC 12 V	
	Mini Showcase Track Lighting		Specifications
LUA7317-T-3W		LEDs	Bridgelux
	Power	1*3W	
	Lums	180lm	
	CCT	3000K / 4500K / 6000K	
	Beam Angle	30	
	Body Color	Chrome (Black / Silver)	
	Head	φ18 mm*42 mm	
	Height	40 mm	
	Voltage	DC 12 V	
	Mini Showcase Track Lighting		Specifications
LUA7318-T-1W		LEDs	Cree
	Power	1*1W	
	Lums	130lm	
	CCT	3000K / 4500K / 6000K	
	Beam Angle	30	
	Body Color	Chrome (Black / Silver)	
	Head	φ15 mm*45 mm	
	Height	40 mm	
	Voltage	DC 12 V	

Display Showcase Lighting

Mini Showcase Track Lighting	Specifications	
LUA7318-T-3W		
 <p>LUA 7318-T-3W</p>	LEDs Power Lums CCT Beam Angle Body Color Head Height Voltage	Cree 1*3W 210lm 3000K / 4500K / 6000K 30 Chrome (Black / Silver) φ15 mm*45 mm 40 mm DC 12 V

Mini Showcase Track Lighting	Specifications	
LUA7319-T-3W		
 <p>LUA 7319-T-3W</p>	LEDs Power Lums CCT Beam Angle Body Color Head Height Voltage	Bridgelux 1*3W 180lm 3000K / 4500K / 6000K 15 / 30 / 60 Chrome (Black / Silver) φ23 mm*50 mm 40 mm DC 12 V

Mini Showcase Track Lighting	Specifications	
LUA711-T-3W		
 <p>LUA 711-T-3W</p>	LEDs Power Lums CCT Beam Angle Body Color Head Height Voltage	Bridgelux 3*1W 300lm 3000K / 4500K / 6000K 110 Chrome (Black / Silver) φ40 mm*50 mm 40 mm DC 12 V

Display Showcase Lighting



Rotating LED Bar


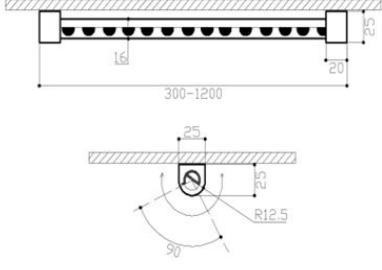
Rotating LED Bar	Specifications	
LUA8426	LEDs	5730
	Power	10W per 600 mm
	Lums	1300 lm per meter
	CCT	3000K / 4500K / 6000K
	Beam Angle	110
	Body Color	Aluminum Color (Black / Silver)
	Length	200 to 600 mm; longer can customized
	Height	100 to 400 mm
	Voltage	DC 12 V

Rotating LED Bar	Specifications	
LUA8427-COB	LEDs	COB
	Power	12W per meter
	Lums	1300 lm per meter
	CCT	3000K / 4500K / 6000K
	Beam Angle	110
	Body Color	Aluminum Color (Black / Silver)
	Length	Max. 2000 mm; Longer can customized
	Height	Max.400 mm; Higher can customized
	Voltage	DC 24 V
	Available in:	
	<350 mm	
350-700 mm		
700-1000 mm		
1000-1350 mm		
1350-1700 mm		
1700-2000 mm		
2000-2350 mm		

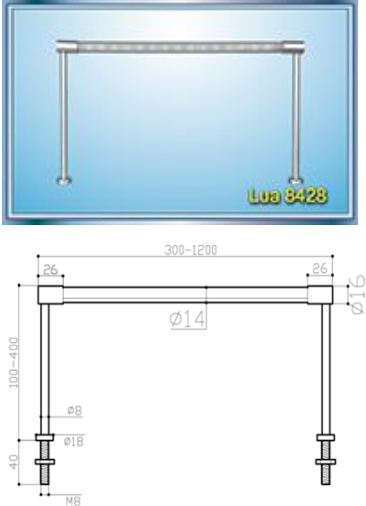
Rotating LED Bar	Specifications	
LUA8427-5050	LEDs	5050
	Power	18W per meter
	Lums	1300 lm per meter
	CCT	3000K / 4500K / 6000K
	Beam Angle	110
	Body Color	Aluminum Color (Black / Silver)
	Length	Max. 2000 mm; Longer can customized
	Height	Max.400 mm; Higher can customized
	Voltage	DC 12 V
	Available in:	
	<350 mm	
350-700 mm		
700-1000 mm		
1000-1350 mm		
1350-1700 mm		
1700-2000 mm		
2000-2350 mm		


Display Showcase Lighting

Rotating LED Bar	Specifications	
LUA8427-1-COB	LEDs	COB
 	Power	12W per meter
	Lums	1300 lm per meter
	CCT	3000K / 4500K / 6000K
	Beam Angle	110
	Body Color	Aluminum Color (Black / Silver)
	Length	Max. 2000 mm; Longer can customized
	Voltage	DC 24 V
	Available in:	
	<350 mm	
	350-700 mm	
700-1000 mm		
1000-1350 mm		
1350-1700 mm		
1700-2000 mm		
2000-2350 mm		

Rotating LED Bar	Specifications	
LUA8427-1-5050	LEDs	5050
 	Power	18W per meter
	Lums	1300 lm per meter
	CCT	3000K / 4500K / 6000K
	Beam Angle	110
	Body Color	Aluminum Color (Black / Silver)
	Length	Max. 2000 mm; Longer can customized
	Voltage	DC 12 V
	Available in:	
	<350 mm	
	350-700 mm	
700-1000 mm		
1000-1350 mm		
1350-1700 mm		
1700-2000 mm		
2000-2350 mm		


Display Showcase Lighting


Rotating LED Bar	Specifications	
LUA8428-2835	LEDs	2835
	Power	18W per meter
	Lums	1300 lm per meter
	CCT	3000K / 4500K / 6000K
	Beam Angle	110
	Body Color	Aluminum Color (Black / Silver)
	Length	Max. 2000 mm; Longer can customized
	Height	Max.400 mm; Higher can customized
	Voltage	DC 12 V
	Available in:	
	<350 mm	
350-700 mm		
700-1000mm		
1000-1350 mm		
1350-1700 mm		
1700-2000 mm		


Rotating LED Bar	Specifications	
Dimmer	Brightness adjustable	Color temperature adjustable
	Available in:	
	Single Knob Dimmer DC12V/24V 8A	
	Two Knob Dimmer DC10-30V 8A per CH.	
	Three Knob Dimmer DC10-30V 6A per CH.	
Auto Dimmer		


Display Showcase Lighting

Mini LED Spotlights


Mini LED Spotlights	Specifications	
LUA7316-C-3W	LEDs	Bridgelux
	Power	1*3W
	Lums	180lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	15 / 30 / 45 / 60
	Body Color	Black (Silver)
	Head	φ24 mm*35 mm
	Install	φ12 mm


Mini LED Spotlights	Specifications	
LUA7317-C-3W	LEDs	Cree
	Power	1*3W
	Lums	180lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	8 / 25 / 45 / 80
	Body Color	Black (Silver)
	Head	φ18 mm*35 mm
	Install	φ12 mm


Mini LED Spotlights	Specifications	
LUA7318-C-1W	LEDs	Cree
	Power	1*1W
	Lums	130lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	30
	Body Color	Black (Silver)
	Head	φ15mm*24 mm
	Install	φ12 mm


Mini LED Spotlights	Specifications	
LUA313-C-1W	LEDs	Bridgelux
	Power	1*1W
	Lums	90lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	110
	Body Color	Black (Silver)
	Head	φ20mm*20 mm
	Install	φ12 mm

Display Showcase Lighting


Mini LED Spotlights	Specifications	
LUB7517-3-2W	LEDs	Cree
	Power	1*2W
	Lums	180 lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	8 / 25 / 45 / 80
	Body Color	Black / Silver
	Head	φ17mm*40 mm
	Install	Surface Mounted


Mini LED Spotlights	Specifications	
LUB7518-3-1W	LEDs	Cree
	Power	1*1W
	Lums	130 lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	30
	Body Color	Black / Silver
	Head	φ15mm*35 mm
	Install	Surface Mounted


Mini LED Spotlights	Specifications	
LUB7511-3-3W	LEDs	Cree
	Power	1*3W
	Lums	300 lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	110
	Body Color	Black / Silver
	Head	φ38mm*35 mm
	Install	Surface Mounted


Mini LED Spotlights	Specifications	
LUB7522-3-5W	LEDs	Cree
	Power	1*5W
	Lums	450 lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	110
	Body Color	Black / Silver
	Head	φ60mm*30 mm
	Install	Surface Mounted

Display Showcase Lighting

Mini LED Spotlights	Specifications	
LUA7316-3-3W	LEDs	Bridgelux
	Power	1*3W
	Lums	180lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	15 / 30 / 45 / 60
	Body Color	Chrome (Black / Silver)
	Head	φ23 mm*43 mm
	Install	φ12 mm

Mini LED Spotlights	Specifications	
LUA7317-3-3W	LEDs	Bridgelux
	Power	1*3W
	Lums	180lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	30
	Body Color	Chrome (Black / Silver)
	Head	φ18 mm*40 mm
	Install	φ12 mm

Mini LED Spotlights	Specifications	
LUA7317-3E-3W	LEDs	Bridgelux
	Power	1*3W
	Lums	180lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	30
	Body Color	Aluminum color (Black / Silver)
	Head	φ18 mm*38 mm
	Install	φ12 mm


Mini LED Spotlights	Specifications	
LUA7318-3-1W	LEDs	Cree
	Power	1*1W
	Lums	130lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	30
	Body Color	Chrome (Black / Silver)
	Head	φ15 mm*42 mm
	Install	φ12 mm


Display Showcase Lighting


Mini LED Spotlights		Specifications	
LUA7255-3W		LEDs	Bridgelux
	Power	1*3W	
	Lums	180lm	
	CCT	3000K / 4500K / 6000K	
	Beam Angle	15 / 30 / 45 / 60	
	Body Color	Aluminum color (Black / Silver)	
	Panel Diameter	37 mm	
	Height	26 mm	
	Opening	28 mm	
Mini LED Spotlights		Specifications	
LUA7257-3W		LEDs	Bridgelux
	Power	1*3W	
	Lums	180lm	
	CCT	3000K / 4500K / 6000K	
	Beam Angle	15 / 30 / 45 / 60	
	Body Color	Aluminum color (Black / Silver)	
	Panel Diameter	50 mm	
	Height	21 mm	
	Opening	42 mm	
Mini LED Spotlights		Specifications	
LUA7258-3W		LEDs	Bridgelux
	Power	1*3W	
	Lums	180lm	
	CCT	3000K / 4500K / 6000K	
	Beam Angle	30	
	Body Color	Black (Silver)	
	Panel Diameter	37 mm	
	Height	25 mm	
	Opening	28 mm	
Mini LED Spotlights		Specifications	
LUA7258-D-3W		LEDs	Bridgelux
	Power	1*3W	
	Lums	180lm	
	CCT	3000K / 4500K / 6000K	
	Beam Angle	60	
	Body Color	Black / Silver	
	Panel Diameter	50 mm	
	Height	27 mm	
	Opening	40 mm	

Display Showcase Lighting


LED Standing Spotlights


LED Standing Spotlights	Specifications	
LUA2302-3W	LEDs	Bridgelux
	Power	3*1W
	Lums	300lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	110
	Body Color	Chrome (Black / Silver)
	Head	φ18 mm*77 mm
	Rod Height	200 / 300 / 400 mm Adjustable
	Install	φ11mm


LED Standing Spotlights	Specifications	
LUA2601-3W	LEDs	Bridgelux
	Power	3*1W
	Lums	300lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	15 / 30 / 45
	Body Color	Chrome (Black / Silver)
	Head	80 mm*15 mm*10 mm
	Rod Height	200 / 300 / 400 mm Adjustable
	Install	φ11mm


LED Standing Spotlights	Specifications	
LUA2601-2W	LEDs	Bridgelux
	Power	2*1W
	Lums	200lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	110
	Body Color	Chrome (Black / Silver)
	Head	60 mm*15 mm*10 mm
	Rod Height	200 / 300 / 400 mm Adjustable
	Install	φ11mm

Display Showcase Lighting


LED Standing Spotlights	Specifications	
LUA2801-3W	LEDs	Cree
	Power	3*1W
	Lums	300lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	110
	Body Color	Chrome (Black / Silver)
	Head	80 mm*20 mm*10 mm
	Rod Height	200 / 300 / 400 mm Adjustable
	Install	φ11mm


LED Standing Spotlights	Specifications	
LUA711-3W	LEDs	Cree
	Power	3*1W
	Lums	300lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	110
	Body Color	Chrome (Black / Silver)
	Head	φ40 mm*38 mm
	Rod Height	200 / 300 / 400 mm Adjustable
	Install	φ11mm


LED Standing Spotlights	Specifications	
LUA2511-3W	LEDs	5730
	Power	6*0.5W
	Lums	300lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	110
	Body Color	Chrome / Black / Silver
	Head	φ6 mm*100 mm
	Total Height	200 / 300 / 400 mm Adjustable
	Install	φ11mm


LED Standing Spotlights	Specifications	
LUA2404	LEDs	5730
	Power	8W per 400 mm
	Lums	480 lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	110
	Body Color	Aluminum Color (Black / Silver)
	Head	φ6 mm
	Total Height	Maximum to 400 mm Adjustable
	Install	φ11mm

Display Showcase Lighting


LED Standing Spotlights	Specifications	
LUA7316-3W Adjustable	LEDs	Bridgelux
	Power	1*3W
	Lums	180lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	15 / 30 / 45 / 60
	Body Color	Chrome (Black / Silver)
	Head	φ23 mm*43 mm
	Rod Height	200 / 300 / 400 mm Adjustable
	Install	φ11mm


LED Standing Spotlights	Specifications	
LUA7317-3W Adjustable	LEDs	Bridgelux
	Power	1*3W
	Lums	180lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	30
	Body Color	Chrome (Black / Silver)
	Head	φ18 mm*40 mm
	Rod Height	200 / 300 / 400 mm Adjustable
	Install	φ11mm


LED Standing Spotlights	Specifications	
LUA7316-3W Fixed	LEDs	Bridgelux
	Power	1*3W
	Lums	180lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	15 / 30 / 45 / 60
	Body Color	Aluminum Color (Black / Silver)
	Head	φ23 mm*43 mm
	Rod Height	Maximum to 400 mm Fixed
	Install	φ6mm


LED Standing Spotlights	Specifications	
LUA7317-3W Fixed	LEDs	Bridgelux
	Power	1*3W
	Lums	180lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	30
	Body Color	Aluminum Color (Black / Silver)
	Head	φ18 mm*40 mm
	Rod Height	Maximum to 400 mm Fixed
	Install	φ6mm

Display Showcase Lighting


LED Standing Spotlights	Specifications	
LUA7318-1W	LEDs	Cree
	Power	1*1W
	Lums	130lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	30
	Body Color	Chrome (Black / Silver)
	Head	φ15 mm*45 mm
	Rod Height	200 / 300 / 400 mm Adjustable
	Install	φ11mm


LED Standing Spotlights	Specifications	
LUA7318-3W	LEDs	Cree
	Power	1*3W
	Lums	210lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	30
	Body Color	Chrome (Black / Silver)
	Head	φ15 mm*55 mm
	Rod Height	200 / 300 / 400 mm Adjustable
	Install	φ11mm


LED Standing Spotlights	Specifications	
LUA7319-1W	LEDs	Bridgelux
	Power	1*1W
	Lums	90lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	15 / 30 / 45 / 60
	Body Color	Chrome (Black / Silver)
	Head	φ23 mm*50 mm
	Rod Height	200 / 300 / 400 mm Adjustable
	Install	φ11mm


LED Standing Spotlights	Specifications	
LUA7319-3W	LEDs	Bridgelux
	Power	1*3W
	Lums	180 lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	15 / 30 / 45 / 60
	Body Color	Chrome (Black / Silver)
	Head	φ23 mm*50 mm
	Rod Height	200 / 300 / 400 mm Adjustable
	Install	φ11mm

Display Showcase Lighting


LED Standing Spotlights	Specifications	
LUA2412-3W	LEDs	Bridgelux
	Power	3*1W
	Lums	250lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	110
	Body Color	Aluminum Color (Black / Silver)
	Head	80*20*10mm
	Rod Height	200 / 300 / 400 mm Adjustable
	Install	φ11mm


LED Standing Spotlights	Specifications	
LUA2411-3W	LEDs	Bridgelux
	Power	3*1W
	Lums	250lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	110
	Body Color	Aluminum Color (Black / Silver)
	Head	80*25*12mm
	Rod Height	Maximum to 400 mm Fixed
	Install	φ6 mm


LED Standing Spotlights	Specifications	
LUA2411-2W	LEDs	Bridgelux
	Power	2*1W
	Lums	170lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	110
	Body Color	Aluminum Color (Black / Silver)
	Head	58*25*12mm
	Rod Height	Maximum to 400 mm Fixed
	Install	φ6 mm


LED Standing Spotlights	Specifications	
LUA2411-1W	LEDs	Bridgelux
	Power	1*1W
	Lums	90lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	110
	Body Color	Aluminum Color (Black / Silver)
	Head	25*23*12mm
	Rod Height	Maximum to 400 mm Fixed
	Install	φ6 mm

Display Showcase Lighting


LED Standing Spotlights	Specifications	
LUA7317-V-3W	LEDs	Bridgelux
	Power	2*3W
	Lums	360lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	30
	Body Color	Aluminum Color (Black / Silver)
	Head	φ18 mm*40 mm
	Total Height	150 mm to 600 mm, Fixed
	Interval	Customized, Fixed
	Install	φ6 mm


LED Standing Spotlights	Specifications	
LUA701-3W	LEDs	Bridgelux
	Power	3*1W
	Lums	300lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	25
	Body Color	Black / Silver
	Head	φ20*35mm
	Rod Height	310 mm / Customized, Fixed
	Install	φ8 mm


LED Standing Spotlights	Specifications	
LUA2003-3W	LEDs	Cree
	Power	3*1W
	Lums	300lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	25
	Body Color	Black / Silver
	Rod Diameter	24mm
	Total Height	195/295 mm/Customized, Fixed
	Install	φ8 mm

LED Standing Spotlights	Specifications	
LUA2003-5W	LEDs	Cree
	Power	5*1W
	Lums	500lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	25
	Body Color	Black / Silver
	Rod Diameter	24mm
	Total Height	300 mm / Customized, Fixed
	Install	φ8 mm

Display Showcase Lighting

LED Standing Spotlights	Specifications	
LUA2403-3W	LEDs	Bridgelux
	Power	3*1W
	Lums	300lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	25
	Body Color	Black / Silver / Golden
	Rod Diameter	16 mm
	Total Height	300 mm / Customized, Fixed
	Install	φ8 mm

LED Standing Spotlights	Specifications	
LUA7317-2-3W	LEDs	Bridgelux
	Power	1*3W
	Lums	180 lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	30
	Body Color	Aluminum Color (Black / Silver)
	Head	φ18 mm*40 mm
	Rod Height	86 / 190 / 240 / 340 mm, Fixed
	Install	φ11mm

LED Standing Spotlights	Specifications	
LUA2302-2-3W	LEDs	Bridgelux
	Power	3*1W
	Lums	300lm
	CCT	3000K / 4500K / 6000K
	Beam Angle	110
	Body Color	Chrome (Black / Silver)
	Head	φ18 mm*77 mm
	Soft Rod	100 mm
	Rigid Rod	Maximum to 400 mm, Fixed
	Install	φ11mm

Display Showcase Lighting

LED Standing Spotlights	Specifications	
LUA2405	LEDs Power Lums CCT Beam Angle Body Color Rod Diameter Total Height Install	2835 18W per 1000 mm 1300 lm per 1000 mm 3000K / 4500K / 6000K 110 Black / Silver φ16 mm Max. to 1500 mm, Adjustable φ18mm
	Available in:	
	<ul style="list-style-type: none"> L < 300 mm L 300-500 mm L 500-700 mm L 700-900 mm L 900-1100 mm L 1100-1300 mm L 1300-1500 mm 	