


## TALEXX CRYSTAL MODULES




**P560 PREMIUM MODULE**

**Product Code:**  
P560-CW150lm  
(7500k Crystal White)  
Art. No. 28000335

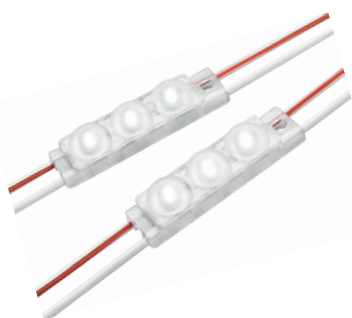

**P541 CLASSIC MODULE**

**Product Code:**  
P541-DL 31 lm Art. No. 28000362  
**Product Code:**  
P541-DL 45 lm Art. No. 28000363



**P551 SELECT MODULE**

**Product Code:**  
P551-DL 60lm  
Art. No. 28000366

**Module Colour:** DL - 6500K (Daylight)      **Operating Voltage:** 12 volt Constant Voltage

**IP Rating:** IP68 (submerged to 1mtr / 60 mins)      **Beam angle:** 155°

**ECA Compliant:** Yes      **Warranty:** 5 Years      **Minimum Can Depth:** >40mm

**Connections PSU:**

Input 110 - 260v AC: Brown - LIVE Blue - NEUTRAL      Output 12v DC: Red - POSITIVE (+) Black - NEGATIVE (-)

**Connections - Modules**

18AWG fig 8: Red Trace - POSITIVE (+) White - NEGATIVE (-)

### Maximum Cable Distances from PSU to 1st Module

Cable Cross Section:	0.5mm	0.75mm	1.00mm	1.50mm	2.50mm
K301 10va:	8.00m	12.00m	16.00m	24.00m	40.00m
LCU 15va:	5.30m	8.00m	10.60m	16.00m	26.60m
LCU 35va:	2.30m	3.40m	4.50m	6.80m	11.40m
LCU 60va:	1.30m	2.00m	2.60m	4.00m	6.60m
LCU 100va:	0.80m	1.20m	1.60m	2.00m	4.00m
LCU 150va:	0.50m	0.80m	1.00m	1.60m	2.60m

**Sales:** 01527 547521      **Email:** info@signgear.co.uk