

- High speed computer controlled network analyzer
- Fully featured graphical software for quartz crystal, ceramic resonator and network analyzer measurements
- Typical crystal measurement in less than 150ms
- Extensive drive level dependency measurements at 10ms per point
- Over 40 different crystal parameter measurements
- Precision FL measurements
- Multiple spurious sweeps
- Test fixtures available for SMD, leaded, blank and low frequency crystals
- All data is published in an ODBC compatible data base in real time
- Custom printouts can be created using *Crystal Reports*<sup>®</sup> (optional)
- Optional OLE interface available for custom C++ and Visual Basic applications



### SPECIFICATIONS






<b>Frequency Range:</b>	15 KHz to 500 MHz
<b>Frequency Correlation:</b>	± 1 ppm* at series (typical)
<b>Typical Crystal Power:</b>	100 pW to 1000 uW (1 MHz to 50 MHz) 1 nW to 500 uW (50MHz to 200 MHz)
<b>Channels:</b>	Two
<b>Computer Requirements:</b>	Minimum 500 MHz Pentium III, one full PCI slot with +5V & 3.3V power, <i>Windows XP</i> <sup>®</sup> or <i>Windows 10</i> <sup>®</sup> (64-bit)

\* Proprietary measurement and calibration algorithms provide correlation to industry standard crystal measurement equipment.

## SAUNDERS & ASSOCIATES, LLC

2520 E. Rose Garden Lane - Phoenix, Arizona 85050 USA (602) 971-9977 FAX (602) 971-5522  
E-Mail [sales@saunders-assoc.com](mailto:sales@saunders-assoc.com) - World Wide Web <http://www.saunders-assoc.com>

# Graphical Displays

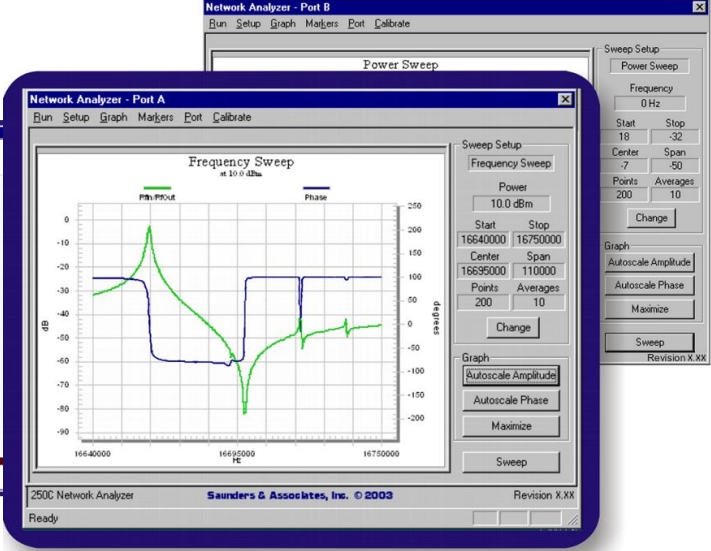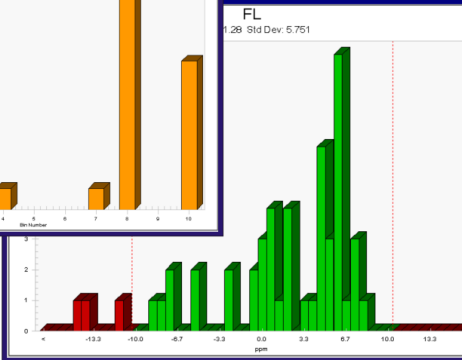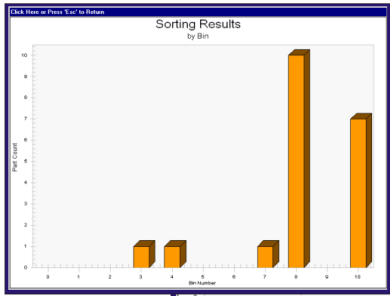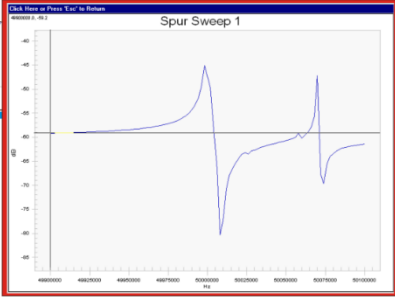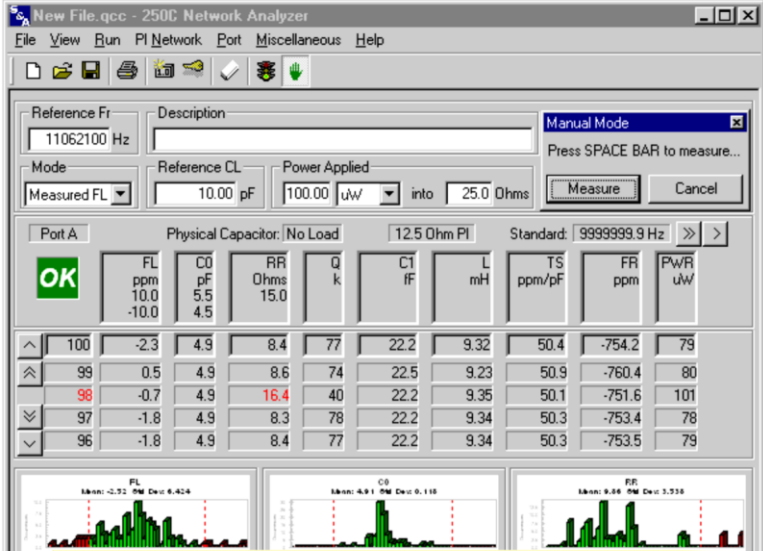

# SAUNDERS & ASSOCIATES, LLC