


B2
AC & DC LINEAR SOLENOID

Availability
AC or DC
PULL - THRUST - PULL & THRUST
Side Mount Fixing
For quiet hold, use DC
For operation over 50V
please enquire as to feasibility.



Solenoid shown in energised position

Weight complete 57g
Plunger weight 10g max

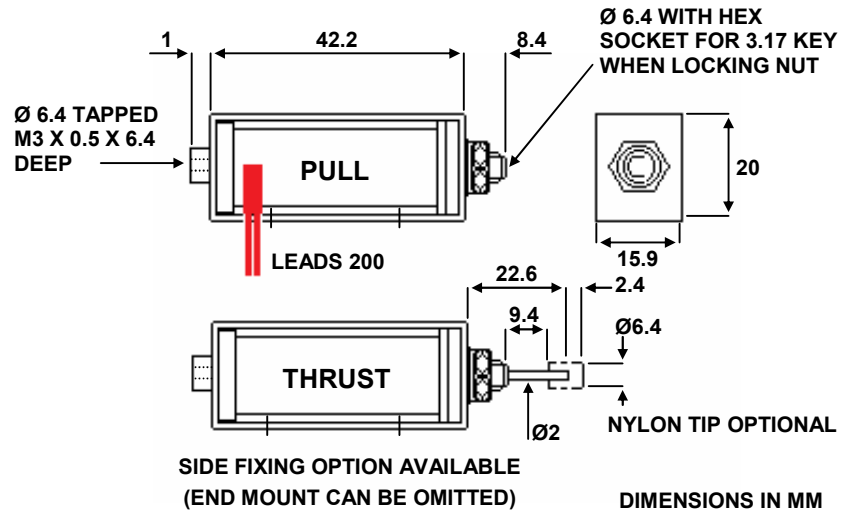

BAC2

BDC2

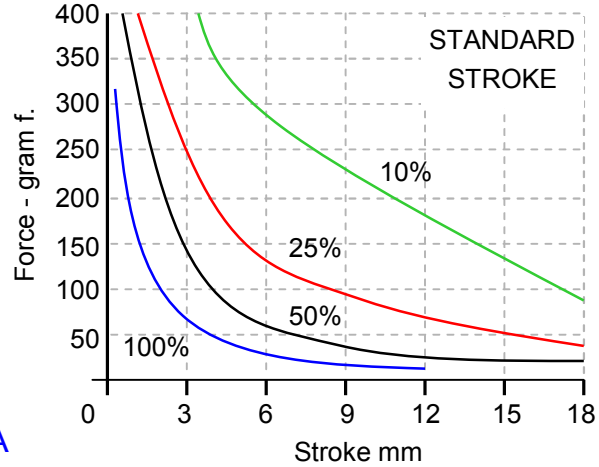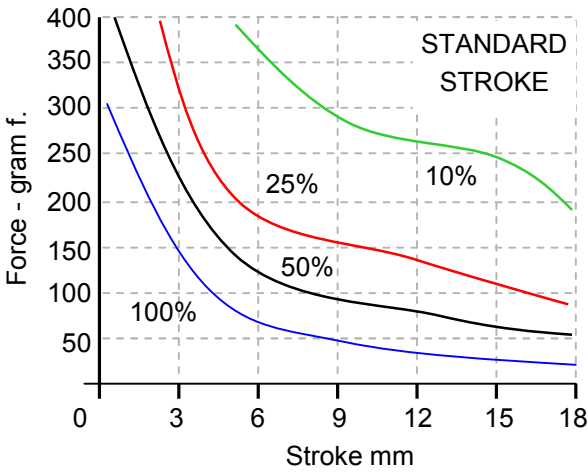

AC Closed VA
100% Rtg = 6.5VA
50% Rtg = 14VA
25% Rtg = 24VA
10% Rtg = 50VA

DC Watts
100% Rtg = 5W
50% Rtg = 10W
25% Rtg = 20W
10% Rtg = 50W

Forces shown are at working temperature
Cold forces are higher

** Please note: Fixing, plunger coupling, thrust rods and lead length can all be customised **
We reserve the right to alter or amend designs without prior notice.

HE & BS Benson Ltd

1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR

T. +44(0)1638 663535 – 663130 F. +44(0)1638 667434 E. sales@hebsbenson.co.uk www.hebsbenson.co.uk