
DIB-19



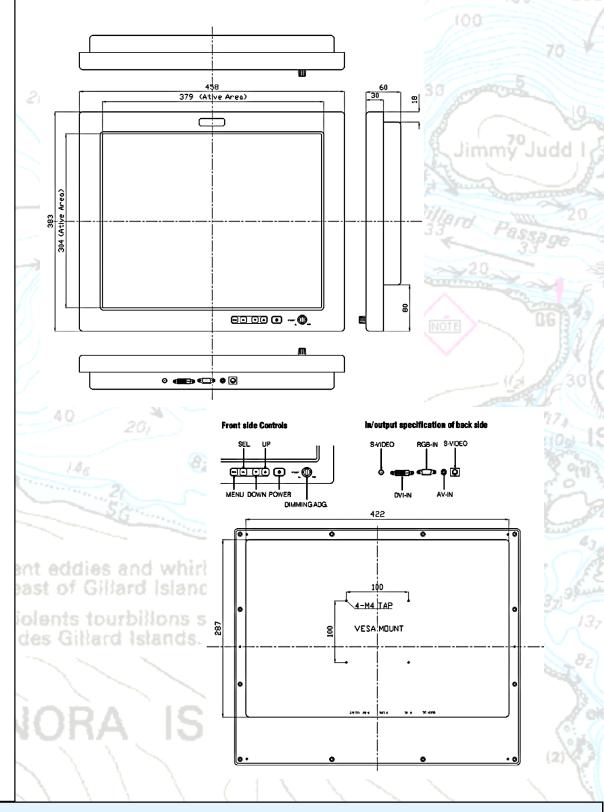

LED-Sunlight Readable Indoor LCD Monitor

This product features the latest in LCD technology with 1,000 nit LED backlights rated at 70,000 hours life. This product feature LED Backlights (Direct sunlight readable), optically bonded anti glare impregnated glass, perfect 1000:1 dimming, DVI, VGA, S-Video, Composite, and Mil Spec. OSD controls.

Features

- res Flood/Flot 10km Ebb/Jusant 8km
- --19.0" TFT LCD
- --1,280 X 1,024 resolution (SXGA)
- --12VDC 3.5A
- --Applications: In-Outdoor, Kiosk, Marine, Vehicles.

Big Bay

Display Size 19.0"

Resolution 1,280 x 1,024(SXGA)

Contrast Ratio 1,000:1

Brightness LED Backlight Type- 1,000 nit

Panel Surface Anti-Glare Coating(Option: Optical Bonded, Tempered

Glass)

Inputs DVI,VGA, Composite, S-Video,

Mounting Options VESA / Flush mounting

View Angle 170(H) 160 (V)

Response Time 1.3msec

Light Source Light Emitting Diodes

Input Voltage DC12V @ 2.5A (Option: AC 110/220V)

Power Consumption 38W

Out-dimensions 15.04"(W)x18.03"(H)x2.36"(D), 458(W)x383

(H)x60(D)mm

Operating Range -10C ~ 60C

Cases Color Black , Dark Gray

IP Rating Front Side:IP65, Rear Side:IP32

Warranty 2 yrs

Dimming Range 1000:1 (dimming control to dark to full bright)

Ebb/Jusant 8kn

Weight 14.4 LBS(6.5Kg)

Touch Screen Resistive, Capacitive

3 -----