STRAIGHTAWAY 250




TOP HUNG STRAIGHT SLIDING SYSTEM FOR DOORS UPTO 250KG EACH

DOOR SPECIFICATION

Maximum Door Weight 250Kg Maximum door Height **Timber Door Thickness** Metal Door Thickness Vertical Adjustment

4000mm 35mm - 55mm

40mm 6mm-8mm

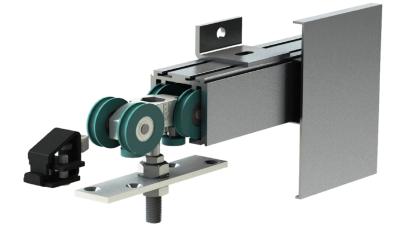

APPLICATIONS

Ideal for residential and commercial applications.

Designed for interior and exterior use of doors up to 250 Kg.

 Extremely smooth and silent gliding movement from use of precision ball bearings and high performance nylon wheels.

Easy and flexible installation options.

Ideal for Shop fronts, Offices and home stylish interiors.

 Designed to accommodate multiple doors which can slide to either side or all to the same side.

Hanger's options available for timber or metal doors.

The Aluminium track can be soffit fixed or face fixed to give installation flexibility.

Technical Data

Track: Aluminium Track with End caps 25-0

Available in 2400mm, 3600mm,

and 6000mm lengths

Side fix 02005/02008 Brackets:

Pelmet: Side fixed track with End Caps 27-5

Fascia comes in satin anodised aluminium

Finish in lengths of 2400mm, 3600mm, and 6000mm

Hangers: Timber doors 02252 - concealed fixing

02256 - angle plate fixing Timber doors Timber doors 02255 - Apron fixing Metal doors 02251 - angle frame Metal doors 02257 - box frame

Aluminium 02252 - concealed fixing

Timber / Aluminium doors 44347 - concealed fixing **Guides:**

22392 - Floor fixing Timber doors Metal doors 44319 - angle frame 44320 - box frame Metal doors

Aluminium Channel 44-2 Channel:

Suitable for Timber / Metal / Aluminium Doors, 44-2

channel available in 2400mm, 3600mm lengths.

Aluminium Channel 41-2

Suitable for Timber / Aluminium Doors 41-2 channel available in 2400mm, 3600mm lengths.


Track Stop 02718



02005 Bracket

44-320

STRAIGHTAWAY 250

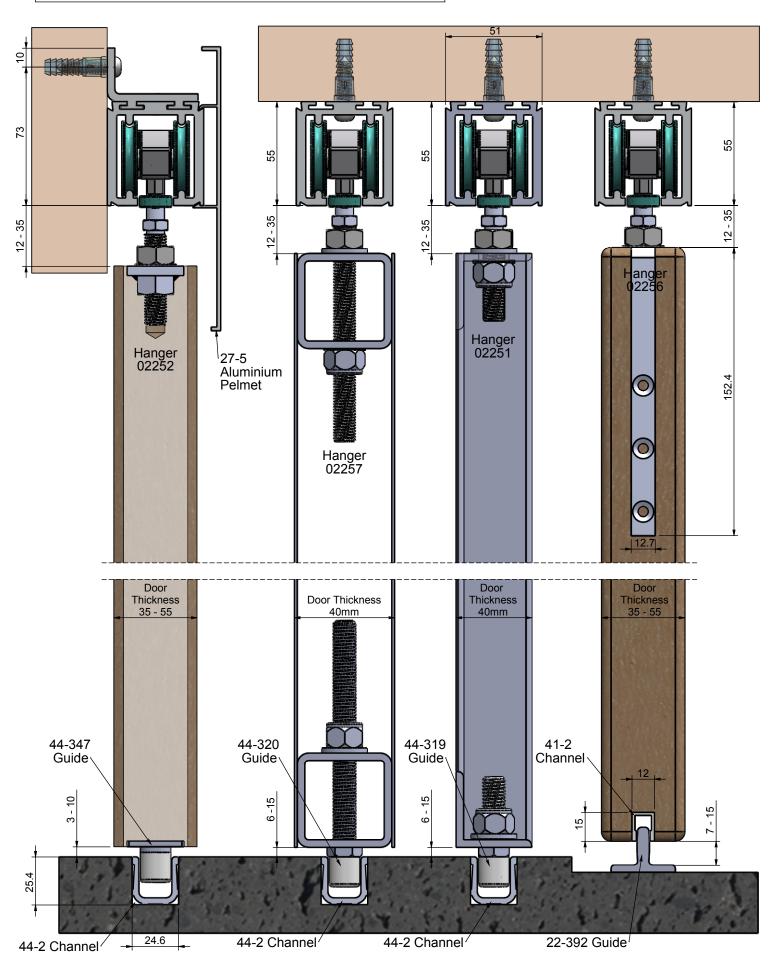



HILLALDAM COBURN LTD, UNIT 16, MERTON INDUSTRIAL PARK, LEE ROAD, LONDON SW19 3HX, UK

PHONE: +44 (0)20 8545 6680 FAX: +44 (0)20 8545 6720

EMAIL: sales@hillaldam.co.uk Website: www.coburn.co.uk