

Soft Mooring Buoy

Soft Mooring Buoys

Available as a through chain buoy Norfloat's range of soft mooring buoys (MB1S and MB2S) offer a tough, long lasting, cost effective solution to most mooring requirements.

The MB1S and MB2S soft mooring buoys have been developed for swinging moorings. The outer PVC skin offers excellent boat friendly protection from the mooring buoy, whilst the buoy's top recess helps prevent shackle damage to the moored craft. The MB1S and MB2S buoys are also suitable for most other mooring situations such as trot and fore and aft, moorings.

Features

UV stabilised **PVC**

These mooring buoys are manufactured from rotationally moulded UV stabilised PVC. The PVC outer surface offers excellent protection against the hull of the boat, especially important in wind over tide situations. The foam filling makes the buoy virtually unsinkable in the event of damage. Its low energy surface reduces marine growth significantly which helps keep maintenance costs to a minimum.

Foam filled

Foam filled using marine grade polyurethane foam with a density of 36kg per cubic meter.

Mooring solutions

We understand that standard off-the-shelf mooring buoys may not always meet your mooring needs therefore we are able to manufacture bespoke items to suit your requirements.

Lettering

For identification and notices to mariners, irremovable personalised lettering can be moulded into the buoy during manufacture.

Connection

Norfloat's soft mooring buoys are available as through chain. The replaceable central steel tube takes up to a 19 mm* chain to pass through its centre.





Buoy	Dia mm	Height mm	Volume ltrs	Air weight kg	Res Buoyancy Itrs	Max Chain kg
MB1S	650	325	106	20	85	56
MB2S	650	625	212	30	182	135

Although every effort is made to provide accurate information, dimensions and weights may vary slightly. Norfloat reserve the right to change specifications without notice.



Marker Buoys

Specifications

Product code

A / NB marker buoys

Material

Rotationally moulded UV stable marine grade PVC

Foam fill

Marine grade polyurethane

Rope eye

Heavy Duty Solid moulded PVC


Colours

Available in various colours including IALA compliant red, green and yellow



Туре	Circle cm	Diameter cm	Buoyancy kg	Foamed	Eye Diameter
NB00*	47	18	1.19	N/A	10
NB0*	72	23	6.59	N/A	10
NB1	89	28	9.01	8.04	20
A1	102	32	14.77	13.88	20
NB2	114	36	21.56	20.59	25
A2	127	40	31.13	29.75	25
NB3	140	44	42.84	40.81	25
A3	152	49	60.34	57.39	25
NB4	165	53	72.06	66.34	25
A4	190	61	113.09	107.38	25
NB5	216	68	154.80	147.88	25
NB6	254	81	250.00	235.00	25
NB7	305	97	454.07	432.07	25

^{*}NB0 and NB00 are supplied with Polypropylene thimble style rope eyes

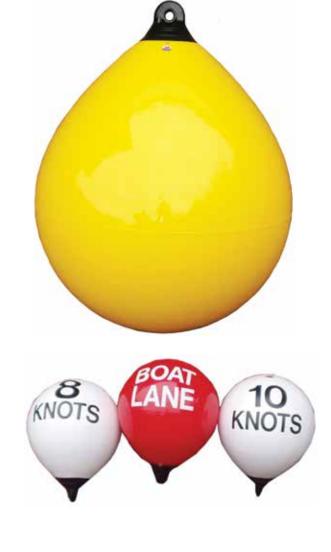

Although every effort is made to provide accurate information, dimensions and weights may vary slightly. Norfloat reserve the right to change specifications without notice.