

Gas & Electric STOVES





Stockton 5 Gas Balanced Flue with log-effect fire

A warm welcome

Nothing creates an inviting atmosphere quite like a Gazco stove. The centrepiece of any home, a Gazco stove adds warmth and character to a room or living space – even if you don't have a chimney! Whether you want to achieve a minimalist, contemporary look, or have your heart set on a more traditional stove, this brochure will help you make the perfect choice, whatever your style or budget.

From the highly efficient contemporary Gas Riva Vision range with all its style and elegance, to the stunning cast iron detail on a more traditional Huntingdon stove, these innovative designs will appeal to any modern or traditional home.



Studio 1 Freestanding with White front, matching plinth and White Stone fuel bed.



There is also a range of highly realistic, electric log-effect stoves featuring Gazco's VeriFlame™ technology. These electric stoves open up new possibilities such as conservatories, kitchens, dining rooms and bedrooms for you to have the warmth and character of a Gazco stove in your home.



Contents

Relax – it's a Gazco stove 4

Flue and Fuel Types 8 - 9

Traditional Styles

Gas and Electric Marlborough 10 - 13

Gas and Electric Stockton 14 - 19

Gas and Electric Huntingdon 20 - 27

Gas and Electric Ashdon 28 - 33

Contemporary Styles

Gas and Electric Steel Manhattan 34 - 37

Gas Riva Vision 38 - 39

Gas Riva Vision Large 40 - 41

Electric Riva Vision 42 - 43

Gas Riva2 F670 Glass 44 - 45

Gas Riva2 F670 Steel 46 - 47

Studio Freestanding Gas 48 - 49

Additional Information 50 - 51

Stove Selector 52 - 53

Technical Information 54 - 66





Relax – it's a Gazco stove

When you choose Gazco, quality and innovative technology are assured. From traditional models to contemporary designs, Gazco is committed to creating the ultimate flame-effect gas and electric stoves.



Our research and development laboratories are amongst the most advanced in the world, ensuring that the very latest innovations are incorporated into our appliances.

Gazco is an ISO9001 accredited company. Our rigorous quality control system ensures that all our appliances comply with British safety standards as well as stringent European regulations. All fires in this brochure are CE marked. This means they have been independently tested to exacting European standards for safety as well as both heating efficiency and emissions.



Warranty

Your Gazco Expert Retailer will provide you with a Two Year Warranty for your new gas or electric stove. The warranty for gas stoves can be extended to a period of five years by registering your stove with Gazco. Please note, these warranties exclude certain consumable parts. Stoves purchased outside of Gazco's Expert Retailer Network will carry a standard 1 Year non-extendable Warranty. Full warranty terms & conditions are available to view at www.gazco.com



Selecting Your Stove

Before you choose your new stove you will need to know what type of chimney (if you have one) or flue you have. Please turn to pages 8 - 9 to identify your chimney or flue type.



Expert Retailer Network

We take great care to ensure that our stoves are designed, tested and manufactured to the highest possible quality and safety standards. We are just as concerned to make certain that they are sold and installed correctly so that you enjoy years of pleasure from your purchase.

Accordingly, you will find our products are only available from experienced, independent retailers who will be happy to show you a selection of models locally in their showrooms, often fully operational. These independent retailers will discuss your individual requirements both technical (such as sizing the heat output to your room and advising on your flue type) and design, and ensure that you select the most appropriate product for your home. These retailers will also be able to advise on, or assist with, the installation process as well as help provide any after-sales support and servicing your appliance may require in the future.

Whilst we encourage our retailers to promote fireplace products and their outlets via the internet, we do not believe suitable levels of customer care and satisfaction can be obtained from purchasing the product only online and we would strongly recommend that you consider this when undertaking your research and making a purchasing decision. Furthermore, please be aware that we do not offer technical support (beyond our statutory responsibilities) to products bought via nationwide online sales, where this support would normally be offered by one of our qualified, independent retailers.

Furthermore, Gazco fires and stoves purchased from within our Expert Retailer Network will have the additional benefit of a greatly extended warranty period, subject to terms and conditions. Full details can be found at www.gazco.com



What's your type?

Before you select your stove, your local Gazco retailer will need to make sure it's suitable for your home. Firstly, you need to know what fuel you will be running. Secondly, you will need to be aware of what type of chimney or flue you have. If you do not have a chimney then don't worry, Gazco have models developed to suit your home too! To assist you in selecting the right stove for your home, a general guide to which models can be installed with the various flue types is given on each page.

Fuel - Gas or Electric?

The majority of our stoves are available in either gas or electric versions. All the electric models run on a standard 13amp plug and have no need for a chimney.

Which Gas type....

All Gazco gas stoves in this brochure can be specified for use with either Natural Gas or LPG. Natural Gas is provided through mains pipelines, whilst LPG is usually supplied to homes in rural areas from a tank in the garden or gas bottles.

Your Home...

The type of chimney or flue you have usually dictates your choice of stove. To help you understand which stoves are suitable for your home, please use the information and pictures shown opposite to identify your chimney. Don't worry, if you don't have a chimney though, you can still find the perfect stove for your home. Once you have identified your chimney(or confirmed you do not have one), take note of the symbol that represents this, as this has been used throughout the brochure to represent the stoves that are suitable for installation in your home.

Conventional Flue

Conventional flue systems are easily recognisable as either a conventional brick or stone chimney, pre-fabricated or pre-cast chimney system. Should your home have none of these at present, it is usually possible to have a pre-fabricated system installed in your home if required.



Brick or Stone Chimney
(Class 1) **1**

The chimney stack rises well above the roofline and is topped by a traditional chimney pot or gas terminal. This type of chimney relies on the natural circulation of heated air to expel the products of combustion up your chimney.



Pre-Fabricated Flues
(Class 1 & 2) **2**

You will see a metal flue cowl on your roof. Some are all metal whilst others may terminate through a short rectangular pot (but without a chimney stack). These flues create the same circulation of heated air as a brick or stone chimney.



Pre-Cast flues
(Class 2) **3**

Many modern homes have been built with such flues. You can readily identify them by either a metal flue cowl or a raised ridge terminal on your roof. Again, the natural circulation of heated air expels the products of combustion. This option is only available on the small stoves.

Balanced Flue

Balanced flues work in conjunction with Gazco's Glass Fronted gas stoves. The appliance is completely sealed from the room into which it is installed (so there are no draughts and heating efficiency is increased) and a twin-wall pipe vents directly to an outside wall.



Balanced Flue
(No chimney required) **BF**



Air for combustion is drawn in through the outer pipe whilst the inner pipe removes the combustion gases to the exterior of the property. Depending on the stove selected, the twin-walled pipe may exit horizontally through an external wall or vertically through the roof. Gazco offers a comprehensive range of balanced flue system components. Please refer to our dedicated Concentric Flue System brochure which can be requested from your retailer or viewed online at www.gazco.com.



Powered Flue
(No chimney required) **PF**

A powered flue uses an extractor unit mounted to vent the combustion gases directly outside. This means that your stove does not have to be installed against an external wall, so it can be located in more rooms around your home. A mains electricity supply is needed to operate this system.



Electric Stoves
(No chimney required) **⚡**

Gazco produce an excellent selection of electric Marlborough, Stockton, Huntingdon 30, Clarendon, Ashdon, Steel Manhattan and Riva Vision stoves which do not, of course, require a chimney or flue of any kind.

No Air Vent required (UK)

All stoves shown with this symbol, boast the advantage of not normally requiring an air vent* where the air permeability is greater than 5.0m³/hr/m². Please discuss this in full with your local Gazco retailer.

*Requirements in the Republic Of Ireland are different.



Gas Marlborough



Small Gas Marlborough balanced flue with log-effect fire



Large Gas Marlborough conventional flue with coal-effect fire

Country or city, traditional or contemporary, the innovative Gas Marlborough has the flexibility to suit your lifestyle and your décor. It is available in three sizes and each has an extensive window area to allow you to enjoy the dancing flames and warm ambience of the coal or log-effect fires to the full.

Operation is simplicity itself too. There's an easy ignition and a manual control to adjust the flame height and heat output. Choose Gazco's Command upgradeable remote control and you can adjust the flames and heat from your armchair. Alternatively, opt for the deluxe Programmable upgradeable remote control to set the stove to switch itself on and off and heat the room to the temperature you select.

See page 5 for additional image.

Colour Choice

Matt Black

Heat Output

S: 1.95 - 3.60kW

M: 2.50 - 5.28kW

L: 3.10 - 7.25kW

Efficiency

Conventional flue 78%

Balanced flue 82%

Fuel Bed

Coals

Logs

Command Controls

Manual

Standard upgradeable

Programmable Thermostatic upgradeable

Chimney Types

1 2 3 BF PF

(please see pages 8-9)

Efficiency figures given are based upon the maximum heat output achieved for these models.

For complete model choices, specifications and additional information please see pages 50-54 and 56.

Electric Marlborough



Featuring the same distinctive styling as the Gas Marlborough, the two electric versions offer you an amazingly realistic log-effect fire at the touch of a button. At its heart is Gazco's unique VeriFlame™ technology which allows you to choose from two heat settings that can both be thermostatically controlled; three flame brightness levels, plus the additional option for a blue flame effect on the high setting so you can match your mood exactly. Furthermore, the beautiful flames can be enjoyed without heat, allowing you to enjoy your fire all year round.

The Electric Marlborough simply plugs into a 13amp socket, so is particularly suited for conservatories, bedrooms or home study, in fact any room without a chimney.

* The thermostat is controlled manually from the stove.

Colour Choice

Matt Black

Efficiency

99.8%

Command Controls

Remote as standard

Heat Output

S: 1.00 - 2.00kW

M: 1.00 - 2.00kW

Fuel Bed

Logs

Chimney Types



No chimney required

Efficiency figures given are based upon the maximum heat output achieved for these models.

For complete model choices, specifications and additional information please see pages 50-51 and 55-56







Gas Stockton



Small Gas Stockton balanced flue with log-effect fire

Using cast iron for the door and heavy gauge steel for the body, Gas Stockton stoves combine simple, understated lines with Gazco's latest living flame technology.

This means you can enjoy an unrivalled coal or log-effect fire together with a heating performance that will keep your room really cosy on those cold winter evenings. In fact, you won't even have to move from your chair if you opt for one of our remote controls!

Colour Choice

Matt Black

Heat Output

S: 1.95 - 3.60kW 

M: 2.50 - 5.28kW 

Efficiency

Conventional flue 78%

Balanced flue 82%

Fuel Bed

Coals

Logs

Command Controls

Manual

Standard upgradeable

Programmable Thermostatic upgradeable

Chimney Types

(please see pages 8-9)

Efficiency figures given are based upon the maximum heat output achieved for these models.

For complete model choices, specifications and additional information please see pages 50-54 and 56



Gas Stockton 5



Gas Stockton 5* conventional flue with coal-effect fire

With authentic multi-fuel stove styling, right down to the hinged door with handle, the Gas Stockton 5 is conveniently sized between the small and medium models featured on the previous page. So you have even more opportunity to suit your needs – and to enjoy all the enchantment of a real coal or log-effect fire.

Please see page 45 for additional image.

Colour Choice

Matt Black

Fuel Bed

Logs

Coals

Heat Output

1.95 - 3.40kW 

Efficiency

Conventional flue 73%

Balanced flue 80%

Command Controls

Manual

Standard upgradeable

Programmable Thermostatic upgradeable

Chimney Types

1 2 BF

(please see pages 8-9)

**Please note this is a viable installation in stone, but not suitable for combustible materials.*

Efficiency figures given are based upon the maximum heat output achieved for these models.

For complete model choices, specifications and additional information please see pages 50-54 and 56

Electric Stockton



Electric Stockton Medium in Matt Black



Electric Stockton Small in Matt Black

Using the same cast iron door and heavy gauge steel body as the Gas Stocktons, the electric version combines the classic looks of a woodburning stove with the ease of Gazco's unique VeriFlame™ technology. This means you can enjoy two heat settings that can both be thermostatically controlled; three flame intensity levels, plus the additional option for a blue flame effect on the high setting to create a remarkably authentic log-effect fire - a superb focal point for any room. Choose from the Stockton Small, Stockton 5 or the Stockton Medium.

Colour Choice

Matt Black

Heat Output

S: 1.00 - 2.00kW 

5: 1.00 - 2.00kW 

M: 1.00 - 2.00kW 

Efficiency

99.8%

Fuel Bed

Logs

Command Controls

Remote as standard

Chimney Types



No chimney required

Efficiency figures given are based upon the maximum heat output achieved for these models.

For complete model choices, specifications and additional information please see pages 50-51 and 55-56





Gas Huntingdon 20



Gas Huntingdon 20 with Tracery Door in Matt Black

The compact Gas Huntingdon 20's proportions make it perfect for British fireplace openings, whilst its highly efficient 2.6kW heat output easily creates a warming atmosphere in standard sized rooms. Producing dancing flames over a realistic log fuel bed, this stove is offered with Standard and Programmable Thermostatic remote controls, providing real fire ambience at the touch of a button.

Presented in either Matt Black, Matt Ivory or Ivory enamel finishes, the Huntingdon 20 lets you choose a colour that best suits your home. Further expanding the styling options available, this elegant stove is also offered in both clear door and tracery versions.

Colour Choice

Matt Black
Matt Ivory
Ivory

Heat Output

1.64 - 2.62kW 

Efficiency

Conventional flue 75%
Balanced flue 82%

Fuel Bed

Logs

Command Controls

Manual
Standard upgradeable
Programmable Thermostatic upgradeable

Chimney Types

(please see pages 8-9)

*Efficiency figures given are based upon the maximum heat output achieved for these models.
For complete model choices, specifications and additional information please see pages 50-54 and 57*



Gas Huntingdon 30



Gas Huntingdon 30 conventional flue with tracery door and coal-effect in Matt Black



Gas Huntingdon 30 with clear door and log-effect in Ivory enamel

The Gas Huntingdon 30 combines refined styling with efficient heating technology. Available in Matt Black, Matt Ivory and Ivory enamel finishes, the beautiful flame picture gives great warmth and style to any interior. The Huntingdon 30 is available with either elegant tracery or as a clear door version for stylistic versatility.

Choose from either realistic coal or log fuel effects, the latter sporting a glowing ember bed for the ultimate real fire ambiance. Both fuel effects are available in conventional flue versions, whilst the log effect is also available in a balanced flue model. The Gas Huntingdon comes with manual control or, for total ease and convenience, upgrade to one of Gazco's command remote controls.

Also see images on page 58, 67 and front cover.

Colour Choice

Matt Black
Matt Ivory
Ivory

Heat Output

1.90 - 3.50kW 

Efficiency

Conventional flue 75%
Balanced flue 81%

Fuel Bed

Logs
Coals

Command Controls

Manual
Standard upgradeable
Programmable Thermostatic upgradeable

Chimney Types

(please see pages 8-9)

Efficiency figures given are based upon the maximum heat output achieved for these models.
For complete model choices, specifications and additional information please see pages 50-54 and 58



Gas Huntingdon 40



Gas Huntingdon 40 with tracery door in Matt Ivory.
Shown with Sandringham Limestone Mantel

The largest model in the Huntingdon range, the Gas Huntingdon 40 is perfectly at home in big open fireplaces or spacious interiors. With a powerful heat output of 5.4kW, it can quickly create a warming atmosphere whilst still maintaining an exceptional efficiency up to 84%, thanks to its cutting edge gas stove technology.

Presented in a three finishes; Matt Black, Matt Ivory and Ivory enamel, the Huntingdon 40 can be chosen with a tracery door for refined style or clear door for an uninterrupted view of the realistic log bed and rolling flames, allowing you to select the styling that fits your décor.

For added convenience, the Huntingdon 40 can be upgraded from manual operation with a choice of optional handsets for remote control as well as programmable thermostatic and timer functionality.

Colour Choice

Matt Black
Matt Ivory
Ivory

Heat Output

2.78 - 5.54kW 

Efficiency

Conventional flue 75%
Balanced flue 84%

Fuel Bed

Logs

Command Controls

Manual
Standard upgradeable
Programmable Thermostatic upgradeable

Chimney Types

(please see pages 8-9)

*Efficiency figures given are based upon the maximum heat output achieved for these models.
For complete model choices, specifications and additional information please see pages 50-54 and 59*

Electric Huntingdon 30



The fine castings and beautiful tracery door of the Huntingdon 30 Electric are brought alive with Gazco's VeriFlame™ technology which provides you with two heat settings that can both be thermostatically controlled; three flame brightness levels, plus the additional option for a blue flame effect on the high setting. Your choice of fire is then set against the highly realistic fuel bed and individually hand painted logs, perfectly mirroring the look and atmosphere of a real woodburning stove.

Operation is simple too as the remote control* not only allows selection of the flame and glow but also fire/heat combinations.

* The thermostat is controlled manually from the stove.

Also see image on page 51.

Colour Choice

Matt Black
Matt Ivory
Ivory

Heat Output

1.00 - 2.00kW 

Efficiency

99.8%

Fuel Bed

Logs

Command Controls

Remote as standard

Chimney Types



No chimney required



Efficiency figures given are based upon the maximum heat output achieved for these models.



Gas Ashdon



Refinement & performance are very much the hallmarks of the Gas Ashdon. Its graceful lines & fine Gothic tracery window combined with the latest gas fire technology provide a superb focal point for your home.

There is a choice of traditional Matt Black, Matt Ivory, lustrous Midnight Blue, Laurel Green or Ivory enamel finishes; coal or log fuel beds; Standard upgradeable & Programmable Thermostatic upgradeable remote controls.

Colour Choice

Matt Black
 Matt Ivory
 Laurel Green
 Midnight Blue
 Ivory

Heat Output

2.50 - 5.28kW

Efficiency

Conventional flue 78%
 Balanced flue 82%

Fuel Bed

Logs
 Coals

Command Controls

Manual
 Standard upgradeable
 Programmable Thermostatic upgradeable

Chimney Types

1 **2** **BF** **PF**

(please see pages 8-9)

Efficiency figures given are based upon the maximum heat output achieved for these models.

For complete model choices, specifications and additional information please see pages 50-54 and 60







Gas Ashdon - Clear Door



Gas Ashdon with clear door in Laurel Green enamel & coal-effect fire

For those who admire the fine lines and heating capacity of the Gas Ashdon, there is the choice of a clear door version. Identical in performance, size and finish options to the Gas Ashdon, the clear door version is for those who crave the fullest possible flame picture without compromise.

Colour Choice

Matt Black
Matt Ivory
Laurel Green
Midnight Blue
Ivory

Heat Output

2.50 - 5.28kW 

Efficiency

Conventional flue 78%
Balanced flue 82%

Fuel Bed

Logs
Coals

Command Controls

Manual
Standard upgradeable
Programmable Thermostatic upgradeable

Chimney Types

(please see pages 8-9)

Efficiency figures given are based upon the maximum heat output achieved for these models.

For complete model choices, specifications and additional information please see pages 50-54 and 60

Electric Ashdon



Gazco's popular electric stove features our unique VeriFlame™ technology. It offers a superbly realistic log-effect fire with three different brightness intensities, the additional option for a blue flame effect on the high setting plus two heat settings that can both be thermostatically controlled. Quite simply, it means that you can enjoy all the ambience of a genuine cast iron wood burner with the convenience of a remote control*.

From the hand painted fuel bed and logs to the lustrous enamel and painted finishes, this stove exudes the style and quality to make an impressive focal point in any home.


* The thermostat is controlled manually from the stove.

Also see image on page 49.

Colour Choice

Matt Black
Matt Ivory
Laurel Green
Midnight Blue
Ivory

Heat Output

1.00 - 2.00kW 

Efficiency

99.8%

Fuel Bed

Logs

Command Controls

Remote as standard

Chimney Types



No chimney required

Efficiency figures given are based upon the maximum heat output achieved for these models.

For complete model choices, specifications and additional information please see pages 50-51, 56 and 60.







Gas Steel Manhattan



The contemporary Steel Manhattan offers you even more opportunities to co-ordinate with today's more modern décors, room sizes and furnishings, especially as there are two sizes and each is available in a choice of two finishes.

Whichever way you look at the Steel Manhattan, as a piece of furniture or as a heating appliance, this precision-engineered gas stove provides an outstanding focal point for any room. The striking steel design is complemented by a matt black cast iron top grille that convects the heat into the room.

Please see further image on page 61.

Finish Choice

Anthracite
Brushed Stainless Steel

Fuel Bed

Logs

Sizes Available

Small
Medium

Heat Output

S: 1.76 - 2.85kW
M: 2.50 - 5.28kW

Efficiency

Conventional flue 78%
Balanced flue 82%

Command Controls

Manual
Standard upgradeable
Programmable Thermostatic upgradeable

Chimney Types

1 **2** **BF** **PF**
(please see pages 8-9)

Efficiency figures given are based upon the maximum heat output achieved for these models.

For complete model choices, specifications and additional information please see pages 44-48 and 54

Electric Steel Manhattan





The small and medium Electric Steel Manhattan stoves provide clean lines and contemporary styling with a highly realistic log-effect fire and up to 2kW of heat output at the press of a button on the remote control.

Both models incorporate Gazco's VeriFlame™ technology offering you three different flame intensities and two heat settings, that can be thermostatically controlled*, and you can even enjoy the flame effect without the heat. There is a choice of two modern finishes to blend with a wide range of interiors.

Colour Choice

Anthracite
Brushed Stainless Steel

Heat Output

S: 1.00 - 2.00kW 
M: 1.00 - 2.00kW 

Efficiency

99.8%

Fuel Bed

Logs

Sizes Available

Small
Medium

Command Controls

Remote as standard

Chimney Types


No chimney required

Efficiency figures given are based upon the maximum heat output achieved for these models.

For complete model choices, specifications and additional information please see pages 50-51, 55 and 61.







Gas Riva Vision



Gas Riva Vision Medium with log effect fuel bed



Gas Riva Vision Small, balanced flue with log effect fuel bed

Offered in four sizes (Riva Vision Large overleaf) which all feature an eye-catching glass-fronted door and integral glass plinth, the high quality Gas Riva Vision is a sparkling addition to the Gazco stoves range. The Small, Midi and Medium models feature our latest highly-realistic log effect fire with glowing ember bed.

The flames on the Riva Vision Medium are enhanced further by the stainless steel lining panels, creating extra illumination in the stove with a mirror-like finish that echoes the Vision's reflective exterior!

To further increase your interior design possibilities, why not also opt for a contemporary stove bench (see page 66) or black gloss flue pipe* - the perfect complement to these stylish contemporary stoves.

Finish

Black Glass

Fuel Bed

Logs

Sizes Available

Small

Midi

Medium

Heat Output

Small: 2.40 - 2.56kW

Midi: 3.26 - 3.44kW

Medium: 2.78 - 5.54kW

Efficiency

Conventional flue 75%

Balanced flue 84%

Command Controls

Manual

Standard upgradeable

Programmable Thermostatic upgradeable

Chimney Types

1 2 BF

(please see pages 8-9)

*Conventional flue only

Efficiency figures given are based upon the maximum heat output achieved for these models.

For complete model choices, specifications and additional information please see pages 50-54 and 63.

For Riva Bench options please see page 66.

Gas Riva Vision Large



The Gas Riva Vision large offers a greater heat output than its Small, Midi & Medium equivalents, providing a comforting warmth for larger rooms. There is a choice of either a realistic log or contemporary white stone fuel effect, with the option to customise your white stone fire with a choice of three glass bead sets. The log-effect models can be styled even further with a choice of either the timeless black reeded or the lighter vermiculite linings. Whichever you choose, these high-efficiency, stunning flame effects are displayed to their full potential in this wide screen format, complemented by the sleek glass styling and ease of use from the Programmable Thermostatic remote control.

For conventional flue versions you can also opt for gloss black flue pipe to continue its reflective qualities and really create that designer look. Consider including a stove bench to further accentuate the contemporary styling (see page 66 for more details).

Finish Choice

Black Glass

Heat Output

4.85 - 5.20kW 

Efficiency

Conventional flue 70%

Balanced flue 81%

Chimney Types

1 **2** **BF**

(please see pages 8-9)

Linings

Vermiculite (Log Effect)

Black Reeded (Log Effect)

Black Enamel (White Stone or Glass Beads)

Fuel Beds (see right)

White Stones

Logs

Red, Clear or Black Glass Beads†

Command Controls

Programmable

Thermostatic Remote



Clear Glass Beads



Red Glass Beads



Black Glass Beads

†Glass Beads are available as an upgrade to White Stone models. Please note that Red Glass beads will darken when burning and then return to their original colour when cool.

Efficiency figures given are based upon the maximum heat output achieved for these models.





Electric Riva Vision



The Riva Vision is a contemporary, electric stove that comes in three sizes: Small, Midi & Medium; each sporting a highly reflective black glass door, integral glass plinth, black glass top plate and stainless steel detailing for a clean stylish look.

Incorporating an eye-catching flame effect created using Gazco's unique VeriFlame™ technology, the Riva Vision's alluring visuals glow over a realistic hand painted log-effect fuel bed to give all the ambiance and depth of a real log fire. To increase your interior design possibilities, you can enhance your Riva Vision by choosing from one of ten stylish Riva Stove Benches as shown on page 66.

**The thermostat is controlled manually from the stove.
Electric Riva Vision Small is shown on page 51*



Finish Choice

Black Glass

Fuel Bed

Logs

Heat Output

Small: 1.00 - 2.00kW

Midi: 1.00 - 2.00kW

Medium: 1.00 - 2.00kW



Efficiency

99.8%

Command Controls

Remote as standard

Chimney Types



No Chimney Required

*Efficiency figures given are based upon the maximum heat output achieved for these models.
For complete model choices, specifications and additional information please see pages 50-51, 55 and 63.*

Riva2 F670 Glass



Riva2 F670 Glass, conventional flue with Brick-effect Lining

Combining exceptional aesthetics with the latest gas fire innovations, the Riva2 F670 Glass effortlessly creates a focal point in any room – whilst providing a high level of heating performance and high efficiency.

The F670's realistic log-effect fire is complimented by a choice of linings including classic Brick Effect, contemporary Vermiculite, elegant Black Reeded, and depth-enhancing, reflective Black Glass, allowing you to customise your stove to your personal tastes.

Riva2 F670 is a freestanding stove for hearth mounted installations, but for optimal versatility, is also offered with the striking Apex stand (shown overleaf) or with Gazco's range of contemporary stove benches.

Finish

Black Glass

Lining Choice

Vermiculite
Brick-effect
Black Reeded
Black Glass

Heat Output

3.20 - 5.60kW 

Fuel Bed

Logs

Efficiency

Conventional flue 75%
Balanced flue 82%

Command Controls

Programmable Thermostatic Remote

Chimney Types

1 **2** **BF**

(please see pages 8-9)

Efficiency figures given are based upon the maximum heat output achieved for these models.

For complete model choices, specifications and additional information please see pages 50-54, 62 and 66.





Riva2 F670 Glass, balanced flue with Black Glass Lining on Riva 120 High Bench

*Riva2 F670 Steel, balanced flue with
Black Reeded Lining*



Riva2 F670 Steel



Offered in a stylish Graphite steel front, the F670 Steel is a style alternative to the Glass model shown on the previous page and therefore shares all the same firebox technology.

The F670 is ideal for corner installations due to its subtly tapered shape. This tapering is also echoed in the specifically designed, geometric Apex stand that elevates the fire for a truly unique designer statement.

These cutting edge gas stoves are capable of producing up to 5.60kW of heat, with an outstanding 82% efficiency, all with the ultimate ease of use thanks to its Programmable Thermostatic handset. Featuring both timer and thermostatic temperature controls, the F670 ensures you always have a warm welcome home.

Finish

Graphite

Lining Choice

Vermiculite
Brick-effect
Black Reeded
Black Glass

Heat Output

3.20 - 5.60kW 

Fuel Bed

Logs

Efficiency

Conventional flue 75%
Balanced flue 82%

Command Controls

Programmable Thermostatic Remote

Chimney Types

1 **2** **BF**

(please see pages 8-9)

Efficiency figures given are based upon the maximum heat output achieved for these models.

For complete model choices, specifications and additional information please see pages 50-54, 62 and 66



Studio 2 Freestanding with White front and matching bench,
log-effect fuel bed and Black Reeded lining

Studio Freestanding Gas



Studio 1 Freestanding with Black front and matching plinth, log-effect fuel bed and Vermiculite lining

The Studio Freestanding fires represent the ultimate in gas fire design, blending geometric angles with sweeping curves to create a striking, contemporary centrepiece in your home.

These high efficiency fires are available with a choice of a smoothly curving bench or plinth, each echoing the distinctive design of the fire and offered in either White or Black front finishes. There is also a range of lining and fuel effect choices to further add to your styling possibilities. The Programmable Thermostatic remote offers complete control and convenience.

See page 3 for White Stone model.

Finish Choices

Black or White Fronted

Mounting Choices

Plinth or Bench

Heat Output

4.85 - 6.97kW

Efficiency

Conventional flue 78%
Balanced flue 81%

Chimney Types

1 **2** **BF**

(please see pages 8-9)

Linings

Vermiculite (Log Effect)
Black Reeded (Log Effect)
Black Enamel (White Stone or Glass Beads)

Fuel Beds (see right)


White Stones
Logs
Red, Clear or Black Glass Beads†

Command Controls

Programmable
Thermostatic Remote



Clear Glass Beads



Clear Glass Beads

Red Glass Beads

Black Glass Beads

†Glass Beads are available as an upgrade to White Stone models. Please note that Red Glass beads will darken when burning and then return to their original colour when cool.

Efficiency figures given are based upon the maximum heat output achieved for these models.

For complete model choices, specifications and additional information please see pages 50-54 and 64.

Additional Information










Impressive features

All Gazco gas stoves have an outstanding list of standard features:

- **Ceramic fibre coals, logs or driftwood** - skilfully sculpted for maximum 'real fire' effect and atmosphere
- **Multi-purpose control knobs**- for simple, fingertip control of ignition, pilot light and gas supply
- **Piezo ignition** - automatic sparking without batteries or electricity
- **Adjustable flame setting** - infinitely adjustable between high and low
- **Convection system** - for improved heating efficiency and safety
- **Flame failure device** - automatically shuts off the gas supply if the pilot light goes out
- **Flue Sure System®** - Gazco's special safety system shuts off the gas supply in the case of accidental flue blockage (conventional flue models only)
- **Choice of flue exit** - top or rear exit options for greater flexibility of installation (except small balanced flue models which are rear exit only)

Colour/finish choices

According to model, the colour/finishes available are shown below:

| | | | |
|---|-------------------|---|-----------------------------|
|  | Matt Black - 2 |  | Ivory - 1 |
|  | Midnight Blue - 1 |  | Matt Ivory - 2 |
|  | Laurel Green - 1 |  | Brushed Stainless Steel - 3 |
|  | Anthracite - 2 |  | Black Glass - 4 |
|  | Graphite - 2 | | |

1 = Enamel finish
2 = Paint finish
3 = Steel finish
4 = Glass finish

Command remote controls

Gas Stoves

Gazco was the first UK company to introduce remote controls for gas fires. Today, our Command remote control systems allow most stoves to be upgraded, either at the time of purchase or at a later date, with either:



a) Standard upgradeable remote control

Once the pilot light has been ignited manually you can vary the flame height and heat output from the comfort of your armchair.



b) Programmable Thermostatic upgradeable remote control

This deluxe version has two additional features. The first allows you to thermostatically control the room temperature whilst the second allows you to programme your stove to switch itself on and off twice a day. Use both and you can even come home to a glowing fire that has heated the room to the temperature you select.



c) Programmable Thermostatic remote control for Gas Riva Vision Large, Riva2 F670 and Studio Freestanding

This deluxe remote is loaded with exciting features that make it possible to programme your stove to perfectly complement your lifestyle. Not only can you ignite, extinguish and thermostatically control your stove, this remote control system benefits from advanced technology that gives you the option to create an automatic, intelligent heating program that means your home is comfortable and cosy at any time of the day or night.

Electric Stoves

Our range of Electric Stoves are as easy to install as plugging in and switching on! They are available in a range of designs from traditional to modern, ensuring that there is an electric stove available to suit all pockets and locations. The heater and VeriFlame™ controls for each fire are discreetly located under the stove and can be operated using the supplied remote*.

The VeriFlame™ technology consists of two heat settings that can both be thermostatically controlled, three flame intensities, plus the additional option of a blue flame effect on the high setting - so you can mix and match to create the perfect ambience. Select from fire effect only, fire effect + 1kW heat and fire effect + 2 kW heat. Every VeriFlame™ setting beautifully highlights the highly realistic hand painted log-effect glass fibre fuel bed.

*The thermostat is controlled manually from the stove.



The Gazco VeriFlame™ Difference

Unique on the market, Gazco's VeriFlame™ technology produces the ultimate in realistic fire effects. The complementary remote control allows you to independently adjust the brightness and colour of the flames and fuel bed so you can produce the exact ambience you require. Complete flexibility at the touch of a button. There are also discreetly concealed manual controls should the batteries in the remote control run out of power.

Technical Specifications

All specifications given in the main part of this brochure are approximate. Actual specifications for each individual product will vary according to the exact model and are given on pages 52-66. Your Gazco retailer will be pleased to help explain specific model specifications and provide any further information you may require, or you can view/download specification sheets from www.gazco.com.

Installation and Safety

Gazco gas stoves must be fitted by a qualified gas installer (Gas Safe registered in the United Kingdom or Bord Gais registered in the Republic of Ireland) who should also verify the proposed site conditions are fully suitable for the product selected. Complete installation instructions for many models can be obtained prior to purchase by downloading them from www.gazco.com.

Please note that all parts of these stoves become extremely hot during operation and can result in serious injury and burns if touched. It is therefore recommended that a fireguard complying with BS 8423:2002 is used in the presence of young children, the elderly or infirm.

Colours

Owing to variations in studio lighting and printing inks, the colours of stoves illustrated in this brochure may differ slightly from actual models.

Product Improvement & Brochure Photography

Gazco pursue a policy of continuous product improvement, therefore, whilst our products are correct at the time of the photography, we reserve the right to make alterations and amendments. Exact product details should be discussed with your retailer at the time of purchase.

All fire and flame photography has been taken from genuine products; however, the exact appearance of the flame picture for any appliance will vary depending on the nature of the flue type, installation surroundings, local geographical features and the way in which the appliance is operated.

Given that building regulations are subject to constant change, some of the photography in this brochure may not comply with the requirements of the latest Building Regulations and you should always check your proposed installation arrangement with your qualified gas installer before proceeding. Certain settings in this brochure are dependant on the use of heat shields to reduce the required separation from combustible material.

Please note: The operation and appearance of gas appliances depends on variable factors such as the gas pressure supplied.

Warranty information

Your Gazco Expert Retailer will provide you with a Two Year Warranty for your new gas or electric stove. The warranty for gas stoves can be extended to a period of five years by registering your stove with Gazco. Please note, these warranties exclude certain consumable parts. Stoves purchased outside of Gazco's Expert Retailer Network will carry a standard 1 Year non-extendable Warranty. Full warranty terms & conditions are available to view at www.gazco.com



Gas Stockton 5 balanced flue with log-effect fire



Electric Riva Vision Small



GAS STOVES - dimensions and options

| Model | Overall dimensions (mm) | | | Approx weight (kg) | Conventional or Pre-fabricated flue |
|--|-------------------------|--------|-------|--------------------|-------------------------------------|
| | Width | Height | Depth | | |
| Gas Marlborough - Matt Black only | | | | | |
| Small | 410 | 533 | 360 | 35 | ✓ |
| Medium | 590 | 583 | 410 | 48 | ✓ |
| Large | 730 | 628 | 420 | 56 | ✓ |

| | | | | | |
|---------------------------------------|-----|-----|-----|----|---|
| Gas Stockton - Matt Black only | | | | | |
| Small | 422 | 525 | 340 | 57 | ✓ |
| Stockton 5 | 481 | 544 | 337 | 55 | ✓ |
| Medium | 579 | 618 | 411 | 77 | ✓ |

| | | | | | |
|---|-----|-----|-----|---------------|---|
| Gas Huntingdon - Matt Black, Matt Ivory and Ivory Enamel | | | | | |
| Gas Huntingdon 20 | 416 | 535 | 320 | 45 | - |
| Gas Huntingdon 30 | 560 | 592 | 351 | 72 | ✓ |
| Gas Huntingdon 40 | 641 | 653 | 382 | CF: 71 BF: 75 | - |

| | | | | | |
|---|-----|-----|-----|----|---|
| Gas Ashdon - Matt Black, Laurel Green, Midnight Blue, Ivory and Matt Ivory | | | | | |
| Medium | 654 | 652 | 515 | 88 | ✓ |
| Medium - clear glass | 654 | 652 | 515 | 86 | ✓ |

| | | | | | |
|---|-----|-----|-----|----|---|
| Gas Steel Manhattan - Anthracite and Brushed Stainless Steel | | | | | |
| Small | 540 | 633 | 360 | 64 | - |
| Medium | 709 | 683 | 425 | 80 | - |

| | | | | | |
|---|-----|-----|-----|---------------|---|
| Gas Riva2 F670 - Black Glass and Steel | | | | | |
| Riva2 F670 | 737 | 572 | 385 | CF: 52 BF: 54 | - |

| | | | | | |
|--------------------------------------|-----|-----|-----|------|---|
| Gas Riva Vision - Black Glass | | | | | |
| Small - Conventional Flue | 370 | 529 | 289 | 33 | - |
| Small - Balanced Flue | 370 | 529 | 289 | 35 | - |
| Midi - Conventional Flue | 415 | 605 | 311 | 39 | - |
| Midi - Balanced Flue | 415 | 605 | 311 | 41 | - |
| Medium - Conventional Flue | 535 | 677 | 353 | 45 | - |
| Medium - Balanced Flue | 535 | 677 | 353 | 55 | - |
| Large - Conventional Flue | 876 | 631 | 390 | 74.5 | - |
| Large - Balanced Flue | 876 | 656 | 375 | 78.5 | - |

| | | | | | |
|--|-----|------|-----|-------|---|
| Gas Studio Freestanding - Black and White | | | | | |
| Studio Freestanding 1 - Bench Mounted | 896 | 1150 | 396 | 146 | - |
| Studio Freestanding 1 - Plinth Mounted | 649 | 1105 | 485 | 141.5 | - |
| Studio Freestanding 2 - Bench Mounted | 896 | 1350 | 396 | 148 | - |
| Studio Freestanding 2 - Plinth Mounted | 649 | 1305 | 485 | 143.5 | - |

Important Notes:

1. Conventional Flue Pipe and options:
for flue pipe codes and options such as flue collars, closure plates and spigot extensions, please see price list.

2. Balanced Flue:
in addition, please order appropriate flue kit and optional flue collar. Please see price list for details.

3. Powered Flue:
please order powered flue kit and, if terminal is to be less than 2m above ground level, a terminal guard is also required.

4. *: indicates product is available with rear flue exit only.
†: indicates product is available with top flue exit only.

5. All other products are top or rear.

| Coal fire | | Log fire | | White Stones | |
|---------------|--------------|--------------------------------|---------------|--------------------------------|---------------|
| Pre-cast flue | Powered flue | Conventional or Pre-fabricated | Balanced flue | Conventional or Pre-fabricated | Balanced flue |
| ✓ | ✓ | - | ✓* | - | - |
| - | ✓ | ✓ | ✓ | - | - |
| - | ✓ | - | - | - | - |
| ✓ | ✓ | - | ✓* | - | - |
| - | - | - | ✓ | - | - |
| - | ✓ | ✓ | ✓ | - | - |
| - | - | ✓ | ✓* | - | - |
| - | - | ✓ | ✓ | - | - |
| - | - | ✓ | ✓ | - | - |
| - | ✓ | ✓ | ✓ | - | - |
| - | ✓ | ✓ | ✓ | - | - |
| - | - | - | ✓* | - | - |
| - | - | ✓ | ✓ | - | - |
| - | - | ✓ | ✓ | - | - |
| - | - | ✓ | ✓ | - | - |
| - | - | ✓ | ✓ | - | - |
| - | - | ✓ | ✓* | - | - |
| - | - | ✓ | ✓ | - | - |
| - | - | ✓ | ✓ | - | - |
| - | - | ✓ | ✓ | - | - |
| - | - | ✓ | ✓ | - | - |
| - | - | ✓† | - | ✓† | - |
| - | - | - | ✓† | - | ✓† |
| - | - | ✓† | ✓† | ✓† | ✓† |
| - | - | ✓† | ✓† | ✓† | ✓† |
| - | - | ✓† | ✓† | ✓† | ✓† |
| - | - | ✓† | ✓† | ✓† | ✓† |

GAS FLUE SYSTEMS

1. Closure Plate and Spigot Extension^Δ


This is a flue system suitable for homes with existing conventional chimneys in which an airtight, steel closure plate is fitted over a fireplace opening or Class 2 pre-cast starter block and a short piece of flue extends from the back of the stove, through the plate, into the chimney. The products of combustion are carried up the chimney by natural convection.

Models which can be fitted with a closure plate and spigot extension are:

Small Gas Marlborough, Small Gas Stockton, Medium Gas Marlborough and Medium Gas Stockton.

Models which can be fitted to a pre-cast chimney with a closure plate are:

Small Gas Marlborough and Small Gas Stockton




2. Rigid or Flexible Metal Flue^Δ

With this flue system rigid metal tubes, or a combination of rigid and flexible metal tubes, extend vertically directly from the stove to the outside of the property. This may be either straight through the ceiling or roof with the flue pipe exposed, or by using the channel of a chimney or a studwork enclosure. The products of combustion are carried up the flue by natural convection.

Models which can use this system are:

Small, Medium and Large Gas Marlborough, Small and Medium Gas Stockton, Gas Stockton 5, Huntingdon 20, Huntingdon 30, Huntingdon 40, Gas Ashdon and clear glass, Small and Medium Steel Manhattan, Gas Riva Vision Small, Midi, Medium & Large[†], Studio 1 and 2 Freestanding and Riva2 F670. ([†] Top outlet only)

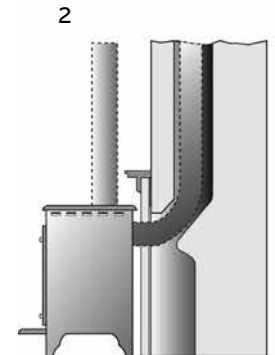

3. Balanced Flue

Where a room has no chimney, then a Balanced Flue version of a Gazco stove is a practical option. The flue consists of one tube inside another. The outer tube brings air into the stove for combustion whilst the inner one emits the products of combustion.

Options: A - Rear outlet (max 600mm wall thickness).

B - Top outlet/up and out (min rise 500mm, max 3m), horizontal (min 250mm, max 5m).

An additional bend can be incorporated in to the horizontal section of the 'up and out', dependent upon a 1m min vertical rise.


C - Top outlet/vertical (min 3m, max 10m).

D - Top outlet/vertical with offset (min to first bend 500mm, max flue length 10m).

Ask your retailer for full technical details or see our Concentric Flue System brochure at www.gazco.com.

Models which can use this system are:

Small* and Medium Gas Marlborough, Small* and Medium Gas Stockton, Gas Stockton 5, Gas Huntingdon 20*, 30 and 40, Gas Ashdon and clear glass, Small*, Medium Steel Manhattan, Gas Riva Vision Small, Midi, Medium & Large[†]. Studio 1 and 2 Freestanding and Riva2 F670. (*Rear outlet only [†] Top outlet only). All Balanced Flue models are log effect only.

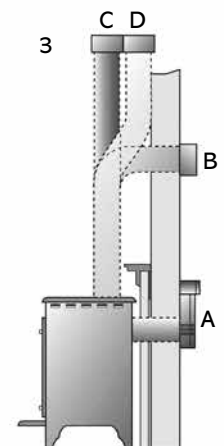

4. Powered Flue


Where a room has no chimney then a Powered Flue is the answer. It is a special extractor unit which attaches to an outside wall and removes the products of combustion, along a rigid metal pipe by fan action. Generally the flue pipe can be of longer lengths than with a Balanced Flue and can also include a number of 90° bends.

Models which can use this system are:

Small, Medium and Large Gas Marlborough, Small and Medium Gas Stockton, Gas Ashdon and clear glass, and Medium Steel Manhattan.

Use Powered Flue with coal effect only.

^Δ Due to the high efficiency and the limited flue flow of the closed convector stoves, a 5" (125mm) flexible flue liner is required when installing the stoves into a brick chimney or a larger than 5" (125mm) diameter lined flue. The only exception to this is stoves that are listed as suitable for installation with a Gazco closure plate and spigot over a standard 22" x 16" fire opening.

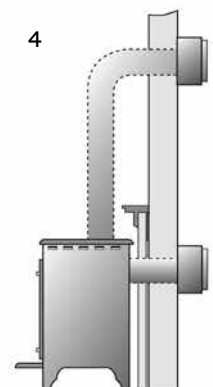

ELECTRIC STOVES - dimensions and options

| Model | Overall dimensions (mm) | | | Approx weight (kg) | Log Fire Electric No flue req. |
|--|-------------------------|-----|-----|--------------------|--------------------------------------|
| | W | H | D | | |
| Electric Marlborough - Matt Black only | | | | | |
| Small | 410 | 559 | 360 | 35 | ✓ |
| Medium | 590 | 583 | 410 | 48 | ✓ |
| Electric Stockton - Matt Black only | | | | | |
| Small | 422 | 525 | 340 | 57 | ✓ |
| Stockton 5 | 481 | 544 | 337 | 55 | ✓ |
| Medium | 579 | 618 | 411 | 82 | ✓ |
| Electric Huntingdon 30 - Matt Black | | | | | |
| | 560 | 592 | 351 | 71.5 | ✓ |
| Electric Ashdon - Matt Black, Laurel Green, Midnight Blue, Ivory and Matt Ivory | | | | | |
| | 654 | 652 | 515 | 78 | ✓ |
| Electric Steel Manhattan - Anthracite and Brushed Stainless Steel | | | | | |
| Small | 540 | 635 | 360 | 33 | ✓ |
| Medium | 711 | 700 | 427 | 44 | ✓ |
| Electric Riva Vision - Black Glass | | | | | |
| Small | 370 | 555 | 297 | 24 | ✓ |
| Midi | 415 | 604 | 317 | 28 | ✓ |
| Medium | 535 | 676 | 363 | 38 | ✓ |



Electric Ashdon in Matt Black


Gas and Electric Marlborough

| Product Code | Model | Colour | Flue Type | Logs/ Coals | Fuel Type | Heat Input | Heat Output | Efficiency |
|--------------|--------|------------|--------------|-------------|-----------|------------|-------------|------------|
| ⊗ 8560 | Small | Matt Black | Conventional | Coals | Nat.Gas | 4.55kW | 3.55kW | 78% |
| ⊗ 8536 | Small | Matt Black | Balanced | Logs | Nat.Gas | 3.65kW | 2.85kW | 78% |
| ⊗ 8564 | Medium | Matt Black | Conventional | Coals | Nat.Gas | 6.60kW | 5.15kW | 78% |
| ⊗ 8610LUC | Medium | Matt Black | Conventional | Logs | Nat.Gas | 6.60kW | 5.28kW | 80% |
| ⊗ 8535LUC | Medium | Matt Black | Balanced | Logs | Nat.Gas | 6.40kW | 5.25kW | 82% |
| 8568 | Large | Matt Black | Conventional | Coals | Nat.Gas | 8.90kW | 6.95kW | 78% |
| ⊗ P8560 | Small | Matt Black | Conventional | Coals | LPG | 4.60kW | 3.60kW | 78% |
| ⊗ P8536 | Small | Matt Black | Balanced | Logs | LPG | 3.65kW | 2.85kW | 78% |
| ⊗ P8564 | Medium | Matt Black | Conventional | Coals | LPG | 6.30kW | 4.90kW | 78% |
| ⊗ P8610LUC | Medium | Matt Black | Conventional | Logs | LPG | 6.40kW | 5.25kW | 82% |
| ⊗ P8535LUC | Medium | Matt Black | Balanced | Logs | LPG | 6.15kW | 5.04kW | 82% |
| P8568 | Large | Matt Black | Conventional | Coals | LPG | 9.30kW | 7.25kW | 78% |
| ⊗ E8560 | Small | Matt Black | N/A | Logs | Elec | – | 2.00kW | 99% |
| ⊗ E8610 | Medium | Matt Black | N/A | Logs | Elec | – | 2.00kW | 99% |

Marlborough Dimensions (see letters on diagram)

| | A | | B | | C | | D | | E | | F | |
|--------|--------------------------------|-----|--------------------------------|------------------|--------------------------------|-----|--------------------------------|-----|--------------------------------|-----|-------------------------------|-----|
| | ins | mm | ins | mm | ins | mm | ins | mm | ins | mm | ins | mm |
| Small | 16 ³ / ₈ | 410 | 21 [*] | 533 [*] | 14 ¹ / ₈ | 360 | 11 | 280 | 13 ³ / ₈ | 352 | 4 ³ / ₈ | 111 |
| Medium | 23 ³ / ₄ | 590 | 23 | 583 | 16 ¹ / ₈ | 410 | 13 | 330 | 15 ³ / ₄ | 401 | 4 | 101 |
| Large | 28 ³ / ₄ | 730 | 24 ³ / ₄ | 628 | 16 ¹ / ₂ | 420 | 13 ³ / ₈ | 340 | 17 ¹ / ₂ | 446 | 4 | 101 |

* Small Electric Marlborough is 1" (25mm) higher.

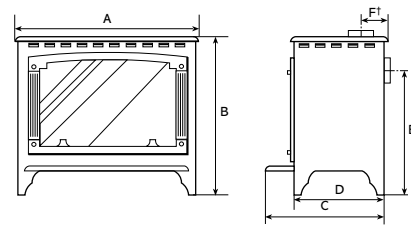

† (Balanced flue version 5¹/₄" 134mm).

* (Small balanced flue version 14¹/₂" 370mm).

* (Medium balanced flue version 17³/₈" 453mm).

Recommended clearances between stove and other surfaces: top 9" (225mm), sides 6" (150mm), rear must be a minimum of 2" (50mm).

The Marlborough has a choice of top or rear flue exit and can be supplied with an optional rear closure plate: Small (8108), Medium (8109) and spigot extension (8111). Small balanced flue stoves are rear exit only.

Stove Flue Pipe

Balanced flue versions of the Gas Marlborough must only use the 6" stainless steel flue provided. For additional Matt Black flue collars, please see the Gazco Stoves price list. Gazco recommends the use of 5" matt black enamelled stove pipe with the conventional flue version Marlborough stove. The components usually required are:

| Description | Product Code |
|--|--------------|
| 1' Straight pipe | 4500 |
| 2' Straight pipe | 4501 |
| 3' Straight pipe | 4502 |
| 90° long 'elbow' adaptor (9" projection) | 4514 |
| Flue collar | 8549 |

Remote Controls for Gas Marlborough

| Description | Product Code |
|--|--------------|
| Standard Upgradeable Remote Control | 8455 |
| Programmable Thermostatic Upgradeable Remote Control | 8456 |


Gas and Electric Stockton

| Product Code | Model | Colour | Flue Type | Logs/ Coals | Fuel Type | Heat Input | Heat Output | Efficiency |
|--------------|--------|------------|--------------|-------------|-----------|------------|-------------|------------|
| ⊗ 8573 | Small | Matt Black | Conventional | Coals | Nat Gas | 4.55kW | 3.55kW | 78% |
| ⊗ 8540 | Small | Matt Black | Balanced | Logs | Nat Gas | 3.65kW | 2.85kW | 78% |
| ⊗ 8574 | Medium | Matt Black | Conventional | Coals | Nat Gas | 6.60kW | 5.15kW | 78% |
| ⊗ 8575MCUC | 5 | Matt Black | Conventional | Coals | Nat Gas | 4.60kW | 3.36kW | 73% |
| ⊗ 8563LUC | 5 | Matt Black | Balanced | Logs | Nat Gas | 4.25kW | 3.40kW | 80% |
| ⊗ 8617LUC | Medium | Matt Black | Conventional | Logs | Nat Gas | 6.60kW | 5.28kW | 80% |
| ⊗ 8570LUC | Medium | Matt Black | Balanced | Logs | Nat Gas | 6.40kW | 5.25kW | 82% |
| ⊗ P8573 | Small | Matt Black | Conventional | Coals | LPG | 4.60kW | 3.60kW | 78% |
| ⊗ P8540 | Small | Matt Black | Balanced | Logs | LPG | 3.65kW | 2.85kW | 78% |
| ⊗ P8574 | Medium | Matt Black | Conventional | Coals | LPG | 6.30kW | 4.90kW | 78% |
| ⊗ P8617LUC | Medium | Matt Black | Conventional | Logs | LPG | 6.40kW | 5.25kW | 82% |
| ⊗ P8570LUC | Medium | Matt Black | Balanced | Logs | LPG | 6.15kW | 5.04kW | 82% |
| ⊗ P8575MCUC | 5 | Matt Black | Conventional | Coals | LPG | 4.40kW | 3.21kW | 73% |
| ⊗ P8563LUC | 5 | Matt Black | Balanced | Logs | LPG | 4.10kW | 3.28kW | 80% |
| ⊗ E8573 | Small | Matt Black | N/A | Logs | Elec | – | 2.00kW | 99% |
| ⊗ E8575 | 5 | Matt Black | N/A | Logs | Elec | – | 2.00kW | 99% |
| ⊗ E8617 | Medium | Matt Black | N/A | Logs | Elec | – | 2.00kW | 99% |

Stockton Dimensions (see letters on diagram)

| | A | | B | | C | | D* | | E† | | F | |
|--------|--------------------------------|-----|---------------------------------|-----|--------------------------------|-----|--------------------------------|-----|-------------------------------|-----|-------------------------------|----|
| | ins | mm | ins | mm | ins | mm | ins | mm | ins | mm | ins | mm |
| Small | 16 ³ / ₈ | 422 | 20 ³ / ₈ | 525 | 11 ¹ / ₂ | 290 | 13 ³ / ₈ | 346 | 4 ³ / ₈ | 110 | 2 | 50 |
| Medium | 22 ³ / ₄ | 579 | 24 ³ / ₁₆ | 618 | 13 ³ / ₈ | 345 | 16 ³ / ₈ | 425 | 4 | 102 | 2 ³ / ₈ | 66 |
| 5 | 19 | 481 | 21 ¹ / ₂ | 544 | 10 ³ / ₄ | 273 | 15 | 380 | 3 ³ / ₈ | 92 | 2 ¹ / ₂ | 64 |

The above information is to assist in your choice of a suitable Gazco stove. This is not intended to be all the information required to install your stove. This can be obtained from your local Gazco retailer or you can download the full installation instructions from the Gazco website at www.gazco.com

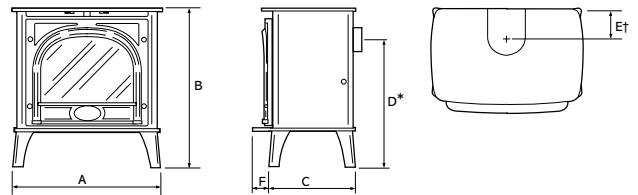

† (Balanced flue version 5¹/₂" 140mm).

* (Small balanced flue version 14¹/₂" 366mm)

* (Medium balanced flue version 19" 482mm)

* (Stockton 5 balanced flue 15¹/₂" 401mm)

Recommended clearances between stove and other surfaces: top 9" (225mm), sides 6" (150mm), rear must be a minimum of 2" (50mm).

The Stockton has a choice of top or rear flue exit. Small and medium models can be supplied with an optional rear closure plates: Small (8042), Medium (8105) and spigot extension (8111). Small balanced flue stoves are rear exit only.

Stove Flue Pipe

Balanced flue versions of the Gas Stockton must only use the 6" stainless steel flue provided. For additional Matt Black, Midnight Blue, Laurel Green and Ivory enamelled flue collars, please see the Gazco Stoves price list. Gazco recommends the use of 5" Matt Black enamelled stove pipe with the conventional flue version. The components required are:

| Description | Product Code |
|--|--------------|
| 1' Straight pipe | 4500 |
| 2' Straight pipe | 4501 |
| 3' Straight pipe | 4502 |
| 90° Long 'elbow' adaptor (9" projection) | 4514 |
| Flue collar | 8549 |

Remote Controls for Gas Stockton

| Description | Product Code |
|--|--------------|
| Standard Upgradeable Remote Control | 8455 |
| Programmable Thermostatic Upgradeable Remote Control | 8456 |

Gas Huntingdon 20

Gas Huntingdon 20 Tracery Door

| Product Code | Colour | Flue Type | Fuel Effect | Fuel Type | Heat Input | Heat Output | Efficiency |
|--------------|------------|--------------|-------------|-----------|------------|-------------|------------|
| ⊗ 515-035 | Matt Black | Conventional | Logs | Nat Gas | 3.30 | 2.48 | 75% |
| ⊗ 515-405 | Matt Black | Conventional | Logs | LPG | 3.20 | 2.40 | 75% |
| ⊗ 515-044 | Ivory | Conventional | Logs | Nat Gas | 3.30 | 2.48 | 75% |
| ⊗ 515-423 | Ivory | Conventional | Logs | LPG | 3.20 | 2.40 | 75% |
| ⊗ 515-053 | Matt Ivory | Conventional | Logs | Nat Gas | 3.30 | 2.48 | 75% |
| ⊗ 515-432 | Matt Ivory | Conventional | Logs | LPG | 3.20 | 2.40 | 75% |
| ⊗ 515-098 | Matt Black | Balanced | Logs | Nat Gas | 3.20 | 2.62 | 82% |
| ⊗ 515-502 | Matt Black | Balanced | Logs | LPG | 3.10 | 2.54 | 82% |
| ⊗ 515-107 | Ivory | Balanced | Logs | Nat Gas | 3.20 | 2.62 | 82% |
| ⊗ 515-511 | Ivory | Balanced | Logs | LPG | 3.10 | 2.54 | 82% |
| ⊗ 515-116 | Matt Ivory | Balanced | Logs | Nat Gas | 3.20 | 2.62 | 82% |
| ⊗ 515-520 | Matt Ivory | Balanced | Logs | LPG | 3.10 | 2.54 | 82% |

Gas Huntingdon 20 Clear Door

| | | | | | | | |
|-----------|------------|--------------|------|---------|------|------|-----|
| ⊗ 515-071 | Matt Black | Conventional | Logs | Nat Gas | 3.30 | 2.48 | 75% |
| ⊗ 515-441 | Matt Black | Conventional | Logs | LPG | 3.20 | 2.40 | 75% |
| ⊗ 515-080 | Ivory | Conventional | Logs | Nat Gas | 3.30 | 2.48 | 75% |
| ⊗ 515-468 | Ivory | Conventional | Logs | LPG | 3.20 | 2.40 | 75% |
| ⊗ 515-089 | Matt Ivory | Conventional | Logs | Nat Gas | 3.30 | 2.48 | 75% |
| ⊗ 515-477 | Matt Ivory | Conventional | Logs | LPG | 3.20 | 2.40 | 75% |
| ⊗ 515-125 | Matt Black | Balanced | Logs | Nat Gas | 3.20 | 2.62 | 82% |
| ⊗ 515-529 | Matt Black | Balanced | Logs | LPG | 3.10 | 2.54 | 82% |
| ⊗ 515-134 | Ivory | Balanced | Logs | Nat Gas | 3.20 | 2.62 | 82% |
| ⊗ 515-545 | Ivory | Balanced | Logs | LPG | 3.10 | 2.54 | 82% |
| ⊗ 515-143 | Matt Ivory | Balanced | Logs | Nat Gas | 3.20 | 2.62 | 82% |
| ⊗ 515-556 | Matt Ivory | Balanced | Logs | LPG | 3.10 | 2.54 | 82% |


Stove Flue Pipe

Balanced flue versions of the Gas Huntingdon 20 must only use the 6" stainless steel flue provided. For additional Matt Black, Matt Ivory and Ivory enamelled flue collars, please see the Gazco Stoves price list. Gazco recommends the use of 5" Matt Black enamelled stove pipe with the conventional flue version. The components required are:

| Description | Product Code |
|---|--------------|
| 1' Straight pipe, Matt Black | 4500 |
| 2' Straight pipe, Matt Black | 4501 |
| 3' Straight pipe, Matt Black | 4502 |
| 90° long 'elbow' adaptor (9" projection), Matt Black | 4514 |
| 1' Straight pipe, Ivory | 4500IV |
| 2' Straight pipe, Ivory | 4501IV |
| 3' Straight pipe, Ivory | 4502IV |
| 1' Straight pipe, Matt Ivory | 4500PI |
| 2' Straight pipe, Matt Ivory | 4501PI |
| 3' Straight pipe, Matt Ivory | 4502PI |
| Matt Black Flue collar, Conventional Flue, Huntingdon | 999-010 |
| Matt Ivory Flue collar, Conventional Flue, Huntingdon | 999-266 |
| Ivory Enamel Flue collar, Conventional Flue, Huntingdon | 999-456 |

Remote Controls for Gas Huntingdon 20

| Description | Product Code |
|--|--------------|
| Standard Upgradeable Remote Control | 8455 |
| Programmable Thermostatic Upgradeable Remote Control | 8456 |

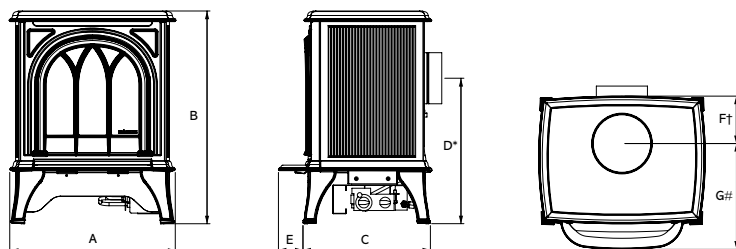

Huntingdon 20 Dimensions (see letters on diagram)

| | A | | B | | C | | D* | | E | | F# | | G# | |
|----------|--------|-----|-----|-----|--------|-----|--------|-----|-------|----|-------|-----|--------|-----|
| | ins | mm | ins | mm | ins | mm | ins | mm | ins | mm | ins | mm | ins | mm |
| 20 (CF) | 16 3/8 | 416 | 21 | 535 | 12 1/2 | 320 | 14 1/2 | 366 | 2 1/2 | 62 | 4 3/4 | 119 | 10 1/2 | 266 |
| 20 (BF)* | 16 3/8 | 416 | 21 | 535 | 12 1/2 | 320 | 15 1/4 | 386 | 2 1/2 | 62 | 6 1/4 | 160 | 8 1/2 | 225 |

*Huntingdon 20 Balanced Flue is Rear Exit only.

Recommended clearances between stove and other surfaces:

top 9" (225mm), sides 6" (150mm), rear must be a minimum of 2" (50mm).

The Huntingdon 20 conventional flue has a choice of top or rear flue exit.


Gas and Electric Huntingdon 30

Gas and Electric Huntingdon 30 Tracery Door

| Product Code | Colour | Flue Type | Fuel Effect | Fuel Type | Heat Input | Heat Output | Efficiency |
|-----------------|------------|--------------|-------------|-----------|------------|-------------|------------|
| ⊗ 515-004 | Matt Black | Conventional | Logs | Nat Gas | 4.55kW | 3.40kW | 75% |
| ⊗ 515-413 | Matt Black | Conventional | Logs | LPG | 4.55kW | 3.40kW | 75% |
| ⊗ 515-154 | Ivory | Conventional | Logs | Nat Gas | 4.55kW | 3.40kW | 75% |
| ⊗ 515-484 | Ivory | Conventional | Logs | LPG | 4.55kW | 3.40kW | 75% |
| ⊗ 515-212 | Matt Ivory | Conventional | Logs | Nat Gas | 4.55kW | 3.40kW | 75% |
| ⊗ 515-536 | Matt Ivory | Conventional | Logs | LPG | 4.55kW | 3.40kW | 75% |
| ⊗ 8503CFMCUC | Matt Black | Conventional | Coals | Nat Gas | 4.60kW | 3.50kW | 76% |
| ⊗ P8503CFMCUC | Matt Black | Conventional | Coals | LPG | 4.40kW | 3.35kW | 76% |
| ⊗ 8503CFMCUCIV | Ivory | Conventional | Coals | Nat Gas | 4.60kW | 3.50kW | 76% |
| ⊗ P8503CFMCUCIV | Ivory | Conventional | Coals | LPG | 4.40kW | 3.35kW | 76% |
| ⊗ 515-013 | Matt Ivory | Conventional | Coals | Nat Gas | 4.60kW | 3.50kW | 76% |
| ⊗ 515-494 | Matt Ivory | Conventional | Coals | LPG | 4.40kW | 3.35kW | 76% |
| ⊗ 515-257 | Matt Black | Balanced | Logs | Nat Gas | 4.30kW | 3.50kW | 81% |
| ⊗ 515-561 | Matt Black | Balanced | Logs | LPG | 4.30kW | 3.50kW | 81% |
| ⊗ 515-395 | Ivory | Balanced | Logs | Nat Gas | 4.30kW | 3.50kW | 81% |
| ⊗ 515-664 | Ivory | Balanced | Logs | LPG | 4.30kW | 3.50kW | 81% |
| ⊗ 515-333 | Matt Ivory | Balanced | Logs | Nat Gas | 4.30kW | 3.50kW | 81% |
| ⊗ 515-712 | Matt Ivory | Balanced | Logs | LPG | 4.30kW | 3.50kW | 81% |
| ⊗ E8503 | Matt Black | N/A | Logs | Elec | - | 2.00kW | 99% |
| ⊗ E8503IV | Ivory | N/A | Logs | Elec | - | 2.00kW | 99% |
| ⊗ 615-567 | Matt Ivory | N/A | Logs | Elec | - | 2.00kW | 99% |

Gas Huntingdon 30 Clear Door

| | | | | | | | |
|-----------|------------|--------------|-------|---------|--------|--------|-----|
| ⊗ 515-009 | Matt Black | Conventional | Logs | Nat Gas | 4.55kW | 3.40kW | 75% |
| ⊗ 515-453 | Matt Black | Conventional | Logs | LPG | 4.55kW | 3.40kW | 75% |
| ⊗ 515-061 | Ivory | Conventional | Logs | Nat Gas | 4.55kW | 3.40kW | 75% |
| ⊗ 515-505 | Ivory | Conventional | Logs | LPG | 4.55kW | 3.40kW | 75% |
| ⊗ 515-100 | Matt Ivory | Conventional | Logs | Nat Gas | 4.55kW | 3.40kW | 75% |
| ⊗ 515-570 | Matt Ivory | Conventional | Logs | LPG | 4.55kW | 3.40kW | 75% |
| ⊗ 515-282 | Matt Black | Conventional | Coals | Nat Gas | 4.60kW | 3.50kW | 76% |
| ⊗ 515-778 | Matt Black | Conventional | Coals | LPG | 4.40kW | 3.35kW | 76% |
| ⊗ 515-348 | Ivory | Conventional | Coals | Nat Gas | 4.60kW | 3.50kW | 76% |
| ⊗ 515-796 | Ivory | Conventional | Coals | LPG | 4.40kW | 3.35kW | 76% |
| ⊗ 515-299 | Matt Ivory | Conventional | Coals | Nat Gas | 4.60kW | 3.50kW | 76% |
| ⊗ 515-698 | Matt Ivory | Conventional | Coals | LPG | 4.40kW | 3.35kW | 76% |
| ⊗ 515-139 | Matt Black | Balanced | Logs | Nat Gas | 4.30kW | 3.50kW | 81% |
| ⊗ 515-726 | Matt Black | Balanced | Logs | LPG | 4.30kW | 3.50kW | 81% |
| ⊗ 515-165 | Ivory | Balanced | Logs | Nat Gas | 4.30kW | 3.50kW | 81% |
| ⊗ 515-739 | Ivory | Balanced | Logs | LPG | 4.30kW | 3.50kW | 81% |
| ⊗ 515-191 | Matt Ivory | Balanced | Logs | Nat Gas | 4.30kW | 3.50kW | 81% |
| ⊗ 515-765 | Matt Ivory | Balanced | Logs | LPG | 4.30kW | 3.50kW | 81% |

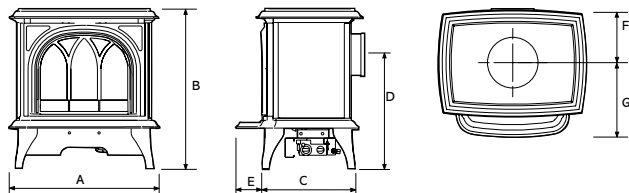

Huntingdon 30 Dimensions (see letters on diagram)

| | A | | B | | C | | D* | | E | | F† | | G | |
|---------|-----|-----|--------------------------------|-----|--------------------------------|-----|--------------------------------|-----|-------------------------------|----|-------------------------------|-----|--------------------------------|-----|
| | ins | mm | ins | mm | ins | mm | ins | mm | ins | mm | ins | mm | ins | mm |
| 30 (CF) | 22 | 560 | 23 ¹ / ₄ | 592 | 13 ⁷ / ₈ | 351 | 15 ³ / ₄ | 403 | 3 ⁵ / ₈ | 96 | 6 ⁷ / ₈ | 174 | 18 ⁵ / ₈ | 475 |
| 30 (BF) | 22 | 560 | 23 ¹ / ₄ | 592 | 13 ⁷ / ₈ | 351 | 16 ⁵ / ₈ | 422 | 3 ⁵ / ₈ | 96 | 7 ⁵ / ₈ | 195 | 18 ⁵ / ₈ | 475 |

Stove Flue Pipe

Balanced flue versions of the Gas Huntingdon 30 must only use the 6" stainless steel flue provided. For additional Matt Black, Matt Ivory and Ivory enamelled flue collars, please see the Gazco Stoves price list. Gazco recommends the use of 5" Matt Black enamelled stove pipe with the conventional flue version. The components required are:

| Description | Product Code |
|---|--------------|
| 1' Straight pipe, Matt Black | 4500 |
| 2' Straight pipe, Matt Black | 4501 |
| 3' Straight pipe, Matt Black | 4502 |
| 90° long 'elbow' adaptor (9" projection), Matt Black | 4514 |
| 1' Straight pipe, Ivory | 4500IV |
| 2' Straight pipe, Ivory | 4501IV |
| 3' Straight pipe, Ivory | 4502IV |
| 1' Straight pipe, Matt Ivory | 4500PI |
| 2' Straight pipe, Matt Ivory | 4501PI |
| 3' Straight pipe, Matt Ivory | 4502PI |
| Matt Black Flue collar, Conventional Flue, Huntingdon | 999-010 |
| Matt Black Flue collar, Balanced Flue, Huntingdon | 999-347 |
| Matt Ivory Flue collar, Conventional Flue, Huntingdon | 999-266 |
| Matt Ivory Flue collar, Balanced Flue, Huntingdon | 999-507 |
| Ivory Enamel Flue collar, Conventional Flue, Huntingdon | 999-456 |
| Ivory Enamel Flue collar, Balanced Flue, Huntingdon | 999-683 |

Remote Controls for Gas Huntingdon 30

| Description | Product Code |
|--|--------------|
| Standard Upgradeable Remote Control | 8455 |
| Programmable Thermostatic Upgradeable Remote Control | 8456 |

Gas Huntingdon 30 with clear door and log-effect in Matt Black



Recommended clearances between stove and other surfaces: top 9" (225mm), sides 6" (150mm), rear must be a minimum of 2" (50mm). The Huntingdon 30 has a choice of top or rear flue exit.


Gas and Electric Huntingdon 40

Gas Huntingdon 40 Tracery Door

| Product Code | Colour | Flue Type | Fuel Effect | Fuel Type | Heat Input | Heat Output | Efficiency |
|--------------|------------|--------------|-------------|-----------|------------|-------------|------------|
| ⊗ 515-161 | Matt Black | Conventional | Logs | Nat Gas | 6.60 | 4.95 | 75% |
| ⊗ 515-565 | Matt Black | Conventional | Logs | LPG | 6.70 | 5.03 | 75% |
| ⊗ 515-170 | Ivory | Conventional | Logs | Nat Gas | 6.60 | 4.95 | 75% |
| ⊗ 515-574 | Ivory | Conventional | Logs | LPG | 6.70 | 5.03 | 75% |
| ⊗ 515-179 | Matt Ivory | Conventional | Logs | Nat Gas | 6.60 | 4.95 | 75% |
| ⊗ 515-583 | Matt Ivory | Conventional | Logs | LPG | 6.70 | 5.03 | 75% |
| ⊗ 515-224 | Matt Black | Balanced | Logs | Nat Gas | 6.60 | 5.54 | 84% |
| ⊗ 515-628 | Matt Black | Balanced | Logs | LPG | 6.60 | 5.54 | 84% |
| ⊗ 515-233 | Ivory | Balanced | Logs | Nat Gas | 6.60 | 5.54 | 84% |
| ⊗ 515-646 | Ivory | Balanced | Logs | LPG | 6.60 | 5.54 | 84% |
| ⊗ 515-242 | Matt Ivory | Balanced | Logs | Nat Gas | 6.60 | 5.54 | 84% |
| ⊗ 515-655 | Matt Ivory | Balanced | Logs | LPG | 6.60 | 5.54 | 84% |

Gas Huntingdon 40 Clear Door

| | | | | | | | |
|-----------|------------|--------------|------|---------|------|------|-----|
| ⊗ 515-188 | Matt Black | Conventional | Logs | Nat Gas | 6.60 | 4.95 | 75% |
| ⊗ 515-592 | Matt Black | Conventional | Logs | LPG | 6.70 | 5.03 | 75% |
| ⊗ 515-197 | Ivory | Conventional | Logs | Nat Gas | 6.60 | 4.95 | 75% |
| ⊗ 515-601 | Ivory | Conventional | Logs | LPG | 6.70 | 5.03 | 75% |
| ⊗ 515-206 | Matt Ivory | Conventional | Logs | Nat Gas | 6.60 | 4.95 | 75% |
| ⊗ 515-619 | Matt Ivory | Conventional | Logs | LPG | 6.70 | 5.03 | 75% |
| ⊗ 515-251 | Matt Black | Balanced | Logs | Nat Gas | 6.60 | 5.54 | 84% |
| ⊗ 515-673 | Matt Black | Balanced | Logs | LPG | 6.60 | 5.54 | 84% |
| ⊗ 515-269 | Ivory | Balanced | Logs | Nat Gas | 6.60 | 5.54 | 84% |
| ⊗ 515-682 | Ivory | Balanced | Logs | LPG | 6.60 | 5.54 | 84% |
| ⊗ 515-278 | Matt Ivory | Balanced | Logs | Nat Gas | 6.60 | 5.54 | 84% |
| ⊗ 515-691 | Matt Ivory | Balanced | Logs | LPG | 6.60 | 5.54 | 84% |

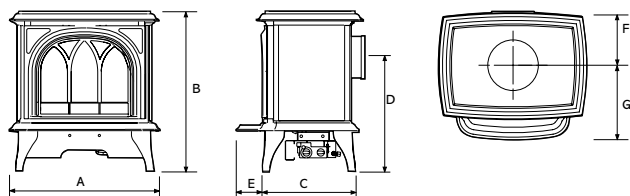

Huntingdon 40 Dimensions (see letters on diagram)

| | A | | B | | C | | D | | E | | F | | G | |
|---------|--------|-----|--------|-----|-----|-----|--------|-----|-----|----|-------|-----|--------|-----|
| | ins | mm | ins | mm | ins | mm | ins | mm | ins | mm | ins | mm | ins | mm |
| 40 (CF) | 25 1/4 | 641 | 25 3/4 | 653 | 15 | 382 | 14 1/2 | 366 | 4 | 99 | 6 1/8 | 154 | 13 3/4 | 350 |
| 40 (BF) | 25 1/4 | 641 | 25 3/4 | 653 | 15 | 382 | 15 1/4 | 386 | 4 | 99 | 7 1/4 | 183 | 12 3/4 | 321 |

Stove Flue Pipe

Balanced flue versions of the Gas Huntingdon 40 must only use the 6" stainless steel flue provided. For additional Matt Black, Matt Ivory and Ivory enamelled flue collars, please see the Gazco Stoves price list. Gazco recommends the use of 5" Matt Black enamelled stove pipe with the conventional flue version. The components required are:

| Description | Product Code |
|---|--------------|
| 1' Straight pipe, Matt Black | 4500 |
| 2' Straight pipe, Matt Black | 4501 |
| 3' Straight pipe, Matt Black | 4502 |
| 90° long 'elbow' adaptor (9" projection), Matt Black | 4514 |
| 1' Straight pipe, Ivory | 4500IV |
| 2' Straight pipe, Ivory | 4501IV |
| 3' Straight pipe, Ivory | 4502IV |
| 1' Straight pipe, Matt Ivory | 4500PI |
| 2' Straight pipe, Matt Ivory | 4501PI |
| 3' Straight pipe, Matt Ivory | 4502PI |
| Matt Black Flue collar, Conventional Flue, Huntingdon | 999-010 |
| Matt Black Flue collar, Balanced Flue, Huntingdon | 999-347 |
| Matt Ivory Flue collar, Conventional Flue, Huntingdon | 999-266 |
| Matt Ivory Flue collar, Balanced Flue, Huntingdon | 999-507 |
| Ivory Enamel Flue collar, Conventional Flue, Huntingdon | 999-456 |
| Ivory Enamel Flue collar, Balanced Flue, Huntingdon | 999-683 |

Remote Controls for Gas Huntingdon 30

| Description | Product Code |
|--|--------------|
| Standard Upgradeable Remote Control | 8455 |
| Programmable Thermostatic Upgradeable Remote Control | 8456 |

Recommended clearances between stove and other surfaces:
top 9" (225mm), sides 6" (150mm), rear must be a minimum of 2" (50mm).
The Huntingdon 40 has a choice of top or rear flue exit.

Gas and Electric Ashdon

| Product Code | Colour | Flue Type | Logs/ Coals | Fuel Type | Heat Input | Heat Output | Efficiency |
|--------------|------------|--------------|-------------|-----------|------------|-------------|------------|
| ⊗ 8513 | Matt Black | Conventional | Coals | Nat.Gas | 6.60kW | 5.15kW | 78% |
| ⊗ 8513B | Midnight | Conventional | Coals | Nat.Gas | 6.60kW | 5.15kW | 78% |
| ⊗ 8513G | Laurel | Conventional | Coals | Nat.Gas | 6.60kW | 5.15kW | 78% |
| ⊗ 8513IV | Ivory | Conventional | Coals | Nat.Gas | 6.60kW | 5.15kW | 78% |
| ⊗ 570-006 | Matt Ivory | Conventional | Coals | Nat.Gas | 6.60kW | 5.15kW | 78% |
| ⊗ 8613LUC | Matt Black | Conventional | Logs | Nat.Gas | 6.60kW | 5.28kW | 80% |
| ⊗ 8613BLUC | Midnight | Conventional | Logs | Nat.Gas | 6.60kW | 5.28kW | 80% |
| ⊗ 8613GLUC | Laurel | Conventional | Logs | Nat.Gas | 6.60kW | 5.28kW | 80% |
| ⊗ 8613IVLUC | Ivory | Conventional | Logs | Nat.Gas | 6.60kW | 5.28kW | 80% |
| ⊗ 570-022 | Matt Ivory | Conventional | Logs | Nat.Gas | 6.60kW | 5.28kW | 80% |
| ⊗ 8546LUC | Matt Black | Balanced | Logs | Nat.Gas | 6.40kW | 5.25kW | 82% |
| ⊗ 8546BLUC | Midnight | Balanced | Logs | Nat.Gas | 6.40kW | 5.25kW | 82% |
| ⊗ 8546GLUC | Laurel | Balanced | Logs | Nat.Gas | 6.40kW | 5.25kW | 82% |
| ⊗ 8546IVLUC | Ivory | Balanced | Logs | Nat.Gas | 6.40kW | 5.25kW | 82% |
| ⊗ 570-040 | Matt Ivory | Balanced | Logs | Nat.Gas | 6.40kW | 5.25kW | 82% |
| ⊗ P8513 | Matt Black | Conventional | Coals | LPG | 6.30kW | 4.91kW | 78% |
| ⊗ P8513B | Midnight | Conventional | Coals | LPG | 6.30kW | 4.91kW | 78% |
| ⊗ P8513G | Laurel | Conventional | Coals | LPG | 6.30kW | 4.91kW | 78% |
| ⊗ P8513IV | Ivory | Conventional | Coals | LPG | 6.30kW | 4.91kW | 78% |
| ⊗ 570-697 | Matt Ivory | Conventional | Coals | LPG | 6.30kW | 4.91kW | 78% |
| ⊗ P8613LUC | Matt Black | Conventional | Logs | LPG | 6.40kW | 5.25kW | 82% |
| ⊗ P8613BLUC | Midnight | Conventional | Logs | LPG | 6.40kW | 5.25kW | 82% |
| ⊗ P8613GLUC | Laurel | Conventional | Logs | LPG | 6.40kW | 5.25kW | 82% |
| ⊗ P8613IVLUC | Ivory | Conventional | Logs | LPG | 6.40kW | 5.25kW | 82% |
| ⊗ 570-664 | Matt Ivory | Conventional | Logs | LPG | 6.40kW | 5.25kW | 82% |
| ⊗ P8546LUC | Matt Black | Balanced | Logs | LPG | 6.15kW | 5.04kW | 82% |
| ⊗ P8546BLUC | Midnight | Balanced | Logs | LPG | 6.15kW | 5.04kW | 82% |
| ⊗ P8546GLUC | Laurel | Balanced | Logs | LPG | 6.15kW | 5.04kW | 82% |
| ⊗ P8546IVLUC | Ivory | Balanced | Logs | LPG | 6.15kW | 5.04kW | 82% |
| ⊗ 570-632 | Matt Ivory | Balanced | Logs | LPG | 6.15kW | 5.04kW | 82% |
| ⊗ E8613 | Matt Black | N/A | Logs | Elec | - | 2.00kW | 99% |
| ⊗ E8613MB | Midnight | N/A | Logs | Elec | - | 2.00kW | 99% |
| ⊗ E8613LG | Laurel | N/A | Logs | Elec | - | 2.00kW | 99% |
| ⊗ E8613IV | Ivory | N/A | Logs | Elec | - | 2.00kW | 99% |
| ⊗ 670-389 | Matt Ivory | N/A | Logs | Elec | - | 2.00kW | 99% |

Gas Ashdon Clear Glass

| | | | | | | | |
|------------|------------|--------------|-------|---------|--------|--------|-----|
| ⊗ 8522 | Matt Black | Conventional | Coals | Nat.Gas | 6.60kW | 5.15kW | 78% |
| ⊗ 8522B | Midnight | Conventional | Coals | Nat.Gas | 6.60kW | 5.15kW | 78% |
| ⊗ 8522G | Laurel | Conventional | Coals | Nat.Gas | 6.60kW | 5.15kW | 78% |
| ⊗ 8522V | Ivory | Conventional | Coals | Nat.Gas | 6.60kW | 5.15kW | 78% |
| ⊗ 570-070 | Matt Ivory | Conventional | Coals | Nat.Gas | 6.60kW | 5.15kW | 78% |
| ⊗ 8614LUC | Matt Black | Conventional | Logs | Nat.Gas | 6.60kW | 5.28kW | 80% |
| ⊗ 8614BLUC | Midnight | Conventional | Logs | Nat.Gas | 6.60kW | 5.28kW | 80% |
| ⊗ 8614GLUC | Laurel | Conventional | Logs | Nat.Gas | 6.60kW | 5.28kW | 80% |
| ⊗ 8614VLUC | Ivory | Conventional | Logs | Nat.Gas | 6.60kW | 5.28kW | 80% |
| ⊗ 570-099 | Matt Ivory | Conventional | Logs | Nat.Gas | 6.60kW | 5.28kW | 80% |
| ⊗ 8544LUC | Matt Black | Balanced | Logs | Nat.Gas | 6.40kW | 5.25kW | 82% |
| ⊗ 8544BLUC | Midnight | Balanced | Logs | Nat.Gas | 6.40kW | 5.25kW | 82% |
| ⊗ 8544GLUC | Laurel | Balanced | Logs | Nat.Gas | 6.40kW | 5.25kW | 82% |
| ⊗ 8544VLUC | Ivory | Balanced | Logs | Nat.Gas | 6.40kW | 5.25kW | 82% |
| ⊗ 570-123 | Matt Ivory | Balanced | Logs | Nat.Gas | 6.40kW | 5.25kW | 82% |
| ⊗ P8522 | Matt Black | Conventional | Coals | LPG | 6.30kW | 4.91kW | 78% |
| ⊗ P8522B | Midnight | Conventional | Coals | LPG | 6.30kW | 4.91kW | 78% |
| ⊗ P8522G | Laurel | Conventional | Coals | LPG | 6.30kW | 4.91kW | 78% |
| ⊗ P8522V | Ivory | Conventional | Coals | LPG | 6.30kW | 4.91kW | 78% |
| ⊗ 570-601 | Matt Ivory | Conventional | Coals | LPG | 6.30kW | 4.91kW | 78% |

Longer legs - Matt Black only

A set of longer legs, raising the height of the Ashdon by 2 1/8" (55mm) is available as an optional extra. Product code **8113**.

*Not suitable for use with optional rear closure plate.

Gas Ashdon Clear Glass (continued)


| Product Code | Colour | Flue Type | Logs/ Coals | Fuel Type | Heat Input | Heat Output | Efficiency |
|--------------|------------|--------------|-------------|-----------|------------|-------------|------------|
| ⊗ P8614LUC | Matt Black | Conventional | Logs | LPG | 6.40kW | 5.25kW | 82% |
| ⊗ P8614BLUC | Midnight | Conventional | Logs | LPG | 6.40kW | 5.25kW | 82% |
| ⊗ P8614GLUC | Laurel | Conventional | Logs | LPG | 6.40kW | 5.25kW | 82% |
| ⊗ P8614IVLUC | Ivory | Conventional | Logs | LPG | 6.40kW | 5.25kW | 82% |
| ⊗ 570-567 | Matt Ivory | Conventional | Logs | LPG | 6.40kW | 5.25kW | 82% |
| ⊗ P8544LUC | Matt Black | Balanced | Logs | LPG | 6.15kW | 5.04kW | 82% |
| ⊗ P8544BLUC | Midnight | Balanced | Logs | LPG | 6.15kW | 5.04kW | 82% |
| ⊗ P8544GLUC | Laurel | Balanced | Logs | LPG | 6.15kW | 5.04kW | 82% |
| ⊗ P8544IVLUC | Ivory | Balanced | Logs | LPG | 6.15kW | 5.04kW | 82% |
| ⊗ 570-546 | Matt Ivory | Balanced | Logs | LPG | 6.15kW | 5.04kW | 82% |

* (Balanced flue version 20 1/2" 520mm).

† (Balanced flue version 6 1/4" 158mm).

Recommended clearances between stove and other surfaces: top 9" (225mm), sides 6" (150mm), rear must be a minimum of 2" (50mm).

The Ashdon has a choice of top or rear flue exit.

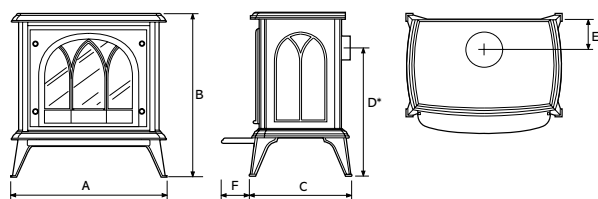

Ashdon Dimensions (see letters on diagram)

| | A | | B | | C | | D | | E | | F | |
|--------|--------|-----|--------|-----|--------|-----|--------|-----|-----|-----|-----|----|
| | ins | mm | ins | mm | ins | mm | ins | mm | ins | mm | ins | mm |
| Medium | 25 3/4 | 654 | 25 3/4 | 652 | 16 3/4 | 427 | 18 1/4 | 463 | 5 | 126 | 3 | 75 |

Stove Flue Pipe (Matt Black, Laurel Green, Midnight Blue Ivory or Matt Ivory)

Balanced flue versions of the Gas Ashdon must only use the 6" stainless steel flue provided. For additional Matt Black, Matt Ivory, Midnight Blue, Laurel Green and Ivory enamelled stove flue collars, please see the Gazco Stoves price list. Gazco recommends the use of 5" enamelled stove pipe with the conventional flue version Ashdon stove. The components usually required are:


| Description | Product Code |
|--|--------------|
| 1' Straight pipe, Matt Black | 4500 |
| 2' Straight pipe, Matt Black | 4501 |
| 3' Straight pipe, Matt Black | 4502 |
| 90° long 'elbow' adaptor (9" projection), Matt Black | 4514 |
| 1' Straight pipe, Midnight Blue | 4500MBL |
| 2' Straight pipe, Midnight Blue | 4501MBL |
| 3' Straight pipe, Midnight Blue | 4502MBL |
| 1' Straight pipe, Laurel Green | 4500LG |
| 2' Straight pipe, Laurel Green | 4501LG |
| 3' Straight pipe, Laurel Green | 4502LG |
| 1' Straight pipe, Ivory | 4500IV |
| 2' Straight pipe, Ivory | 4501IV |
| 3' Straight pipe, Ivory | 4502IV |
| 1' Straight pipe, Matt Ivory | 4500PI |
| 2' Straight pipe, Matt Ivory | 4501PI |
| 3' Straight pipe, Matt Ivory | 4502PI |
| Flue collar, Matt Black | 8549 |
| Flue collar, Midnight Blue | 8549MB |
| Flue collar, Laurel Green | 8549LG |
| Flue collar, Ivory | 8549IV |
| Flue collar, Matt Ivory | 999-407 |

Remote Controls for Gas Ashdon

| | |
|--|------|
| Standard Upgradeable Remote Control | 8455 |
| Programmable Thermostatic Upgradeable Remote Control | 8456 |

The above information is to assist in your choice of a suitable Gazco stove. This is not intended to be all the information required to install your stove. This can be obtained from your local Gazco retailer or you can download the full installation instructions from the Gazco website at www.gazco.com

Gas and Electric Steel Manhattan

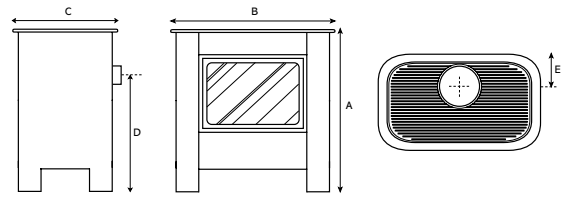

Steel Manhattan Dimensions (see letters on diagram)

| Product Code | Model | Steel Finish | Flue Type | Logs/ Coals | Fuel Type | Heat Input | Heat Output | Efficiency |
|--------------|--------|-------------------|-----------|-------------|-----------|------------|-------------|------------|
| ⊗ 8622AN | Small | Anthracite | Bal. Flue | Logs | Nat.Gas | 3.65kW | 2.85kW | 78% |
| ⊗ 8622BS | Small | Brushed Stainless | Bal. Flue | Logs | Nat.Gas | 3.65kW | 2.85kW | 78% |
| ⊗ 8619AN | Medium | Anthracite | Con. Flue | Coals | Nat.Gas | 6.60kW | 5.15kW | 78% |
| ⊗ 8619BS | Medium | Brushed Stainless | Con. Flue | Coals | Nat.Gas | 6.60kW | 5.15kW | 78% |
| ⊗ 8618ANLUC | Medium | Anthracite | Con. Flue | Logs | Nat.Gas | 6.60kW | 5.28kW | 80% |
| ⊗ 8618BSLUC | Medium | Brushed Stainless | Con. Flue | Logs | Nat.Gas | 6.60kW | 5.28kW | 80% |
| ⊗ 8620ANLUC | Medium | Anthracite | Bal. Flue | Logs | Nat.Gas | 6.40kW | 5.25kW | 82% |
| ⊗ 8620BSLUC | Medium | Brushed Stainless | Bal. Flue | Logs | Nat.Gas | 6.40kW | 5.25kW | 82% |
| ⊗ P8622AN | Small | Anthracite | Bal. Flue | Logs | LPG | 3.65kW | 2.85kW | 78% |
| ⊗ P8622BS | Small | Brushed Stainless | Bal. Flue | Logs | LPG | 3.65kW | 2.85kW | 78% |
| ⊗ P8619AN | Medium | Anthracite | Con. Flue | Coals | LPG | 6.30kW | 4.91kW | 78% |
| ⊗ P8619BS | Medium | Brushed Stainless | Con. Flue | Coals | LPG | 6.30kW | 4.91kW | 78% |
| ⊗ P8618ANLUC | Medium | Anthracite | Con. Flue | Logs | LPG | 6.40kW | 5.25kW | 82% |
| ⊗ P8618BSLUC | Medium | Brushed Stainless | Con. Flue | Logs | LPG | 6.40kW | 5.25kW | 82% |
| ⊗ P8620ANLUC | Medium | Anthracite | Bal. Flue | Logs | LPG | 6.15kW | 5.04kW | 82% |
| ⊗ P8620BSLUC | Medium | Brushed Stainless | Bal. Flue | Logs | LPG | 6.15kW | 5.04kW | 82% |
| ⊗ E8622AN | Small | Anthracite | N/A | Logs | Electric | - | 2.00kW | 99% |
| ⊗ E8622BS | Small | Brushed Stainless | N/A | Logs | Electric | - | 2.00kW | 99% |
| ⊗ E8619AN | Medium | Anthracite | N/A | Logs | Electric | - | 2.00kW | 99% |
| ⊗ E8619BS | Medium | Brushed Stainless | N/A | Logs | Electric | - | 2.00kW | 99% |

| Product Code | A | | B | | C | | D | | E | |
|--------------------------|--------|-----|--------|-----|--------|-----|--------|-----|-------|-----|
| | ins | mm | ins | mm | ins | mm | ins | mm | ins | mm |
| Small Steel | 24 1/4 | 633 | 21 1/4 | 540 | 14 1/4 | 360 | 16 1/4 | 425 | - | - |
| Medium Steel (BF) | 26 1/4 | 683 | 27 1/4 | 709 | 16 1/4 | 425 | 20 | 509 | 7 | 177 |
| Medium Steel (CF) | 26 1/4 | 683 | 27 1/4 | 709 | 16 1/4 | 425 | 17 1/4 | 455 | 5 1/4 | 144 |
| Small Electric | 24 1/4 | 633 | 21 1/4 | 540 | 14 1/4 | 360 | - | - | - | - |
| Medium Electric | 26 1/4 | 683 | 27 1/4 | 709 | 16 1/4 | 425 | - | - | - | - |

Remote Controls for Gas Steel Manhattan

| | |
|--|-------------|
| Standard Upgradeable Remote Control | 8455 |
| Programmable Thermostatic Upgradeable Remote Control | 8456 |

Stove Flue Pipes

Balanced flue versions of the Gas Manhattan must only use the 6" stainless steel flue pipe provided. For additional Matt Black enamelled flue collars, please see the Gazco Stoves price list. Gazco recommends the use of 5" matt black enamelled stove pipe with the conventional flue version Manhattan stove. The components usually required are:

| Description | Product Code |
|--|--------------|
| 1' Straight pipe | 4500 |
| 2' Straight pipe | 4501 |
| 3' Straight pipe | 4502 |
| 90° Long 'elbow' adaptor (9" projection) | 4514 |
| Flue collar | 8549 |

Recommended clearances between stove and other surfaces: top 9" (225mm), sides 6" (150mm) rear must be a minimum of 2" (50mm).

The Manhattan has a choice of top or rear flue exit. Small steel balanced flue stoves are rear exit only.

Small Electric Steel Manhattan
in Anthracite



Gas Riva2 F670 Glass & Steel

| Product Code | Front | CF/BF | Fuel Effect | Lining | Fuel Type | Heat Input (kW) | Heat Output (kW) | Efficiency |
|--------------|-------|-------|-------------|--------------|-----------|-----------------|------------------|------------|
| ⊗ 526-081 | Glass | CF | Logs | Vermiculite | Nat. Gas | 6.80 | 5.10 | 75% |
| ⊗ 526-512 | Glass | CF | Logs | Vermiculite | LPG | 6.70 | 5.00 | 75% |
| ⊗ 526-104 | Glass | CF | Logs | Black Reeded | Nat Gas | 6.80 | 5.10 | 75% |
| ⊗ 526-526 | Glass | CF | Logs | Black Reeded | LPG | 6.70 | 5.00 | 75% |
| ⊗ 526-143 | Glass | CF | Logs | Brick Effect | Nat. Gas | 6.80 | 5.10 | 75% |
| ⊗ 526-537 | Glass | CF | Logs | Brick Effect | LPG | 6.70 | 5.00 | 75% |
| ⊗ 526-169 | Glass | CF | Logs | Black Glass | Nat. Gas | 6.80 | 5.10 | 75% |
| ⊗ 526-564 | Glass | CF | Logs | Black Glass | LPG | 6.70 | 5.00 | 75% |

Gas Riva2 F670 Glass Fronted - Balanced Flue

| | | | | | | | | |
|-----------|-------|----|------|--------------|----------|------|------|-----|
| ⊗ 526-388 | Glass | BF | Logs | Vermiculite | Nat. Gas | 6.70 | 5.50 | 82% |
| ⊗ 526-720 | Glass | BF | Logs | Vermiculite | LPG | 6.80 | 5.60 | 82% |
| ⊗ 526-351 | Glass | BF | Logs | Black Reeded | Nat Gas | 6.70 | 5.50 | 82% |
| ⊗ 526-733 | Glass | BF | Logs | Black Reeded | LPG | 6.80 | 5.60 | 82% |
| ⊗ 526-364 | Glass | BF | Logs | Brick Effect | Nat. Gas | 6.70 | 5.50 | 82% |
| ⊗ 526-759 | Glass | BF | Logs | Brick Effect | LPG | 6.80 | 5.60 | 82% |
| ⊗ 526-390 | Glass | BF | Logs | Black Glass | Nat. Gas | 6.70 | 5.50 | 82% |
| ⊗ 526-785 | Glass | BF | Logs | Black Glass | LPG | 6.80 | 5.60 | 82% |

Gas Riva2 F670 Steel Fronted - Conventional Flue

| | | | | | | | | |
|-----------|-------|----|------|--------------|----------|------|------|-----|
| ⊗ 526-003 | Steel | CF | Logs | Vermiculite | Nat. Gas | 6.80 | 5.10 | 75% |
| ⊗ 526-408 | Steel | CF | Logs | Vermiculite | LPG | 6.70 | 5.00 | 75% |
| ⊗ 526-016 | Steel | CF | Logs | Black Reeded | Nat Gas | 6.80 | 5.10 | 75% |
| ⊗ 526-421 | Steel | CF | Logs | Black Reeded | LPG | 6.70 | 5.00 | 75% |
| ⊗ 526-042 | Steel | CF | Logs | Brick Effect | Nat. Gas | 6.80 | 5.10 | 75% |
| ⊗ 526-434 | Steel | CF | Logs | Brick Effect | LPG | 6.70 | 5.00 | 75% |
| ⊗ 526-356 | Steel | CF | Logs | Black Glass | Nat. Gas | 6.80 | 5.10 | 75% |
| ⊗ 526-499 | Steel | CF | Logs | Black Glass | LPG | 6.70 | 5.00 | 75% |


Gas Riva2 F670 Steel Fronted - Balanced Flue

| | | | | | | | | |
|-----------|-------|----|------|--------------|----------|------|------|-----|
| ⊗ 526-195 | Steel | BF | Logs | Vermiculite | Nat. Gas | 6.70 | 5.50 | 82% |
| ⊗ 526-578 | Steel | BF | Logs | Vermiculite | LPG | 6.80 | 5.60 | 82% |
| ⊗ 526-247 | Steel | BF | Logs | Black Reeded | Nat Gas | 6.70 | 5.50 | 82% |
| ⊗ 526-681 | Steel | BF | Logs | Black Reeded | LPG | 6.80 | 5.60 | 82% |
| ⊗ 526-286 | Steel | BF | Logs | Brick Effect | Nat. Gas | 6.70 | 5.50 | 82% |
| ⊗ 526-694 | Steel | BF | Logs | Brick Effect | LPG | 6.80 | 5.60 | 82% |
| ⊗ 526-325 | Steel | BF | Logs | Black Glass | Nat. Gas | 6.70 | 5.50 | 82% |
| ⊗ 526-707 | Steel | BF | Logs | Black Glass | LPG | 6.80 | 5.60 | 82% |


Gas Riva2 F670 - Accessories

| | |
|---------|--|
| 926-001 | Riva2 F670 Apex Stand |
| 934-096 | Riva2 670 Conventional Flue, Black Reeded Lining Set |
| 934-103 | Riva2 670 Conventional Flue, Vermiculite Lining Set |
| 934-119 | Riva2 670 Conventional Flue, Brick Effect Lining Set |
| 934-174 | Riva2 670 Conventional Flue, Black Glass Lining Set |
| 934-127 | Riva2 670 Balanced Flue, Black Reeded Lining Set |
| 934-111 | Riva2 670 Balanced Flue, Vermiculite Lining Set |
| 934-137 | Riva2 670 Balanced Flue, Brick Effect Lining Set |
| 934-200 | Riva2 670 Balanced Flue, Black Glass Lining Set |
| 999-620 | Remote System Mains Adaptor |

Gas Riva2 F670 Glass & Steel Dimensions (mm)

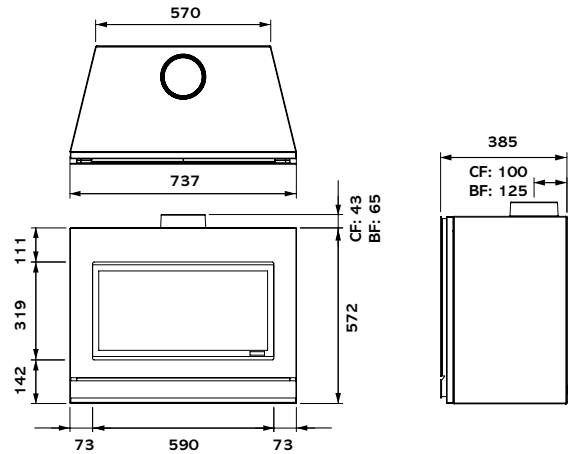

Gas Riva2 F670 Apex Stand Dimensions (mm)

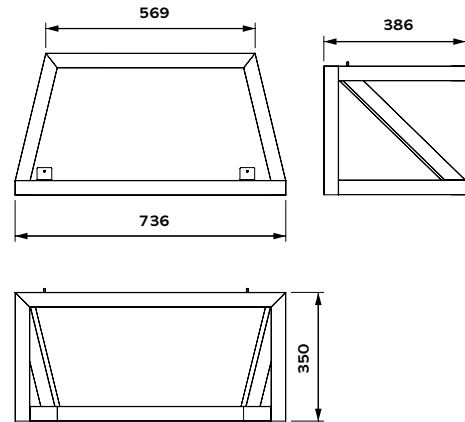

Recommended clearances between stove and other surfaces: top 9" (225mm), sides 6" (150mm), rear 2" (50mm).

The Gas Riva2 F670 stoves can also be placed on one of our ten Riva Stove Benches. Please see page 66 for further information.

Stove Flue Pipe

Balanced flue versions of the Gas Riva2 F670 Stoves must only use the 6" stainless steel or anthracite flue pipe. For the conventional flue version of the Gas Riva2 F670 Gazco recommends the use of 5" matt black or gloss enamelled stove pipe. The components usually required are:

| Matt Black Flue Pipe | Product Code | Gloss Flue Pipe | Product Code |
|--|--------------|------------------|--------------|
| 1' Straight pipe | 4500 | 1' Straight pipe | 4500GB |
| 2' Straight pipe | 4501 | 2' Straight pipe | 4501GB |
| 3' Straight pipe | 4502 | 3' Straight pipe | 4502GB |
| 90° Long 'elbow' adaptor (9" projection) | 4514 | 135° Bend | 4512GB |

Gas & Electric Riva Vision

| Product Code | Model | CF/BF | Fuel Effect | Lining | Fuel Type | Flue Exit | Heat Input (kW) | Heat Output (kW) | Efficiency |
|--|-------|-------|-------------|-------------|-----------|-----------|-----------------|------------------|------------|
| Gas Riva Vision Small - Manual & Upgradeable Remote Options | | | | | | | | | |
| ⊗ 526-013 | Small | CF | Logs | Vermiculite | Nat. Gas | Rear | 3.4 | 2.55 | 75% |
| ⊗ 526-643 | Small | CF | Logs | Vermiculite | LPG | Rear | 3.2 | 2.40 | 75% |
| ⊗ 526-021 | Small | CF | Logs | Vermiculite | Nat. Gas | Top | 3.4 | 2.55 | 75% |
| ⊗ 526-656 | Small | CF | Logs | Vermiculite | LPG | Top | 3.2 | 2.40 | 75% |
| ⊗ 526-046 | Small | BF | Logs | Vermiculite | Nat. Gas | Rear | 3.2 | 2.56 | 80% |
| ⊗ 526-405 | Small | BF | Logs | Vermiculite | LPG | Rear | 3.2 | 2.56 | 80% |

| | | | | | | | | | |
|---|------|----|------|-------------|----------|------|------|------|-----|
| Gas Riva Vision Midi - Manual & Upgradeable Remote Options | | | | | | | | | |
| ⊗ 526-065 | Midi | CF | Logs | Vermiculite | Nat. Gas | Rear | 4.55 | 3.41 | 75% |
| ⊗ 526-417 | Midi | CF | Logs | Vermiculite | LPG | Rear | 4.35 | 3.26 | 75% |
| ⊗ 526-077 | Midi | CF | Logs | Vermiculite | Nat. Gas | Top | 4.55 | 3.41 | 75% |
| ⊗ 526-440 | Midi | CF | Logs | Vermiculite | LPG | Top | 4.35 | 3.26 | 75% |
| ⊗ 526-100 | Midi | BF | Logs | Vermiculite | Nat. Gas | Rear | 4.3 | 3.44 | 80% |
| ⊗ 526-471 | Midi | BF | Logs | Vermiculite | LPG | Rear | 4.3 | 3.44 | 80% |
| ⊗ 526-109 | Midi | BF | Logs | Vermiculite | Nat. Gas | Top | 4.3 | 3.44 | 80% |
| ⊗ 526-486 | Midi | BF | Logs | Vermiculite | LPG | Top | 4.3 | 3.44 | 80% |

| | | | | | | | | | |
|---|--------|----|------|-------------|----------|------|-----|------|-----|
| Gas Riva Vision Medium - Manual & Upgradeable Remote Options | | | | | | | | | |
| ⊗ 526-122 | Medium | CF | Logs | Vermiculite | Nat. Gas | Rear | 6.6 | 4.95 | 75% |
| ⊗ 526-515 | Medium | CF | Logs | Vermiculite | LPG | Rear | 6.7 | 5.03 | 75% |
| ⊗ 526-137 | Medium | CF | Logs | Vermiculite | Nat. Gas | Top | 6.6 | 4.95 | 75% |
| ⊗ 526-539 | Medium | CF | Logs | Vermiculite | LPG | Top | 6.7 | 5.03 | 75% |
| ⊗ 526-155 | Medium | BF | Logs | Vermiculite | Nat. Gas | Rear | 6.6 | 5.54 | 84% |
| ⊗ 526-580 | Medium | BF | Logs | Vermiculite | LPG | Rear | 6.6 | 5.54 | 84% |
| ⊗ 526-176 | Medium | BF | Logs | Vermiculite | Nat. Gas | Top | 6.6 | 5.54 | 84% |
| ⊗ 526-612 | Medium | BF | Logs | Vermiculite | LPG | Top | 6.6 | 5.54 | 84% |

| | | | | | | | | | |
|---|-------|----|-----------|-------------|----------|-----|------|------|-----|
| Gas Riva Vision Large - Thermostatic Control (Top exit only) | | | | | | | | | |
| ⊗ 526-327 | Large | CF | W. Stones | B.Enamel | Nat. Gas | Top | 6.90 | 5.20 | 75% |
| ⊗ 526-428 | Large | CF | W. Stones | B.Enamel | LPG | Top | 6.90 | 5.20 | 75% |
| ⊗ 526-274 | Large | CF | Logs | Vermiculite | Nat. Gas | Top | 6.70 | 5.00 | 75% |
| ⊗ 526-616 | Large | CF | Logs | Vermiculite | LPG | Top | 6.30 | 5.10 | 81% |
| ⊗ 526-044 | Large | CF | Logs | B.Reeded | Nat. Gas | Top | 6.90 | 5.20 | 75% |
| ⊗ 526-599 | Large | CF | Logs | B.Reeded | LPG | Top | 6.90 | 5.20 | 75% |
| ⊗ 526-059 | Large | BF | W. Stones | B.Enamel | Nat. Gas | Top | 6.30 | 5.10 | 81% |
| ⊗ 526-551 | Large | BF | W. Stones | B.Enamel | LPG | Top | 6.10 | 4.95 | 81% |
| ⊗ 526-397 | Large | BF | Logs | Vermiculite | Nat. Gas | Top | 6.40 | 5.20 | 81% |
| ⊗ 526-730 | Large | BF | Logs | Vermiculite | LPG | Top | 6.30 | 5.10 | 81% |
| ⊗ 526-378 | Large | BF | Logs | B.Reeded | Nat. Gas | Top | 6.40 | 5.20 | 81% |
| ⊗ 526-741 | Large | BF | Logs | B.Reeded | LPG | Top | 6.30 | 5.10 | 81% |

Gas Riva Vision - Accessories

| | | | | | | | | | |
|---------|---|--|--|--|--|--|--|--|--|
| 8455 | Standard Upgradeable Remote Control for Riva Vision Small, Midi & Medium | | | | | | | | |
| 8456 | Programmable Thermostatic Upgradeable Remote for Riva Vision Small, Midi & Medium | | | | | | | | |
| 923-797 | Clear Glass fuel effect upgrade for Riva Vision Large only ◊ | | | | | | | | |
| 923-746 | Red Glass fuel effect upgrade for Riva Vision Large only ◊ | | | | | | | | |
| 923-735 | Black Glass fuel effect upgrade for Riva Vision Large only ◊ | | | | | | | | |
| 923-517 | Large Riva Vision Conventional Flue - Black Reeded Lining Set ‡ | | | | | | | | |
| 923-607 | Large Riva Vision Balanced Flue - Black Reeded Lining Set ‡ | | | | | | | | |
| 999-620 | Thermostatic system mains adaptor for Riva Vision Large only | | | | | | | | |


◊ Available as an upgrade to Riva Vision Large models with White Stone fuel bed
 ‡ Available for Riva Vision Large models with Log effect fuel bed

Electric Riva Vision with Remote Control

| | | | | | | | | | |
|-----------|--------|---|------|---|----------|---|---|------|-----|
| ⊗ 634-680 | Small | - | Logs | - | Electric | - | - | 2.00 | 99% |
| ⊗ 634-733 | Midi | - | Logs | - | Electric | - | - | 2.00 | 99% |
| ⊗ 634-795 | Medium | - | Logs | - | Electric | - | - | 2.00 | 99% |

The above information is to assist in your choice of a suitable Gazco stove. This is not intended to be all the information required to install your stove. This can be obtained from your local Gazco retailer or you can download the full installation instructions from the Gazco website at www.gazco.com

Gas Riva Vision Small, Midi & Medium Dimensions

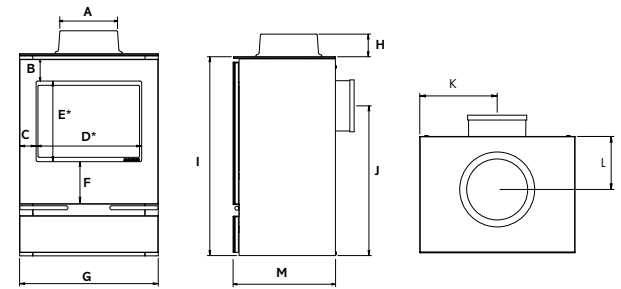

*Glass Viewing Area

Gas Riva Vision Small, Midi & Medium Dimensions (see letters on diagram)


| All sizes in mm | A | B | C | D | E | F | G | H | I | J | K | L | M |
|-----------------------------|-----|----|----|-----|-----|-----|-----|-----|-----|-----|-------|-----|-----|
| Small CF | 143 | 57 | 58 | 254 | 240 | 122 | 370 | 43 | 529 | 359 | 185 | 97 | 289 |
| Small BF¹ | N/A | 57 | 58 | 254 | 240 | 122 | 370 | N/A | 529 | 379 | 185 | N/A | 289 |
| Midi CF | 143 | 65 | 50 | 316 | 241 | 127 | 415 | 43 | 605 | 436 | 207.5 | 96 | 311 |
| Midi BF | 173 | 65 | 50 | 316 | 241 | 127 | 415 | 69 | 605 | 456 | 207.5 | 142 | 311 |
| Medium CF | 143 | 77 | 64 | 408 | 274 | 150 | 535 | 43 | 677 | 487 | 268 | 100 | 353 |
| Medium BF | 173 | 77 | 64 | 408 | 274 | 150 | 535 | 69 | 677 | 538 | 268 | 139 | 353 |

¹Riva Vision Small Balanced flue is rear flue exit only

Electric Riva Vision Dimensions (see letters on diagram)

| All sizes in mm | A | B | C | D | E | F | G | H | I | J | K | L | M |
|-----------------|-----|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Small | N/A | 57 | 58 | 254 | 240 | 122 | 370 | N/A | 555 | N/A | N/A | N/A | 299 |
| Midi | N/A | 65 | 50 | 316 | 241 | 127 | 415 | N/A | 604 | N/A | N/A | N/A | 320 |
| Medium | N/A | 77 | 64 | 408 | 274 | 152 | 535 | N/A | 676 | N/A | N/A | N/A | 363 |

Gas Riva Vision Large Dimensions

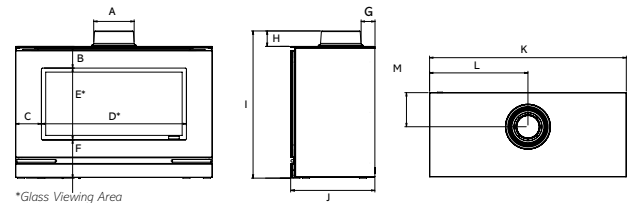

*Glass Viewing Area

Gas Riva Vision Large Dimensions (see letters on diagram)

| All sizes in mm | A | B | C | D | E | F | G | H | I | J | K | L | M |
|-----------------|-----|----|-----|-----|-----|-----|----|----|-----|-----|-----|-----|-----|
| Large CF | 144 | 96 | 115 | 646 | 320 | 172 | 66 | 43 | 631 | 390 | 876 | 438 | 140 |
| Large BF | 173 | 97 | 115 | 646 | 320 | 171 | 62 | 69 | 656 | 375 | 876 | 438 | 152 |

Recommended clearances between stove and other surfaces: top 9" (225mm), sides 6" (150mm), rear 2" (50mm). The Gas Riva Vision Large has a top flue exit only.

The Gas Riva Vision stoves can also be placed on one of our ten Riva Stove Benches. Please see page 57 for further information.

Stove Flue Pipe

Balanced flue versions of the Gas Riva Visions must only use the 6" stainless steel or anthracite flue pipe. For the conventional flue version of the Gas Riva Vision Gazco recommends the use of 5" matt black or gloss enamelled stove pipe. The components usually required are:

| Matt Black Flue Pipe | Product Code | Gloss Flue Pipe | Product Code |
|--|--------------|------------------|--------------|
| 1' Straight pipe | 4500 | 1' Straight pipe | 4500GB |
| 2' Straight pipe | 4501 | 2' Straight pipe | 4501GB |
| 3' Straight pipe | 4502 | 3' Straight pipe | 4502GB |
| 90° Long 'elbow' adaptor (9" projection) | 4514 | 135° Bend | 4512GB |
| Flue collar | 8549 | | |

Studio Freestanding Gas

The below information is to assist in your choice of a suitable Gazco stove. This is not intended to be all the information required to install your stove. This can be obtained from your local Gazco retailer or you can download the full installation instructions from the Gazco website at www.gazco.com

Studio 1 Freestanding

| Product Code | Front Finish | CF/BF | Fuel Effect | Lining | Fuel Type | Heat Input (kW) | Heat Output (kW) | Efficiency |
|--------------|--------------|-------|-------------|--------------|-----------|-----------------|------------------|------------|
| ⊗ 508-007 | Black | CF | Logs | Vermiculite | Nat. Gas | 6.70 | 4.70 | 70% |
| ⊗ 508-016 | Black | CF | Logs | Black Reeded | Nat. Gas | 6.70 | 4.70 | 70% |
| ⊗ 508-405 | Black | CF | Logs | Vermiculite | LPG | 6.90 | 4.83 | 70% |
| ⊗ 508-414 | Black | CF | Logs | Black Reeded | LPG | 6.90 | 4.83 | 70% |
| ⊗ 508-025 | White | CF | Logs | Vermiculite | Nat. Gas | 6.70 | 4.70 | 70% |
| ⊗ 508-034 | White | CF | Logs | Black Reeded | Nat. Gas | 6.70 | 4.70 | 70% |
| ⊗ 508-423 | White | CF | Logs | Vermiculite | LPG | 6.90 | 4.83 | 70% |
| ⊗ 508-441 | White | CF | Logs | Black Reeded | LPG | 6.90 | 4.83 | 70% |

Studio 1 Freestanding - Log Effect, Balanced Flue

| | | | | | | | | |
|-----------|-------|----|------|--------------|----------|------|------|-----|
| ⊗ 508-044 | Black | BF | Logs | Vermiculite | Nat. Gas | 6.40 | 5.20 | 81% |
| ⊗ 508-052 | Black | BF | Logs | Black Reeded | Nat. Gas | 6.40 | 5.20 | 81% |
| ⊗ 508-450 | Black | BF | Logs | Vermiculite | LPG | 6.30 | 5.10 | 81% |
| ⊗ 508-468 | Black | BF | Logs | Black Reeded | LPG | 6.30 | 5.10 | 81% |
| ⊗ 508-061 | White | BF | Logs | Vermiculite | Nat. Gas | 6.40 | 5.20 | 81% |
| ⊗ 508-070 | White | BF | Logs | Black Reeded | Nat. Gas | 6.40 | 5.20 | 81% |
| ⊗ 508-672 | White | BF | Logs | Vermiculite | LPG | 6.30 | 5.10 | 81% |
| ⊗ 508-594 | White | BF | Logs | Black Reeded | LPG | 6.30 | 5.10 | 81% |

Studio 1 Freestanding - White Stones, Conventional Flue

| | | | | | | | | |
|-----------|-------|----|-----------|--------------|----------|------|------|-----|
| ⊗ 508-013 | Black | CF | W. Stones | Enamel Black | Nat. Gas | 6.90 | 4.85 | 70% |
| ⊗ 508-536 | Black | CF | W. Stones | Enamel Black | LPG | 6.90 | 4.85 | 70% |
| ⊗ 508-039 | White | CF | W. Stones | Enamel Black | Nat. Gas | 6.90 | 4.85 | 70% |
| ⊗ 508-434 | White | CF | W. Stones | Enamel Black | LPG | 6.90 | 4.85 | 70% |

Studio 1 Freestanding - White Stones, Balanced Flue

| | | | | | | | | |
|-----------|-------|----|-----------|--------------|----------|------|------|-----|
| ⊗ 508-065 | Black | BF | W. Stones | Enamel Black | Nat. Gas | 6.30 | 5.10 | 81% |
| ⊗ 508-611 | Black | BF | W. Stones | Enamel Black | LPG | 6.10 | 4.95 | 81% |
| ⊗ 508-091 | White | BF | W. Stones | Enamel Black | Nat. Gas | 6.30 | 5.10 | 81% |
| ⊗ 508-664 | White | BF | W. Stones | Enamel Black | LPG | 6.10 | 4.95 | 81% |


Plinth & Bench Mounting Choice (Required)

| | |
|---------|--------------------------------------|
| 999-022 | Studio 1 Freestanding Plinth - Black |
| 999-035 | Studio 1 Freestanding Plinth - White |
| 999-101 | Studio 1 Freestanding Bench - Black |
| 999-114 | Studio 1 Freestanding Bench - White |

Accessories

| | |
|---------|--|
| 923-797 | Studio 1 Clear Glass Fuel Effect Upgrade (For White Stone Models only) |
| 923-735 | Studio 1 Black Glass Fuel Effect Upgrade (For White Stone Models only) |
| 923-746 | Studio 1 Red Glass Fuel Effect Upgrade (For White Stone Models only) |
| 923-517 | Studio 1 CF - Black Reeded Lining Set (For Log Effect Models only) |
| 923-010 | Studio 1 CF - Vermiculite Reeded Lining Set (For Log Effect Models only) |
| 923-607 | Studio 1 BF - Black Reeded Lining Set (For Log Effect Models only) |
| 923-433 | Studio 1 BF - Vermiculite Reeded Lining Set (For Log Effect Models only) |
| 999-620 | Remote System Mains Adaptor |

Studio Freestanding Gas Dimensions (mm)

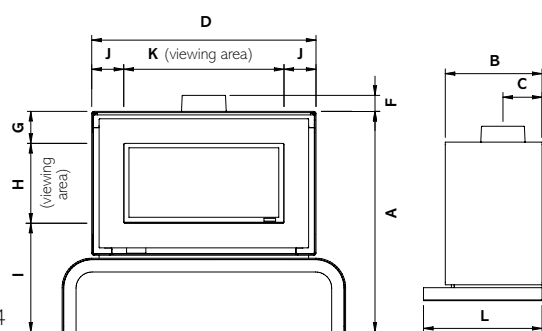

Studio 2 Freestanding

| Product Code | Front Finish | CF/BF | Fuel Effect | Lining | Fuel Type | Heat Input (kW) | Heat Output (kW) | Efficiency |
|--------------|--------------|-------|-------------|--------------|-----------|-----------------|------------------|------------|
| 508-709 | Black | CF | Logs | Vermiculite | Nat. Gas | 8.50 | 6.65 | 78% |
| 508-088 | Black | CF | Logs | Black Reeded | Nat. Gas | 8.50 | 6.65 | 78% |
| 508-495 | Black | CF | Logs | Vermiculite | LPG | 8.80 | 6.85 | 78% |
| 508-504 | Black | CF | Logs | Black Reeded | LPG | 8.80 | 6.85 | 78% |
| 508-253 | White | CF | Logs | Vermiculite | Nat. Gas | 8.50 | 6.65 | 78% |
| 508-266 | White | CF | Logs | Black Reeded | Nat. Gas | 8.50 | 6.65 | 78% |
| 508-513 | White | CF | Logs | Vermiculite | LPG | 8.80 | 6.85 | 78% |
| 508-522 | White | CF | Logs | Black Reeded | LPG | 8.80 | 6.85 | 78% |

Studio 2 Freestanding - Log Effect, Balanced Flue

| | | | | | | | | |
|-----------|-------|----|------|--------------|----------|------|------|-----|
| ⊗ 508-115 | Black | BF | Logs | Vermiculite | Nat. Gas | 8.60 | 7.00 | 81% |
| ⊗ 508-124 | Black | BF | Logs | Black Reeded | Nat. Gas | 8.60 | 7.00 | 81% |
| ⊗ 508-540 | Black | BF | Logs | Vermiculite | LPG | 8.00 | 6.50 | 81% |
| ⊗ 508-558 | Black | BF | Logs | Black Reeded | LPG | 8.00 | 6.50 | 81% |
| ⊗ 508-133 | White | BF | Logs | Vermiculite | Nat. Gas | 8.60 | 7.00 | 81% |
| ⊗ 508-142 | White | BF | Logs | Black Reeded | Nat. Gas | 8.60 | 7.00 | 81% |
| ⊗ 508-567 | White | BF | Logs | Vermiculite | LPG | 8.00 | 6.50 | 81% |
| ⊗ 508-585 | White | BF | Logs | Black Reeded | LPG | 8.00 | 6.50 | 81% |

Studio 2 Freestanding - White Stones, Conventional Flue

| | | | | | | | | |
|---------|-------|----|-----------|--------------|----------|------|------|-----|
| 508-104 | Black | CF | W. Stones | Enamel Black | Nat. Gas | 8.30 | 6.50 | 78% |
| 508-473 | Black | CF | W. Stones | Enamel Black | LPG | 8.30 | 6.50 | 78% |
| 508-292 | White | CF | W. Stones | Enamel Black | Nat. Gas | 8.30 | 6.50 | 78% |
| 508-486 | White | CF | W. Stones | Enamel Black | LPG | 8.30 | 6.50 | 78% |

Studio 2 Freestanding - White Stones, Balanced Flue

| | | | | | | | | |
|-----------|-------|----|-----------|--------------|----------|------|------|-----|
| ⊗ 508-130 | Black | BF | W. Stones | Enamel Black | Nat. Gas | 8.40 | 6.80 | 81% |
| ⊗ 508-499 | Black | BF | W. Stones | Enamel Black | LPG | 7.30 | 5.92 | 81% |
| ⊗ 508-156 | White | BF | W. Stones | Enamel Black | Nat. Gas | 8.40 | 6.80 | 81% |
| ⊗ 508-525 | White | BF | W. Stones | Enamel Black | LPG | 7.30 | 5.92 | 81% |

Plinth & Bench Mounting Choice (Required)


| | |
|---------|--------------------------------------|
| 999-048 | Studio 2 Freestanding Plinth - Black |
| 999-087 | Studio 2 Freestanding Plinth - White |
| 999-127 | Studio 2 Freestanding Bench - Black |
| 999-166 | Studio 2 Freestanding Bench - White |

Accessories

| | |
|---------|--|
| 923-751 | Studio 2 Clear Glass Fuel Effect Upgrade (For White Stone Models only) |
| 923-760 | Studio 2 Black Glass Fuel Effect Upgrade (For White Stone Models only) |
| 923-724 | Studio 2 Red Glass Fuel Effect Upgrade (For White Stone Models only) |
| 923-744 | Studio 2 CF - Black Reeded Lining Set (For Log Effect Models only) |
| 923-337 | Studio 2 CF - Vermiculite Reeded Lining Set (For Log Effect Models only) |
| 923-476 | Studio 2 BF - Black Reeded Lining Set (For Log Effect Models only) |
| 923-938 | Studio 2 BF - Vermiculite Reeded Lining Set (For Log Effect Models only) |
| 999-620 | Remote System Mains Adaptor |

All sizes in mm

| | A | B | C | D | E | F | G | H | I | J | K | L |
|-----------------------|-----|-----|--------------------|------|------|------------------|-----|-----|-----|-----|-----|-----|
| Studio 1 FS on Bench | 896 | 396 | CF: 148 BF: 160 | 910 | 1150 | CF: 43 BF: 65 | 130 | 324 | 442 | 130 | 650 | - |
| Studio 2 FS on Bench | 896 | 396 | CF: 148 BF: 160 | 1110 | 1350 | CF: 43 BF: 65 | 130 | 324 | 442 | 130 | 850 | - |
| Studio 1 FS on Plinth | 649 | 396 | CF: 148 BF: 160 | 910 | 1105 | CF: 43 BF: 65 | 130 | 324 | 195 | 130 | 650 | 485 |
| Studio 2 FS on Plinth | 649 | 396 | CF: 148 BF: 160 | 1110 | 1305 | CF: 43 BF: 65 | 130 | 324 | 195 | 130 | 850 | 485 |



Recommended clearances between stove and other surfaces: top 9" (225mm), sides 6" (150mm), rear 2" (50mm).

Balanced Flue Gas Stove Systems


The Gazco Balanced Flue system means no chimney is not a problem if you opt for a balanced flue gas stove, as it draws combustion air from outside through its concentric pipe systems. A full range of optional flue components is available to suit configurations shown on page 54.

Gazco have specifically developed a range of flue system components to complement your balanced flue stove. Crafted from 304 grade stainless steel and aluminium with some items additionally offered in anthracite and matt ivory paint finishes. Designed with ease of installation and flexibility in mind, these flue systems simply push together without the requirement for lockign bands or screws. Both the inner and outer pipes are secured with easy fit, self locking, high temperature silicone seals. For further information, please speak to your retailer or visit www.gazco.com



Components for balanced flue models

| Basic Stainless Steel Kits | Product Code | Additional Stainless Steel components for top exit (as required) | Product Code |
|---|------------------|---|------------------|
| Rear exit, horizontal - complete with terminal guard | 8526 | 200mm straight (effective length 140mm) | 8527 |
| Top exit, up & out, stoves | 8523 | 500mm straight (effective length 440mm) | 8528 |
| Top exit, up & out, Riva Vision Large & F67 | 8534 | 1000mm straight (effective length 940mm) | 8529 |
| Top exit, up & out, Riva Vision Medium | 8509 | 364-554mm adjustable straight | 999-062 |
| Top exit, vertical | 8524 | 15° bend | 999-003 |
| 45° offset bend (set of two) for use with 8524 | 8530 | 30° bend | 999-016 |
| Top exit vertical, Huntingdon 30, Stockton 5 & Riva Vision Midi | 999-539 | 45° bend | 8507 |
| | | 90° bend | 8508 |
| | | Rear flue terminal | 999-096 |
| | | Horizontal flue terminal (wall) | 999-105 |
| | | Vertical flue terminal (roof) | 999-141 |
| | | Fixed wall support | 999-072 |
| | | Adjustable wall support | 999-130 |
| | | External wall finishing plate | 999-235 |
| | | | |
| Basic Anthracite Steel Kits | Product Code | Additional Matt Ivory Steel components for top exit (as required) | Product Code |
| Top exit, up & out, stoves | 8523AN | 200mm straight (effective length 140mm) | 999-357 |
| Top exit, up & out, Riva Vision Large & F670 | 8534AN | 500mm straight (effective length 440mm) | 999-372 |
| Top exit, up & out, Riva Vision Medium | 8509AN | 1000mm straight (effective length 940mm) | 999-391 |
| Top exit, vertical | 8524AN | 15° bend | 999-051 |
| 45° offset bend (set of two) for use with 8524AN | 8530AN | 30° bend | 999-067 |
| Top exit vertical, Huntingdon 30, Stockton 5 & Riva Vision Midi | 999-539AN | 45° bend | 999-172 |
| | | 90° bend | 999-284 |
| | | | |
| Basic Matt Ivory Steel Kits | Product Code | Terminal Guards | Product code |
| Top exit, up & out, stoves | 999-111 | Rear exit | 999-159 |
| Top exit, vertical | 999-301 | Horizontal exit | 999-201 |
| Top exit vertical, Huntingdon 30 & Stockton 5 | 999-224 | | |
| 45° offset bend (set of two) for use with 999-301 | 999-148 | Aquaseal Flashings | Product code |
| | | 125-175mm Aluminium Base EPDM Black to 115°C | FXQ-052 |
| | | 150-300mm Aluminium Base EPDM Black to 115°C | FXQ-053 |
| | | 150-200mm Lead Base EPDM Black to 115°C | FXQ-054 |
| | | 150-250mm Sq Section EPDM Black to 115°C | FXQ-058 |
| | | 150-250mm Sq Section/Metal EPDM Black to 115°C | FXQ-059 |
| | | EPDM Flashign Fixing Kit | FXQ-059SK |
| | | Lead Flashings | Product code |
| | | Flat Lead Flashing | 999-154 |
| | | 30-40 Degree Lead Flashing | 999-161 |
| | | 40-50 Degree Lead Flashing | 999-174 |
| | | 45-50 Degree Lead Flashing | 999-182 |
| | | 45-50 Degree Ridge Flashing | 999-193 |
| | | Additional Components | Product code |
| | | Roof Support Balanced Flue | 999-032 |
| | | Fire Stop Balanced Flue | 999-040 |
| | | Storm Collar Balanced Flue | 999-046R |

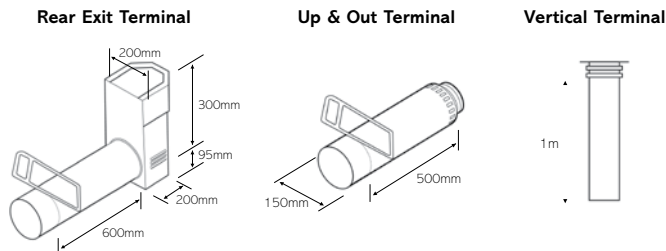

| Additional Cast Iron components for top exit | Product Code |
|--|----------------|
| Flue collar, Matt Black | 8548 |
| Flue collar, Midnight Blue | 8548MB |
| Flue collar, Laurel Green | 8548LG |
| Flue collar, Ivory | 8548IV |
| Flue collar, Matt Ivory | 999-433 |

| Additional Anthracite Steel components for top exit (as required) | Product Code |
|---|----------------|
| 200mm straight (effective length 140mm) | 8527AN |
| 500mm straight (effective length 440mm) | 8528AN |
| 1000mm straight (effective length 940mm) | 8529AN |
| 15° bend | 999-031 |
| 30° bend | 999-078 |
| 45° bend | 8507AN |
| 90° bend | 8508AN |

Riva Stove Benches

These versatile steel benches are compatible with the Gas and Electric Riva Vision and Gas Riva2 F670 Stoves (page 38-47). With five widths and two heights, they offer infinitely greater design possibilities to accommodate your individual styling requirements.

Design Features

- Sturdy steel construction
- Choice of five widths and two heights
- Durable matt black finish
- Proportioned 60mm wide legs
- Allows for central or offset stove positioning

| Product Code | Product | W (mm) | H (mm) | D (mm) |
|-------------------|---------------------|--------|--------|--------|
| RVACLB45B | 45 Low Riva bench | 450 | 250 | 420 |
| RVACB45B | 45 High Riva bench | 450 | 350 | 420 |
| RVACLB100B | 100 Low Riva bench | 1000 | 250 | 420 |
| RVACB100B | 100 High Riva bench | 1000 | 350 | 420 |
| RVACLB120B | 120 Low Riva bench | 1200 | 250 | 420 |
| RVACB120B | 120 High Riva bench | 1200 | 350 | 420 |
| RVACLB140B | 140 Low Riva bench | 1400 | 250 | 420 |
| RVACB140B | 140 High Riva bench | 1400 | 350 | 420 |
| RVACLB180B | 180 Low Riva bench | 1800 | 250 | 465 |
| RVACB180B | 180 High Riva bench | 1800 | 350 | 465 |



Gazco is a member of the Stovax Group which manufactures and distributes many other high quality fireplace products:



Gazco gratefully acknowledges the assistance of the following companies with photographic settings:

Furnishings and Ornaments:- www.furniturevillage.co.uk; www.romo.com; www.debenhams.com; www.eclectique.co.uk; www.theorangetree.co.uk; www.justshutters.co.uk; www.homebase.co.uk; www.lauraashley.com; www.faginsantiques.com; www.nestinteriors.com; www.stbridgetnurseryseries.co.uk; www.ashorejewellery.co.uk; www.johnlewis.com; www.veryvintagehire.co.uk; www.carpetright.co.uk **Wood Mantels:-** www.stovax.com **Stone Mantels:-** www.rudloe-stone.com; www.farmington.co.uk; www.bnspp.co.uk
Paintings:- www.easyart.com **Flooring:-** www.beachbros.co.uk; www.originalstyle.com; www.carpetright.com



