




Step1: Push the plastic part which is behind the head part

Step2: Dismount the plastic parts on the both side

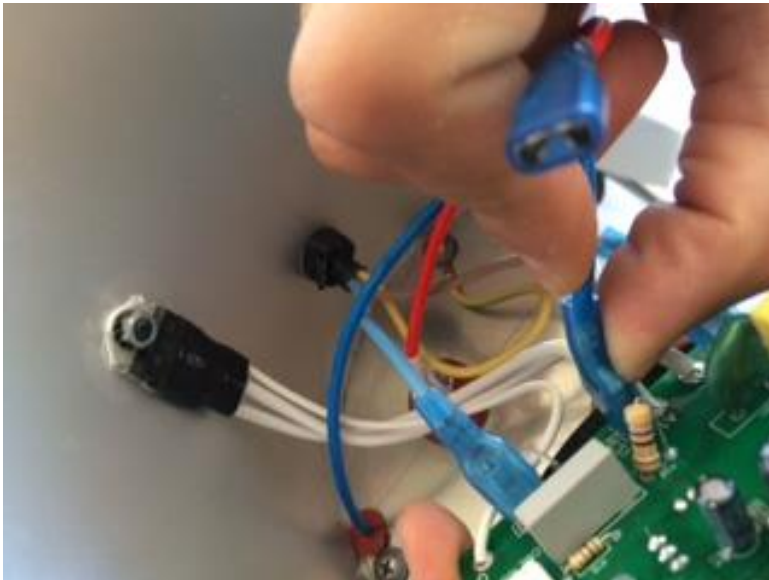


Step3: Disassemble the res1 and res2 (blue and red cable) sockets



Step 4: Remove the screw



Step 5: Dismount silicone stopper on the cable

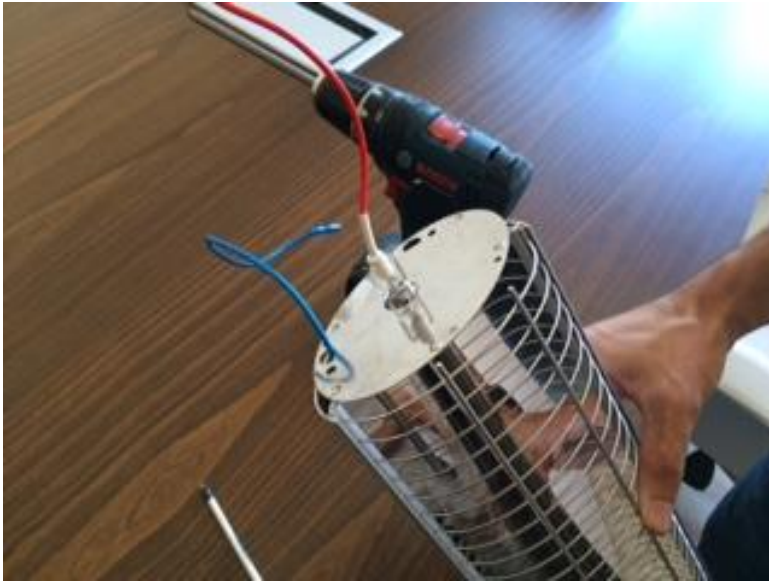


Step 6: Disassemble head parts




Step 7: Dismount grille

Step 8: Dismount the carbon filament

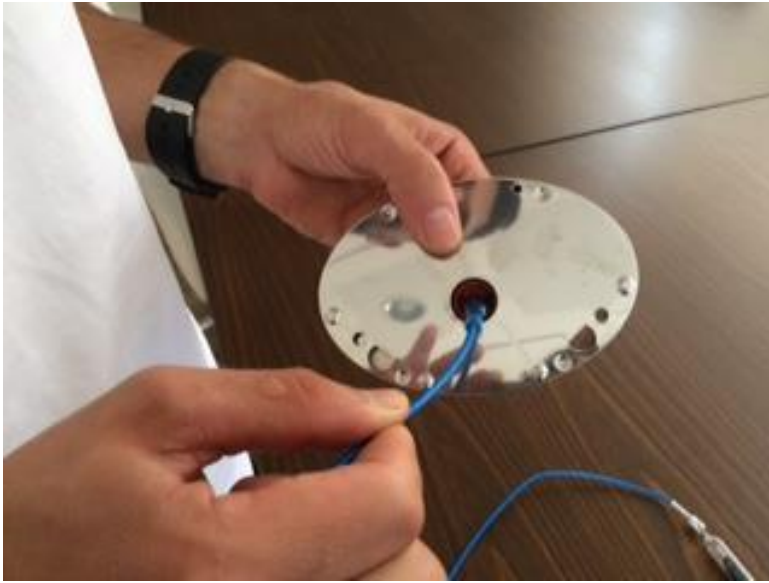

Step 9: Pass through cable inside silicone stopper

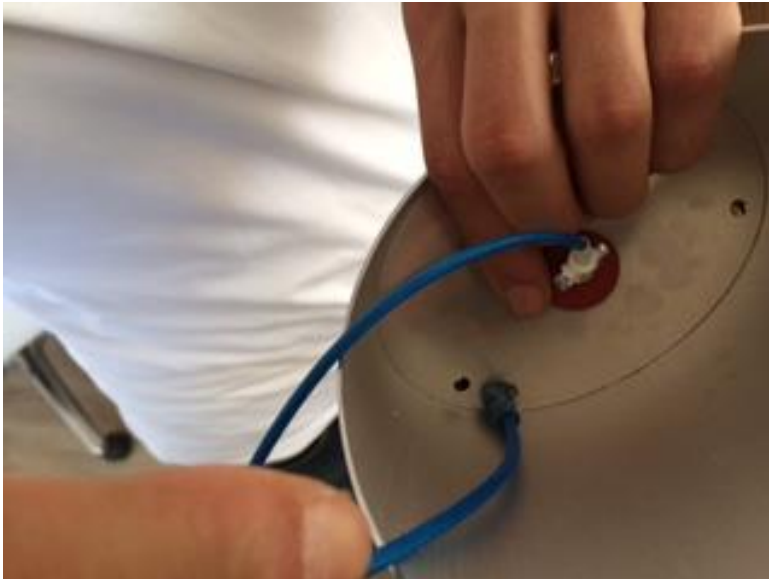

Step 10 : Pass through cable inside cable hole



Step 11: Pass through cable inside main body

Step 12: to mounting other parts do steps backward (step 7-1)