

PRC007 Suspended-Ceiling-Coating

Technical & Specification Data Sheet

Supplied By :

Procoat UK Ltd- CeilCote
26 Fenlake Business Centre
Fengate
Peterborough
PE1 5BQ

Tel :01733 558251

Email : info@ceilcote.com

Website: www.ceilcote.com



Of Service Excellence





PRC007 Suspended-Ceiling-Coating

Product Description:

The ultimate mineral fibre acoustic suspended ceiling restoration coating. Designed to be spray applied with the ceiling tiles and grid in situ. PRC007 is water based and will not stick the tiles together or to the grid system. Acoustic properties are maintained and the non-yellowing formula will last as long as a brand new suspended ceiling. PRC007 will replicate the existing textures or pattern of the acoustic ceiling tiles and gives a uniform even appearance across the whole suspended ceiling. Water based , low odour and available in any Ral or BS4800 colour. PRC007 Suspended-Ceiling-Coating has been specified and used to restore vast amounts of acoustical suspended ceilings over the past 20 years.

- Intended for commercial premises such as offices, supermarkets, airports, hotels, Schools and hospitals.

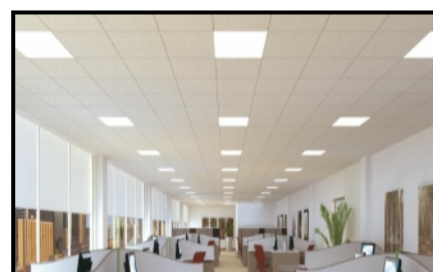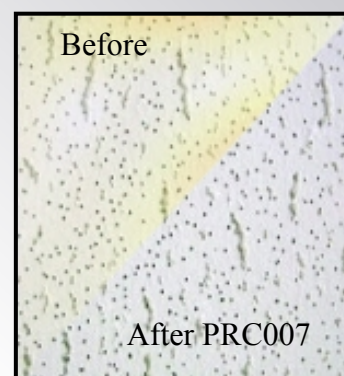

Performance Properties:

- Acoustic performance retained - No clogging of acoustic fissures
- Grids and tiles coated in situ at the same time
- Non bridging - Tiles will not stick to the grid support system
- Non yellowing - Lasts as long as a new ceiling
- Aftercare and maintenance is the same as a new ceiling
- Designed for airless spray application for fast results
- Covers heavy stains
- Water based
- Low odour / No residual odour
- Consistent colour / High opacity
- Will not warp tiles
- Available in RAL and BS Colours

Specification :

Adhere CeilCote 50mm x 50m differential double sided adhesive tape around the perimeter of the upper walls as close to the suspended ceiling as possible. Hang CeilCote 250m x 5m polythene sheeting from the double sided tape to protect and encapsulate the work area. Use the same sheeting to protect workspace items such as desks, computers, chairs, cabinets, stock, chillers, gondolas and checkouts. Use static brushes or a vacuum to remove ceiling dust and loose surface dirt. Precision mask ceiling fixtures such as light fittings, vents and fire sprinklers ect. Pre treat water stains with Ceilblock aerosol sealer. Remove any surface contaminants from grid supports like grease, oil, dirt wax with CeilCote hard surface cleaner.

- Apply PRC007 Suspended-ceiling -coating by airless spray. One full coat in each direction.
- Heavy textured suspended ceilings tiles may require further applications in the opposite directions.

Application :

PRC007 Suspended-Ceiling-Coating is ready to use no dilution is normally required. Mechanically shake or stir thoroughly before using.

- Airless Spraying : 0.013 “ to 0.017” tip at 2000 to 2500 P.S.I 50 % overlap each pass.
- Thinning if required : up to 5% water
- Temp: 10 up to 32c air and surface temperature

Personel Protective equipments:

Respirator organic vapour / dust mask. CE approved EN140:1996. Overalls, Goggles, Gloves

Clean up : Clean up spills and drips with a wet cloth/ sponge. Wash tools in warm soapy water

Disposal : Dispose of unused or unwanted product in accordance with local laws regulating water-based coatings.

Technical Data: **PRC007 Suspended-Ceiling-Coating**

Appearance: Liquid
Odour: Slight Odour
Coverage: 10m² Per litre by airless spray application
Touch Dry : 30 Minutes
Colour: White 00E55 can be tinted to RAL colours
Sheen Level: Matt
Miscibility with water: Fully miscible
Solids : 40.1 %
Container Size: 20 Litres
Container Weight: 30 KG
Storage: Indoors, Above Freezing

**Contact:**

Procoat UK Ltd- CeilCote
26 Fenlake Business Centre
Fengate
Peterborough
PE1 5BQ
Tel: 01733 558251
Fax: 01733 891899
Email: info@ceilcote.com
Web: www.ceilcote.com

CEILCOTE[®]
PROCESS