
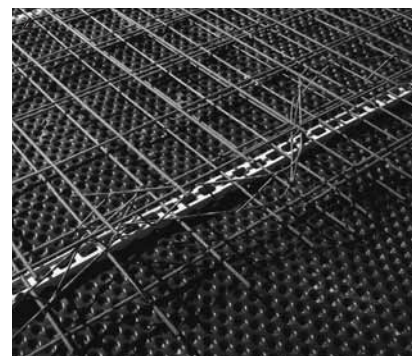


DELTA® protects values. Saves energy. Creates comfort.

DELTA®-MS Sub-Base Course

Installation Instructions

- 1. Simply roll out the DELTA®-MS sub-base course sheets on a level and firm foundation.
- 2. Sheets should overlap no less than 20 cm along all edges. To minimise overlap losses, we recommend using rolls that are as wide as possible.
- 3. Strip-shaped spacers must be used to support the reinforcement mesh from below.
- 4. Spacers suitable for fair-faced concrete must be placed on the lower mesh to keep the upper and the lower reinforcements apart.

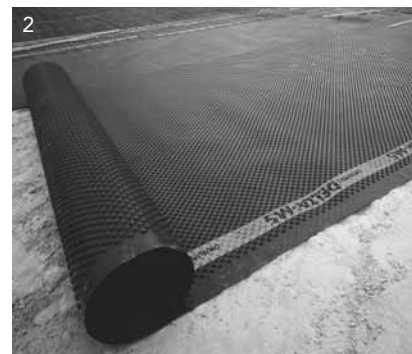

STANDARD QUALITY

■ Protection system

■ For construction and civil engineering

■ For horizontal applications

Fax: +44 (0)20 31 22 31 22

DELTA MEMBRANE SYSTEMS LTD.
Delta House, Merlin Way
North Weald, Epping,
Essex CM16 6HR

Request for tender: DELTA®-MS sub-base course

Item No.	Qty.	Specifications	Price/unit	Price total
1 m²	DELTA®-MS sub-base course (made by Dörken GmbH & Co. KG, D-58313 Herdecke, Germany) featuring 1,800 dimples/m² min. and a compressive strength of 250 kN/m² approx.; certified suitable for use as an enduring sub-base course to be laid out on level and firm ground and covered by a reinforced concrete slab. Overlaps should be no less than 20 cm wide. The lower reinforcement mesh must be supported by spacer strips. Spacers suitable for fair-faced concrete should be placed on the lower mesh to keep the upper and lower reinforcement meshes apart.		