

Premier Vision Dual

1100-3000VA

Single-phase input

Single-phase output

Uninterruptible Power Supply

Main Features

- Line-Interactive technology with AVR and filters
- Sinewave output
- Automatic battery test
- Cold start
- Auto re-start
- Superb battery management
- 50 or 60Hz operation
- Audible/visual alarms
- RS-232 & USB ports
- SNMP network card option
- Free software



Tel: +44 (0)1920 871077

Fax: +44 (0)1920 871337

Email: sales@cetronicpower.com

Your satisfaction is our motivation

www.cetronicpower.com

SPECIFICATIONS

MODEL	PVD 1100	PVD 1500	PVD 2200	PVD 2200ER	PVD 3000	PVD 3000ER
Rated power (VA)	1100	1500	2200	2200	3000	3000
Power (W)	990	1350	1980	1760	2700	2400

INPUT

Nominal voltage	220-230-240 Vac
Voltage tolerance	162 – 290 Vac
Frequency	50 – 60Hz
Frequency tolerance	± 5%
Power Factor	>0.98

BATTERIES

Type	Sealed lead acid
Charging time	2-4 hours


OUTPUT

Nominal volatage	220-230-240Vac selectable
Voltage distortion	linear load < 3% / non-linear load ,<8%
Frequency	50 – 60 Hz with automatic selection
Waveform	Sinusoidal

ADDITIONAL INFO

Weight	17	18	28	16	32	17
Dimensions (hwd) (mm)	425x87x450 (2Ux19"425)			625x87x450 (2Ux19"x625)		
Communication	USB / DB9 with RS232 and contacts / slot for communications interface					
Regulations	EN 62040-1 and Directive 2006/95/EL EN 62040-2 category C2 and Directive 2004/108 EL					
Ambient temperature	0°C / +40°C					
Colour	Black					
Relative humidity	<95% non-condensing					
Noise level	< 40 dBA					

Specifications subject to change without any prior notice.

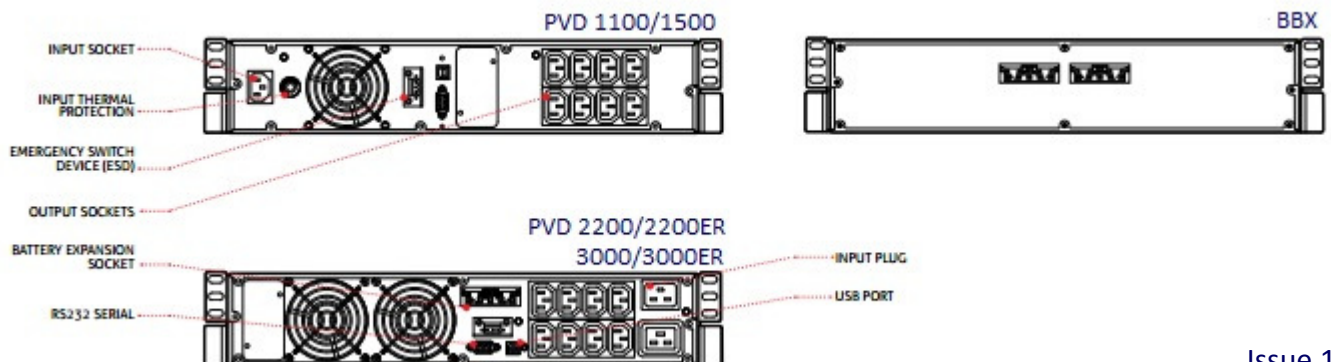

Issue 10/15



Tel: +44 (0)1920 871077
 Fax: +44 (0)1920 871337
 Email: sales@cetronicpower.com



Your satisfaction is our motivation
www.cetronicpower.com