

ComColorExpress RS 1100C



The smart approach to transactional printing


RIP software for transactional printing on your ComColor printers that simplifies and streamlines your workflow, bringing high productivity to every business environment.



Adobe PostScript


Queue settings that make your printing operations easier

By creating queues for frequently used print settings, you can streamline your printing operations. Hot Folders are also supported.

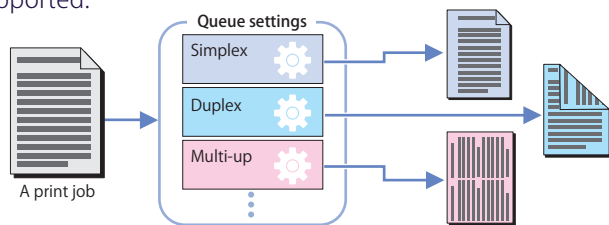


Tray selection per page that enables mixed paper types in one print job

By specifying the feed tray for each individual page, you can use different types of paper for particular pages.




Slip sheets that facilitate sorting

Slip sheets (such as colored paper) can be inserted between separate prints at specified intervals, even when multiple jobs are printed continuously. By using slip sheets, you can reduce the amount of sorting work required for large-volume printing.




Support for subsets that allow more advanced print settings

Print with your chosen settings by dividing a print job into multiple subsets and configuring individual print settings on each subset. For example, you can perform mixplex printing that mixes simplex printing with duplex printing, or perform stapling or hole-punching for only part of a job.

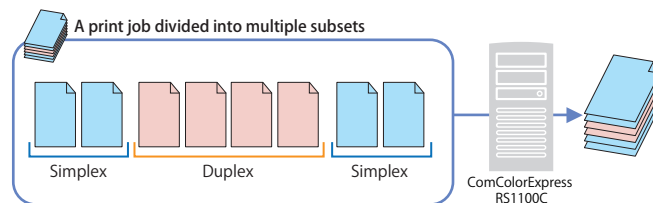

Form overlay that simplifies variable data processing

Variable data can be overlaid onto previously registered forms and printed. This eliminates the need to prepare preprinted paper, enabling you to reduce costs and improve efficiency.

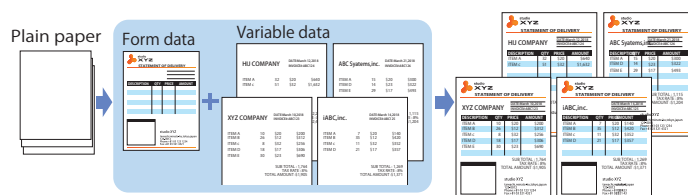

Color profile registration

You can register color profiles that were created for specific types of paper or intended uses.

Main Functions

Layout	Duplex, Image rotation, Mixed output size, Zoom, Imposition, Binding margin setting, Creep compensation
Tray	Input tray selection, Tray selection per page, Paper type selection, Output tray selection*, Output face selection*, Continuous output*, Collate, Reverse order printing, Slip sheet
Finishing	Finishing side selection*, Staple mode*, Punch mode*, Booklet fold mode*, Fold mode*, Offset output pages*, Header page printing
Image	Color output mode, Resolution setting, Original type selection, Screening setting, Draft, Envelope processing, Line smoothing, Print density adjustment, Gamma control
Form	Form overlay, Prepend/append form

* When optional accessories are connected to ComColor printer.

Annotation	Annotation, Start number setting, Print start page setting, Insert page number, Insert total pages, Transparency, Font, Font size, Font information insertion
Shifting	Image shift, Print position
Workflow	Destination selection, Queue selection, Queue code (1-8 digits), Print and hold, Job name input, Owner name input, Secure print, Print and pause, Job splitting, Send E-mail (job status notification), Comment input, Slow printing
Color	Setting color profiles, Pure black, Maximum number of ink drops setting, Rendering intent selection
Console	Message/Status display, Job manager, Viewing/Editing job details, Checking printer status, Detailed settings of RIP, Managing custom queue, Color calibration, Font management, Reports (system events log, accounting information), Rebooting/shutting down

Specifications and Requirements

ComColorExpress RS1100C specifications

Compatible printer	ComColor FW Series
PDL	PostScript 3 (CPSI:3019)*, PDF (1.7), PCL 5c, PCL 6 (PCL XL), TIFF (6.0), PPML (2.1) *Genuine Adobe engine
Applicable protocol	TCP/IP, HTTP, HTTPS (SSL), DHCP, FTP, SMB, NetBIOS, AppleTalk, LPR, IPP, Port 9100 (RAW port), IPv4, IPv6, IPsec
Installed font	PS: 139 fonts (Type 1: 120, TrueType: 19) PCL: 80 fonts

System requirements for RIP software

The computer in which the RIP software is installed must be dedicated to RIP operation.

Operating system	Windows® 10 Home/Pro (64-bit)
CPU	Intel® Core™ i3-8100 3.6 GHz or faster
Memory	8 GB or greater
Hard disk	501 GB or greater of free space
Network interface	2 ports (Ethernet: 1000BASE-T) 1st port: For sending and receiving data to/from a client computer 2nd port: For sending and receiving data to/from ComColor
USB port	2 ports For dongle connection: 1 port (USB 3.0 or later) For software update: 1 port (USB 2.0 or later)

Supported OS for printer driver and RISO Management Tool

Operating system (Client computer)	Windows: Windows 7 (32-bit/64-bit) SP1 or later, Windows 8.1 (32-bit/64-bit), Windows 10 (32-bit/64-bit), Windows Server® 2008 (32-bit/64-bit) SP2 or later, Windows Server 2008 R2 (64-bit) SP2 or later, Windows Server 2012 (64-bit), Windows Server 2012 R2 (64-bit), Windows Server 2016 (64-bit) Mac OS: v10.8 (Mountain Lion), v10.9 (Mavericks), v10.10 (Yosemite), v10.11 (El Capitan), v10.12 (Sierra), v10.13 (High Sierra) Linux® Only the operations using the PPD with the CUPS are supported.
------------------------------------	--

ComColor series printers offer ultimate speed and efficiency.

With print speeds at up to 120 ppm and excellent durability, ComColor FW series brings a new level of productivity. Because of RISO's cold, flat and dry output, printed pages can move directly to finishing processes, vastly reducing production times.



® RISO and ComColorExpress are trademarks or registered trademarks of RISO KAGAKU CORPORATION in the United States and other countries. Adobe, PostScript 3 and the PostScript logo are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States and/or other countries. Mac and AppleTalk are trademarks of Apple Inc. Windows and Windows Server are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. Intel and Intel Core are trademarks of Intel Corporation or its subsidiaries in the U.S. and/or other countries. Linux is the registered trademark of Linus Torvalds in the U.S. and other countries. Other corporate names and/or trademarks are either registered trademarks or trademarks of each company, respectively.

For more details please contact:



RISO, Inc.
800 District Avenue, Suite 390 Burlington, MA 01803-5063
<http://us.riso.com>