

AS0260 - Dual Channel ROLI

Pulse or DTMF Dialling

Ruggedised Enclosure

Mains or Battery Powered


Description

The Dual Channel ROLI converts two standard 4W E&M ports from a multiplexer to simple telephone connections.

The unit provides power connections for 120 - 265Vac via an IEC lead or by 24V vehicle battery via two 4mm connectors.

Connections to the telephone instrument are either through the integral BT631A connector or via the A/B 4mm binding posts.

RJ45 cables can be provided for connection to various multiplexers.

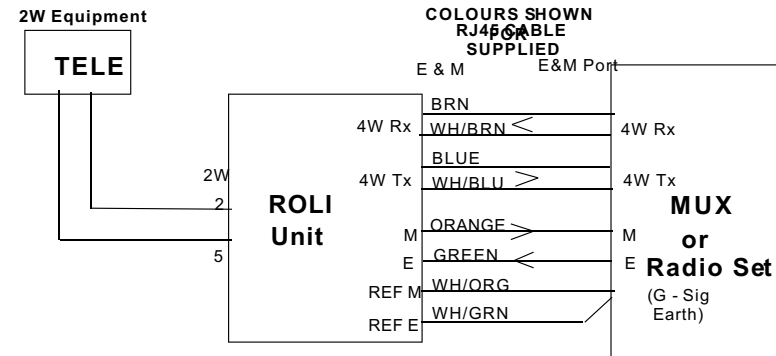

Technical

120 - 265Vac or 24Vdc Powered
RJ45 for E&M (DC5) Connection
BT631A for 2W Telephone Connection
Audio preset to -3dB for Tx & Rx

Weight - 1500g
Size - 250 x 125 x 95 mm

Alistair Douglas
10/12/03

OFFICE/DATA/DATASHEETS/AS0260 - DUAL ROLI DATA SHT

Keltel Comms Ltd
Thistle House, Union St, Kelso, Scotland, TD5 7DR
Tel : +44 (0) 1573 228955 Fax : +44 (0) 1573 228951
Email : sales@keltel.co.uk Web : www.keltel.co.uk