



MODEL# RH-200-SS

- STAINLESS STEEL HOUSING
- STAINLESS STEEL HEATER ELEMENT
- STAINLESS STEEL INLET, AND OUTLET TUBES
- COMPATIBLE WITH RO SYSTEM

Dimensions

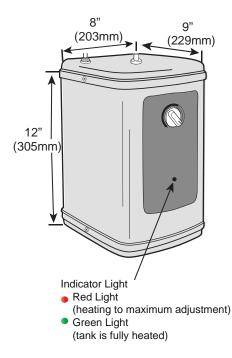



Designer Faucets Available. Sold Separately. ©2013 Joneca Corporation, All Rights Reserved



Anaheim, California 92807 Telephone: 714.993.1707 Fax: 714.993.1930 Website: www.AnaheimMarketing.com Email: ContactUs@AnaheimMarketing.com

INSTALLATION:	Easy to install quick-connect fittings and convenient connections reduce probability of kinked or twisted water lines.	
CONSISTENT PERFORMANCE:	1300 WATT HEATING allows fast recovery time. A large 2.5 quarts (2.4L) reservoir delivers a generous 60+ cups per hour capacity.	
RELIABLE PERFORMANCE:	Due to the high temperature of the water, the tank is not under pressure. Our self-contained expansion chamber reduces dripping.	
FINGERTIP ADJUSTMENT:	200° F (93°C) hot water at your fingertips adjusts from 140° F (60°C)) to 200° F (93°C). Great for cooking, instant coffee, tea or use in a wet bar.	
AUTOMATED HEATER PROTECTION:	R Self re-setting thermal fuse protects the product in the event of a dry start up.	
ENERGY EFFICIENT:	Uses less electricity than a 40 watt light bulb. Comes with installed power cord.	
WARRANTY:	3 Years Canada and USA	

Specifications

Watts	1300		
Voltage	120V	220V	
Current-Amps	10.8	5.9	
Hz	50/60Hz		
Tank	Insulated stainless steel		
Capacity	2.5 Quarts (2.4L) 60+ Cups Per Hour		
Temperature Range	Adjustable from 140°F (60°C) to 200°F (93°C)		
Outside Case	Stainless steel		
Drain Plug	Removable		
Faucet	Open vent faucet required (Supplied Separately)		
Water Connections	Quick connect		
Weight	1 RH-200-SS w/o faucet Shipping 12 lbs. (5.45 Kg)		

Due to continued product improvement, system configurations and specifications may change without notice.

