



INFRARED CAMERAS

The most portable infrared online cameras in the world

innovative infrared technology

Important features of the Optris infrared cameras



Special advantages

- Temperature ranges from $-20\text{ }^{\circ}\text{C}$ to $2000\text{ }^{\circ}\text{C}$
- Small cameras ideal for OEM use
- Up to 1 kHz for fast processing
- Optical resolution up to 764 x 480 pixels
- Includes license-free analysis software and full SDK for Windows and Linux

Made in Germany



2 years
warranty

Fast measurements

Temperature distributions on a surface can be precisely recorded at **millisecond intervals**.

Automatic hotspot search

Objects can be thermally analyzed and **hot or cold spots** can be found automatically.

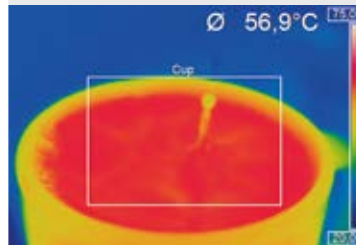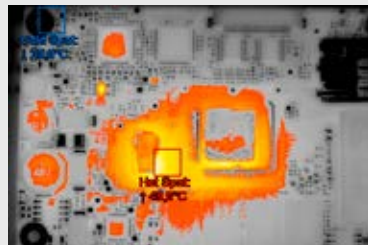


A drop of milk falling into a cup of coffee

Portable and stationary

The cameras bridge the existing gap between portable infrared snapshot cameras and purely stationary devices.


Examples of areas of application are:

- **Process automation**
- **Test stations**
- **Research & development**
- **Mobile measuring tasks**

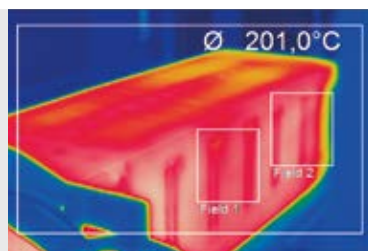

Simple process integration

Advanced interface concepts enable integration into networks and automated systems:

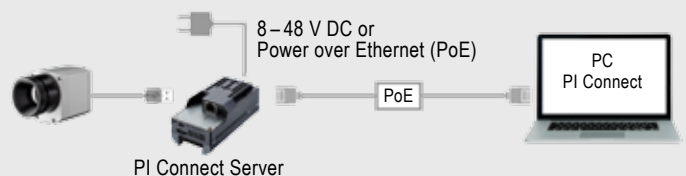

- USB cable extension up to 100 m (over Ethernet)
- Industrial Process Interface (PIF) with two analogue inputs, one digital input and over three analogue outputs/alarm outputs with three isolated relays (0 – 30 V / 400 mA); additional fail-safe relay.
- Software Development Kit (SDK) for integration of the camera into customer-specific software via Dynamiclink Library (DLL) or COM-Port.


**Small camera
ideal for OEM
use**

- Outstanding value for money
- Very good thermal sensitivity of 80 mK
- Thermal image up to 120 Hz
- Detector with 160 x 120 pixels
- Compact design (dimensions: 45 x 45 x 62 mm)
- Includes license-free analysis software and full SDK





Surface measurements in industrial application

The optris® PI 160 infrared camera is always used when temperature monitoring of surfaces is required and the single point measurement of pyrometers is no longer sufficient.

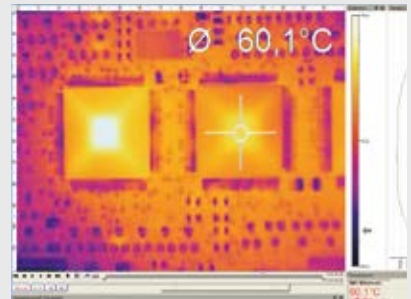

Nowadays surface measurements are essential in the automotive field, in plastic applications and in the solar industry.

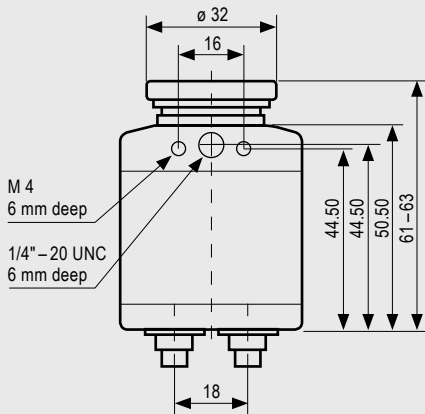

Dimensions in mm


Suitable lenses for every measurement distance

Same measurement field size at different measurement distances:

- Telephoto lens:
2.13 m measurement distance
- Standard lens:
0.6 m measurement distance
- Wide-angle lens (41°):
0.32 m measurement distance
- Wide-angle lens (72°):
0.17 m measurement distance

Hand as measurement object:
measurement field size 240 mm x 180 mm
pixel size 1.5 mm

160 x 120 pixels

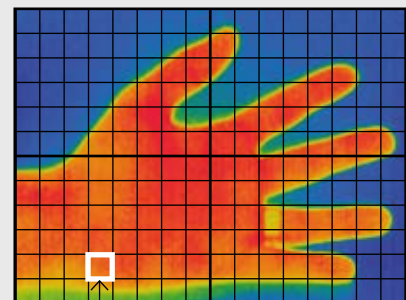


10 x 10 pixels = 225 mm²

optris® PI 200 / PI 230

INFRARED CAMERA

WITH BI-SPECTRAL TECHNOLOGY

Two cameras in one compact device

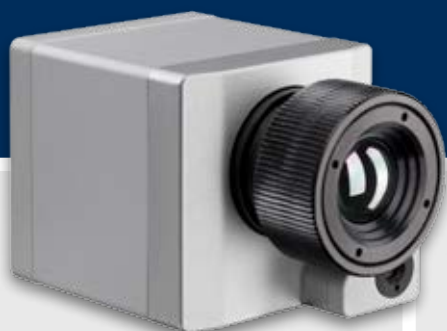

- BI-SPECTRAL Technology
- Time-synchronized visual image recording at up to 32 Hz (640 x 480 pixels)
- Real image camera is highly sensitive in low-light conditions
- Thermal images to 128 Hz (160 x 120 pixels)
- Compact design (dimensions: 45 x 45 x 62 mm)
- Includes license-free analysis software and full SDK

BI-SPECTRAL Technology



With the help of BI-SPECTRAL technology a **visual image (VIS)** can be combined with a **thermal image (IR)** and plotted synchronistically:

Surveillance mode:


Easy orientation at the measuring point through separate display of the visual picture.

Crossfade mode:


Highlight critical temperatures by means of crossfade (transparency from 0 to 100 %) or by means of superimposition of defined temperature fields (thresholds).

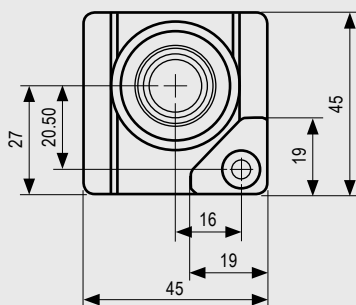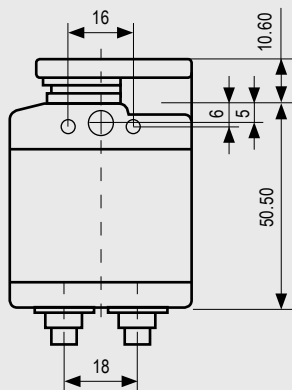


Dimensions in mm

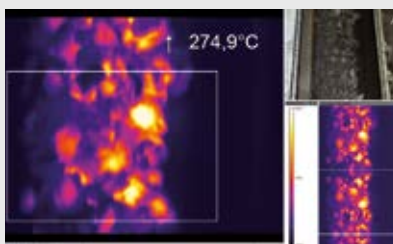

Monitoring of a carbon ribbon

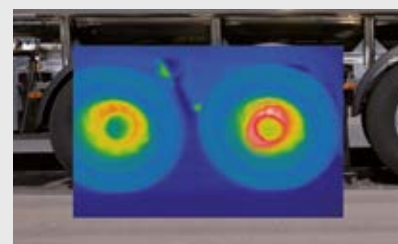

Measurement of the brake temperature in superimposed picture

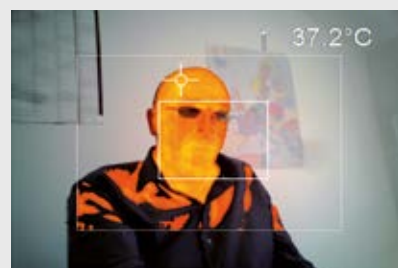

Cross-fade of a VIS image above 35 °C

INFRARED CAMERA
WITH HIGH OPTICAL RESOLUTION



The smallest
camera in
its class

- The smallest camera in its class (46 x 56 x 90 mm)
- Very good thermal sensitivity at 80 mK
- Thermal image recording up to 80 Hz
- Interchangeable lenses & industrial accessories
- Lightweight (320 g incl. lens)
- Detector with 382 x 288 pixels
- Includes license-free analysis software and full SDK






High-performance for
a wide range of uses

The high-performance optris® PI 400 infrared camera has a wide range of uses in industry. For example, thermal image shots help to monitor processes and ensure the quality of manufactured products in the automotive field in particular, in the manufacturing of plastics as well as in the semiconductor and photovoltaic industry.

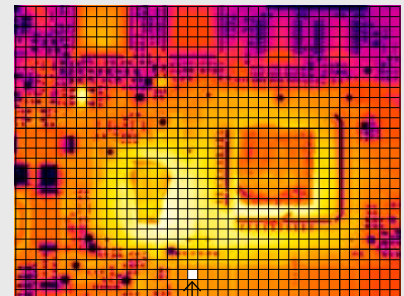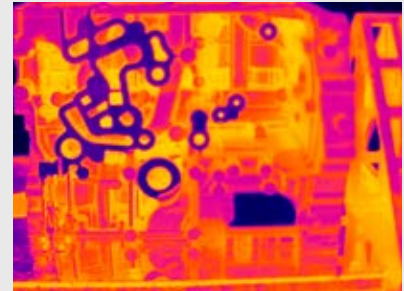

382 x 288 pixels | 10 x 10 pixels = 40 mm²


SMD chip as measurement object:
measurement field size: 240 mm x 180 mm,
pixel size: 0.63 mm

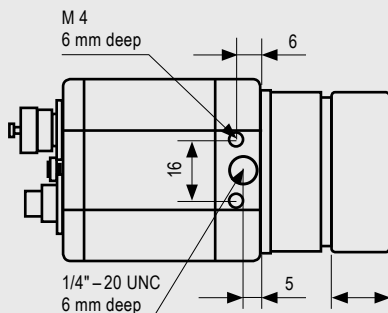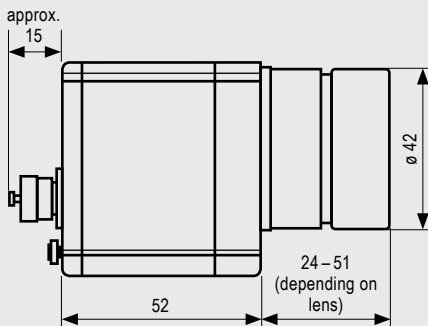

Dimensions in mm

80 Hz recordings with
full pixel resolution

The display and recording of thermal images at full optical resolution can be done at high measurement speeds of 80 frames per second.

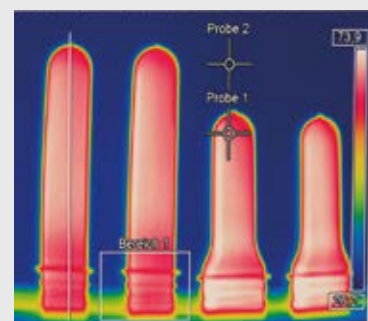

Thermal image shots of preforms
in PET bottle production

optris® PI 450

INFRARED CAMERA

WITH VERY HIGH OPTICAL RESOLUTION





Detection of minimal temperature differences

- The smallest camera in its class (46 x 56 x 90 mm)
- Exceptional thermal sensitivity at 40 mK
- Thermal image recording up to 80 Hz
- Interchangeable lenses & industrial accessories
- Lightweight (320 g incl. lens)
- Detector with 382 x 288 pixels
- Usable at ambient temperatures of up to 70 °C without the need for additional cooling
- Includes license-free analysis software and full SDK



Highest temperature resolution of 40 mK



With an optical resolution of 40 mK, the optris® PI 450 is used for measuring the most subtle temperature differences, e.g. in the quality control of products or in preventive medicine.

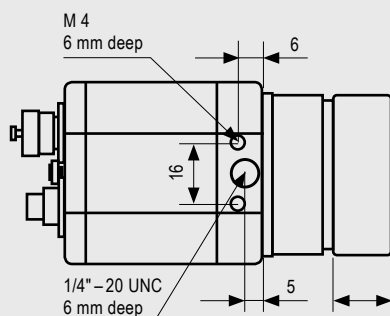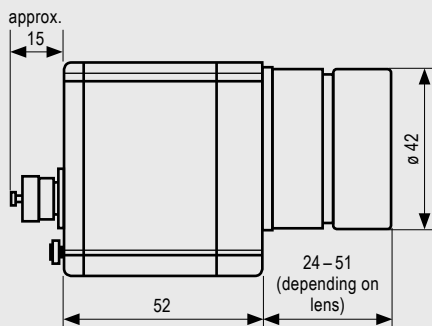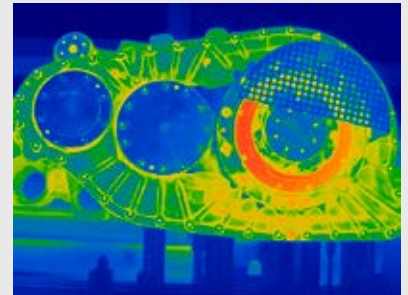

Dimensions in mm






Application example in the medical sector

Due to the very high temperature resolution of the optris® PI 450, even veins can be made visible under the skin.

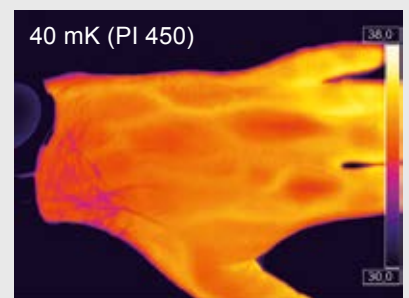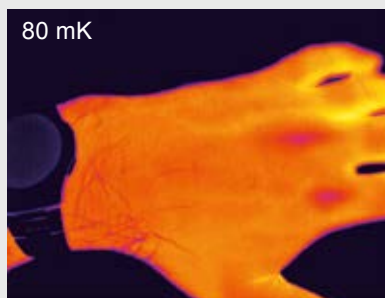

**The smallest
VGA infrared
measurement
camera in the world**

- 640 x 480 pixels
- Radiometric video recording at 32 Hz/125 Hz in subframe-mode (640 x 120 pixels)
- Compact size of 46 x 56 x 90 mm
- Lightweight (320 g incl. lens)
- Includes license-free analysis software and full SDK

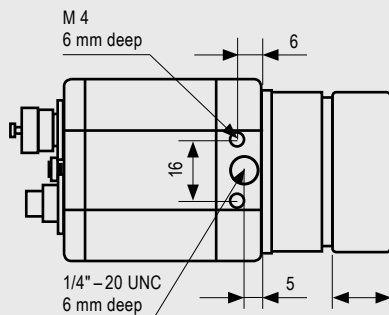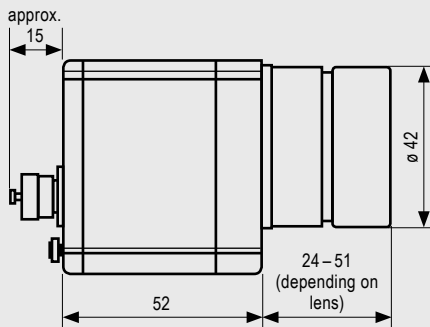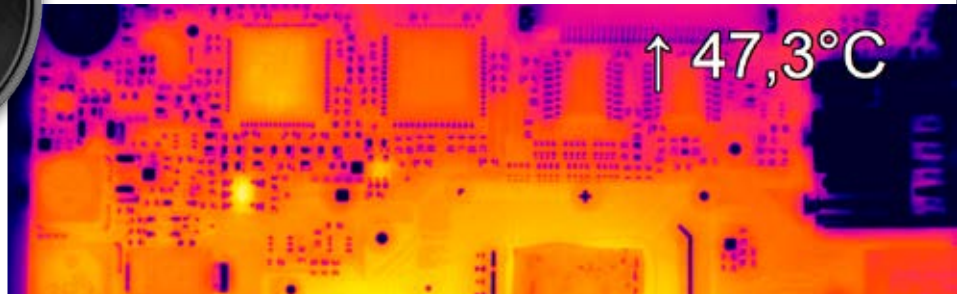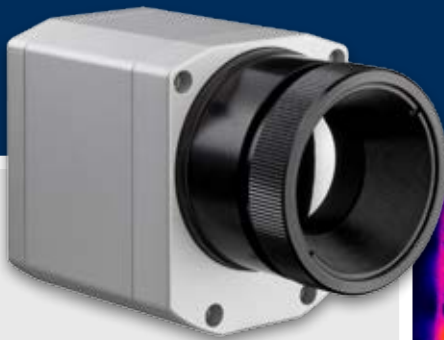



Dimensions in mm

**Razor sharp infrared
pictures and videos for
process optimization**

With a casing size of only 46 x 56 x 90 mm and a weight of 320 grams (incl. lens), the optris® PI 640 is among the most compact infrared cameras on the market.

The high-definition optris® PI 640 infrared camera is best used in applications where finest thermal details matter.

It significantly contributes to process optimization in both research and development and in industry.

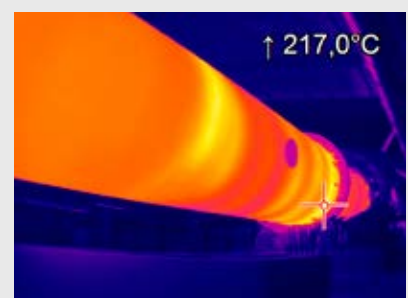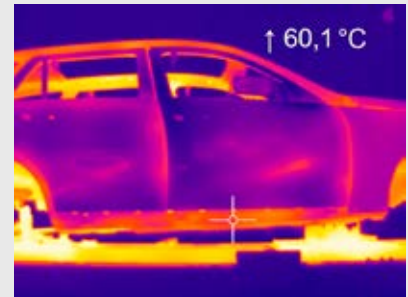

optris® PI 450 / PI 640 G7

INFRARED CAMERAS FOR ANECHOIC
INFRARED SURFACE TEMPERATURE
MEASUREMENTS ON GLASS

High-resolution thermography solution for the glass industry




- Usable at ambient temperatures of up to 70 °C without the need for additional cooling
- With an integrated filter for the spectral range of 7.9 µm
- Compact size of 46 x 56 x 90 mm
- Frame rate up to 125 Hz
- Line scan function through license-free analysis software optris® PI connect
- Max. scan angle of 111 °C with 800 pixels per line




Exact temperature measurements on glass surfaces via line-scan camera function

The temperature of glass is best measured in the range of spectral absorption bands. For this purpose the optris® PI 450/PI 640 G7 has an integrated 7.9 µm filter which enables an anechoic IR surface temperature measurement. Its compact size makes the optris® PI 450/PI 640 G7 particularly suitable for use in confined spaces and for installation in industrial facilities. The infrared camera is fully operational at ambient temperatures of up to 70 °C without the need for cooling. With an imaging frequency of up to 125 Hz, glass products can be continuously tested, even in fast processing.


The line-scan camera function (linescan mode) of the PI Connect software enables the exact temperature measurement of panes of glass during transport on conveyor belts. This is a particularly important quality factor in tempering processes, e.g. in ESG and VSG.

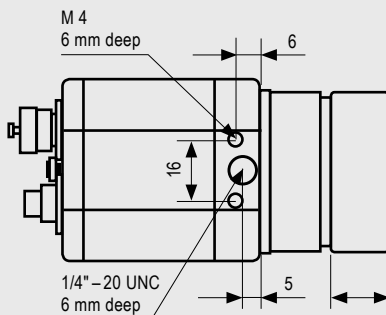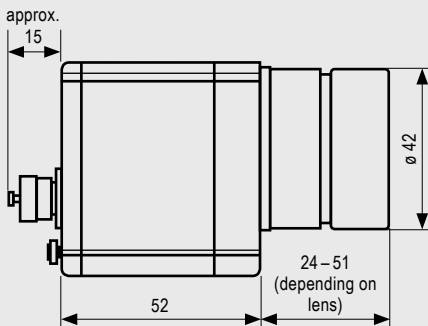


Dimensions in mm

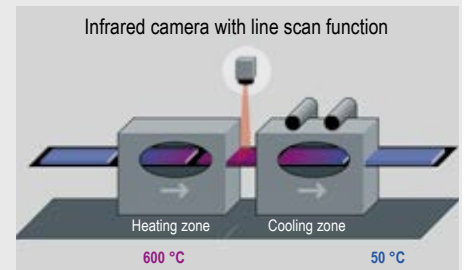

Construction of a glass tempering plant

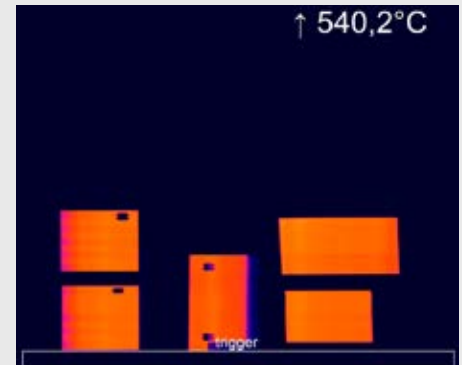

Glass panes between heating and cooling zone

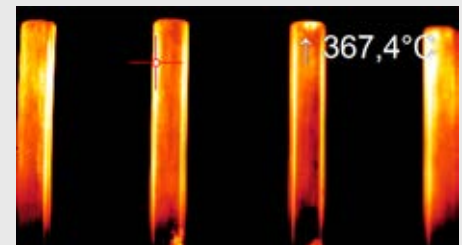

Glass tube manufacturing



Hot-spot measurement in the production of glass bottles

**Ultra compact
infrared cameras for
the metal industry**

- Highly dynamic CMOS detector with an optical resolution of up to 764 x 480 pixels
- Very large temperature measurement ranges (without sub-ranges) of 450 °C to 1800 °C (PI 1M) and of 900 °C to 2000 °C (PI 05M)
- Frame rates and linescanning function up to 1 kHz for fast processes
- Real-time output of 8x8 pixels with 1 ms response time
- Includes license-free analysis software and full SDK
- New: PI 05M - Ideally suited for all laser processing applications with solid-state lasers in NIR through excellent blocking of radiation above 540 nm






**Intelligent temperature
measurement – innovative
and fast**

The new optris® PI 05M and PI 1M IR cameras are specially suited for measuring the temperature of metals, as these exhibit a distinctly higher emissivity at the short measurement wavelength of 500 nm and 1µm than at measurements in the previously conventional wavelength range of 8–14 µm.

Especially the new spectral range of 500 nm enables for more precise measurements at changing emissivities and is less sensitive to atmospheric influences. Thus, the PI 05M is ideally suited for temperature measurements of molten metals. A direct 1 ms analog output allows both camera models a readout of a freely selectable 8x8 pixel region in real-time.

The use of these new image sensors allows a large dynamic range for temperature measurement so that the previously necessary use of relatively many and narrowly defined sub-ranges is no longer required. Intelligent measuring with a pyrometer is now possible thanks to the two-dimensional temperature recording of the optris® PI 05M and PI 1M.


Thanks to the large measurement temperature range of 450–2000 °C, the optris® PI 05M and PI 1M IR camera satisfies practically all demands in the fields of metal production and processing.

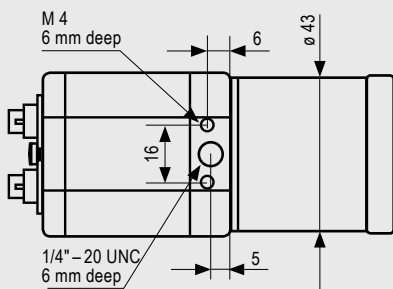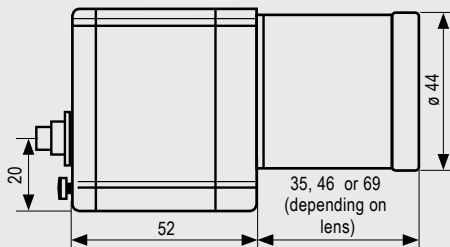


Dimensions in mm




Measurement of pouring stream

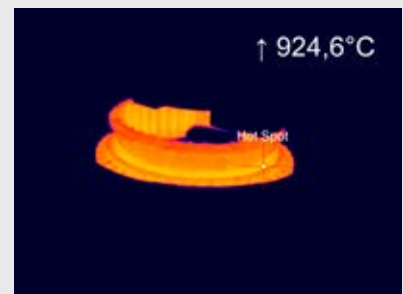

Induction heating

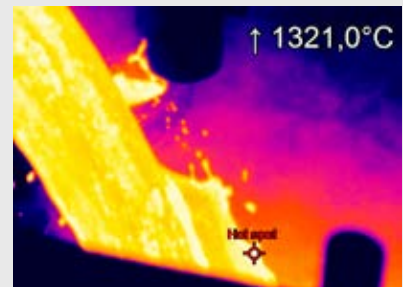

Measurement of pouring stream

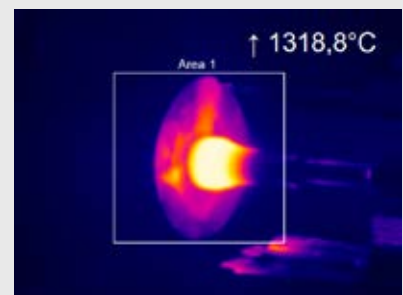

Electrical upsetting

Technical data

Compact infrared cameras for fast online applications, including line scanning



Base Model	PI 160	PI 200 / PI 230	PI 400 / PI 450
Type	IR	BI-SPECTRAL	IR
Detector	FPA, uncooled (25 µm x 25 µm)	FPA, uncooled (25 µm x 25 µm)	FPA, uncooled (25 µm x 25 µm)
Optical resolution	160 x 120 pixel	160 x 120 pixel	382 x 288 pixel
Spectral range	7.5–13 µm	7.5–13 µm	7.5–13 µm
Temperature ranges	–20 °C... 100 °C, 0 °C... 250 °C, (20) 150 °C... 900 °C ³⁾ , 200 °C... 1500 °C (Option) ¹⁾	–20 °C... 100 °C, 0 °C... 250 °C, (20) 150 °C... 900 °C ³⁾ , 200 °C... 1500 °C (Option) ¹⁾	–20 °C... 100 °C, 0 °C... 250 °C, (20) 150 °C... 900 °C ³⁾ , 200 °C... 1500 °C (Option) ¹⁾
Frame rate	120 Hz	128 Hz ⁴⁾	80 Hz / switchable to 27 Hz
Optics (FOV)	23° x 17° / f = 10 mm or 6° x 5° / f = 35.5 mm or 41° x 31° / f = 5.7 mm or 72° x 52° / f = 3.3 mm	23° x 17° ²⁾ / f = 10 mm or 6° x 5° / f = 35.5 mm or 41° x 31° ²⁾ / f = 5.7 mm or 72° x 52° / f = 3.3 mm	29° x 22° / f = 18,7 mm or 13° x 10° / f = 41 mm or 53° x 40° / f = 10,5 mm or 80° x 56° / f = 7.7 mm
Thermal sensitivity (NETD)	0.08 K with 23° x 17° FOV / F = 0.8 0.3 K with 6° x 5° FOV / F = 1.6 0.1 K with 41° x 31° FOV and 72° x 52° FOV / F = 1	0.08 K with 23° x 17° FOV / F = 0.8 0.3 K with 6° x 5° FOV / F = 1.6 0.1 K with 41° x 31° FOV and 72° x 52° FOV / F = 1	PI 400: 0,08 K with 29°, 53°, 80° FOV PI 450: 0,04 K with 29°, 53°, 80° FOV lenses mentioned above: F = 0,8 PI 400: 0,1 K with 13° FOV / F = 1,0 PI 450: 0,06 K with 13° FOV / F = 1,0
Option for visual camera (only for BI-SPECTRAL camera)	–	Optical resolution: 640 x 480 pixel Frame rate: 32 Hz ⁴⁾ Optics (FOV): PI 200: 54° x 40°, PI 230: 30° x 23°	–
Accuracy	±2 °C or ±2 %, whichever is greater	±2 °C or ±2 %, whichever is greater	±2 °C or ±2 %, whichever is greater
PC interface	USB 2.0 / optional USB to GigE (PoE) conversion	USB 2.0 / optional USB to GigE (PoE) conversion	USB 2.0 / optional USB to GigE (PoE) conversion
Process interface (PIF)	Standard PIF: 0–10 V input, digital input (max. 24 V), 0–10 V output Industrial PIF (option): 2 x 0–10 V inputs, digital input (max. 24 V), 3 x 0–10 V outputs, 3 x relay (0–30 V / 400 mA), fail-safe relay	0–10 V input, digital input (max. 24 V), 0–10 V output 2 x 0–10 V inputs, digital input (max. 24 V), 3 x 0–10 V outputs, 3 x relay (0–30 V / 400 mA), fail-safe relay	0–10 V input, digital input (max. 24 V), 0–10 V output 2 x 0–10 V inputs, digital input (max. 24 V), 3 x 0–10 V outputs, 3 x relay (0–30 V / 400 mA), fail-safe relay
Ambient temperature (T _{Amb})	0 °C... 50 °C	0 °C... 50 °C	PI 400: 0 °C... 50 °C / PI 450: 0 °C... 70 °C
Storage temperature	–40 °C... 70 °C	–40 °C... 70 °C	PI 400: –40 °C... 70 °C PI 450: –40 °C... 85 °C
Relative humidity	20–80 %, non-condensing	20–80 %, non-condensing	20–80 %, non-condensing
Dimensions / protection class	45 mm x 45 mm x 62 mm / IP 67 (NEMA 4)	45 mm x 45 mm x 62 mm / IP 67 (NEMA 4)	46 mm x 56 mm x 90 mm / IP 67 (NEMA 4)
Weight	195 g, incl. lens	215 g, incl. lens	320 g, incl. lens
Shock / vibration	Shock: IEC 60068-2-27 (25 g and 50 g) Vibration: IEC 60068-2-6 (sinus-shaped) / IEC 60068-2-64 (broadband noise)	Shock: IEC 60068-2-27 (25 g and 50 g) Vibration: IEC 60068-2-6 (sinus-shaped) / IEC 60068-2-64 (broadband noise)	Shock: IEC 60068-2-27 (25 g and 50 g) Vibration: IEC 60068-2-6 (sinus-shaped) / IEC 60068-2-64 (broadband noise)
Tripod mount	¼-20 UNC	¼-20 UNC	¼-20 UNC
Voltage supply	via USB	via USB	via USB
Scope of supply (standard)	<ul style="list-style-type: none"> • USB camera with 1 lens • USB cable (1 m) • Table-top tripod • PIF cable with connecting terminal strip (1 m) • optris® PI Connect software package • Aluminium case 	<ul style="list-style-type: none"> • USB camera with 1 lens and BI-SPECTRAL technology • USB cable (1 m) • Table-top tripod • Focus tool • PIF cable with connecting terminal strip (1 m) • optris® PI Connect software package • Aluminium case 	<ul style="list-style-type: none"> • USB camera with 1 lens • USB cable (1 m) • Table-top tripod • PIF cable with connecting terminal strip (1 m) • optris® PI Connect software package • Aluminium case (PI400) • Robust hard shell case (PI 450)

¹⁾ Not available for 72° (PI 160 / 2xx), 80° (PI 4xx) and 90° (PI 640) lenses

³⁾ Accuracy statement effective from 150 °C

²⁾ For ideal combination of IR and VIS image, a 41° HFOV lens is recommended (PI 200). For the PI 230, a 23° lens is recommended.



PI 640	PI 450 / PI 640 G7	PI 1M	PI 05M
IR	IR	IR	IR
FPA, uncooled (17 µm x 17 µm)	FPA, uncooled PI 450 G7: 25 µm x 25 µm PI 640 G7: 17 µm x 17 µm	CMOS (15 µm x 15 µm)	CMOS (15 µm x 15 µm)
640 x 480 pixel VGA	PI 450 G7: 382 x 288 pixels PI 640 G7: 640 x 480 pixels	764 x 480 pixels @ 32 Hz 382 x 288 pixels @ 80 Hz (switchable to 27 Hz) 72 x 56 pixels @ 1 kHz 764 x 8 pixels @ 1 kHz (fast linescanning mode)	764 x 480 pixels @ 32 Hz 382 x 288 pixels @ 80 Hz (switchable to 27 Hz) 72 x 56 pixels @ 1 kHz 764 x 8 pixels @ 1 kHz (fast linescanning mode)
7.5 – 13 µm	7.9 µm	0.85 – 1.1 µm	500 nm ... 540 nm
-20 °C ... 100 °C, 0 °C ... 250 °C, (20) 150 °C ... 900 °C ³⁾ , 200 °C ... 1500 °C (Option) ¹⁾	200 °C ... 1500 °C	450 °C ⁵⁾ ... 1800 °C (27 Hz mode) 500 °C ⁵⁾ ... 1800 °C (80 Hz and 32 Hz mode) 600 °C ⁵⁾ ... 1800 °C (1 kHz mode)	900 °C ... 2000 °C (27 Hz mode) 950 °C ... 2000 °C (32 / 80 Hz mode) 1100 °C ... 2000 °C (1 kHz mode)
32 Hz * 125 Hz in sub-frame mode (640x120 pixels)	PI 450 G7: 80 Hz / switchable to 27 Hz PI 640 G7: 32 Hz / 125 Hz in subframe-mode (640x120 pixels)	Up to 1 kHz / 1ms real-time analog output (0 - 10 V) from 8 x 8 pixel (freely selectable)	Up to 1 kHz / 1ms real-time analog output (0 - 10 V) from 8 x 8 pixel (freely selectable)
33° x 25° / f = 18.7 mm or 15° x 11° / f = 41.5 mm or 60° x 45° / f = 10.5 mm or 90° x 64° / f = 7.7 mm	PI 450 G7: 29° x 22° (f = 18.7 mm) 13° x 10° (f = 41 mm) 53° x 40° (f = 10.5 mm) 80° x 56° (f = 7.7 mm) PI 640 G7: 33° x 25° (f = 18.7 mm) 15° x 11° (f = 41.5 mm) 60° x 45° (f = 10.5 mm) 90° x 64° (f = 7.7 mm)	FOV @ 764 x 480 px: 39° x 25° (f = 16 mm) 26° x 16° (f = 25 mm) 13° x 8° (f = 50 mm) 9° x 5° (f = 75 mm) FOV @ 382 x 288 px: 20° x 15° (f = 16 mm) 13° x 10° (f = 25 mm) 7° x 5° (f = 50 mm) 4° x 3° (f = 75 mm)	FOV @ 764 x 480 px: 26° x 16° (f = 25 mm) FOV @ 382 x 288 px: 13° x 10° (f = 25 mm)
75 mK	130 mK	< 1 K (700 °C) < 2 K (1000 °C)	< 2 K (1400 °C) for 27 Hz, 32 Hz, 80 Hz < 2.5 K (1400 °C) for 1 kHz
-	-	-	-
±2 °C or ±2 %, whichever is greater	±2 °C or ±2 %, whichever is greater	±1 % of reading (object temperature <1400 °C)	±1.5 % of reading
USB 2.0 / optional USB to GigE (PoE) conversion	USB 2.0 / optional USB to GigE (PoE) conversion	USB 2.0 / optional USB to GigE (PoE) conversion	USB 2.0 / optional USB to GigE (PoE) conversion
0 – 10 V input, digital input (max. 24 V), 0 – 10 V output	0 – 10 V input, digital input (max. 24 V), 0 – 10 V output	0 – 10 V input, digital input (max. 24 V), 0 – 10 V output	0 – 10 V input, digital input (max. 24 V), 0 – 10 V output
2 x 0 – 10 V inputs, digital input (max. 24 V), 3 x 0 – 10 V outputs, 3 x relay (0 – 30 V / 400 mA), fail-safe relay	2 x 0 – 10 V inputs, digital input (max. 24 V), 3 x 0 – 10 V outputs, 3 x relay (0 – 30 V / 400 mA), fail-safe relay	2 x 0 – 10 V inputs, digital input (max. 24 V), 3 x 0 – 10 V outputs, 3 x relay (0 – 30 V / 400 mA), fail-safe relay	2 x 0 – 10 V inputs, digital input (max. 24 V), 3 x 0 – 10 V outputs, 3 x relay (0 – 30 V / 400 mA), fail-safe relays
0 ... 50 °C	PI 450 G7: 0 °C ... 70 °C / PI 640 G7: 0 °C ... 50 °C	5 °C ... 50 °C	5 °C ... 50 °C
-40 °C ... 70 °C	PI 450 G7: -40 °C ... 85 °C PI 640 G7: -40 °C ... 70 °C	-40 °C ... 70 °C	-40 °C ... 70 °C
20 – 80 %, non-condensing	20 – 80 %, non-condensing	20 – 80 %, non-condensing	20 – 80 %, non-condensing
46 mm x 56 mm x 90 mm / IP 67 (NEMA 4)	46 mm x 56 mm x 90 mm / IP 67 (NEMA 4)	46 mm x 50 mm x 90 mm / IP 67 (NEMA 4) ⁶⁾	46 mm x 56 mm x 90 mm / IP 67 (NEMA 4) ⁶⁾
320 g, incl. lens	320 g, incl. lens	320 g, incl. lens	320 g, incl. lens
Shock: IEC 60068-2-27 (25 g and 50 g) Vibration: IEC 60068-2-6 (sinus-shaped)/ IEC 60068-2-64 (broadband noise)	Shock: IEC 60068-2-27 (25 g and 50 g) Vibration: IEC 60068-2-6 (sinus-shaped)/ IEC 60068-2-64 (broadband noise)	Shock: IEC 60068-2-27 (25 g and 50 g) Vibration: IEC 60068-2-6 (sinus-shaped)/ IEC 60068-2-64 (broadband noise)	Shock: IEC 60068-2-27 (25 g and 50 g) Vibration: IEC 60068-2-6 (sinus-shaped)/ IEC 60068-2-64 (broadband noise)
¼ - 20 UNC	¼ - 20 UNC	¼ - 20 UNC	¼ - 20 UNC
via USB	via USB	via USB	via USB
<ul style="list-style-type: none"> • USB camera with 1 lens • USB cable (1 m) • Table-top tripod • PIF cable with connecting terminal strip (1 m) • optris® PI Connect software package • Robust hard shell case 	<ul style="list-style-type: none"> • USB camera with 1 lens • USB cable (1 m) • Table-top tripod • PIF cable with connecting terminal strip (1 m) • optris® PI Connect software package • Robust hard shell case 	<ul style="list-style-type: none"> • USB camera with 1 lens • Lens cap incl. protective window • USB cable (1 m) • Table-top tripod • PIF cable with connecting terminal strip (1 m) • optris® PI Connect software package • Aluminium case • Optional: CoolingJacket, high temperature cable 	<ul style="list-style-type: none"> • USB camera with 1 lens • lens protection tube incl. protective window • USB cable (1 m) • Table tripod • PIF cable (1 m) incl. terminal block • Software package optris® PI Connect • Aluminium case • Optional: CoolingJacket, high temperature cable

⁴⁾ The following options can be set:
Option 1 (IR with 96 Hz at 160 x 120 px; VIS with 32 Hz at 640 x 480 px)
Option 2 (IR mit 128 Hz at 160 x 120 px; VIS with 32 Hz at 596 x 447 px)

⁵⁾ +75 °C higher start temperature for optics with focal length f = 50 mm, f = 75 mm

⁶⁾ Only applies when lens protection tube is used

optris® PI LightWeight

EXTRA LIGHT IR CAMERA WITH MINI PC

Radiometric aerial thermography

- IR inspection with up to 640x480 pixels and a thermal sensitivity up to 40 mK
- Fully radiometrically calibrated system with high measuring accuracy of $\pm 2\%$ / $\pm 2^\circ\text{C}$ in each pixel
- Two-piece 380 g design
- Radiometric onboard real-time recording with USB 3.0 stick
- GPS and GoPro support
- Video recording with low motion blur due to high frame rate (up to 125 Hz / VGA sub-frame mode)
- Free updates for the Recording Box software
- Comprehensive, license-free analysis software PI Connect
- Remote-controlled recording and switching between VIS / IR live video



Possible extension with GoPro Hero camera, GPS USB flash drive and 2.4 GHz flight control receiver



Specifications LightWeight Recording Box

Power supply	10–48 V DC
Power consumption	12 W
Cooling	Active (integrated fan)
Ambient temperature	0 °C ... 50 °C
Relative humidity	10-95%/ non-condensing
Dimensions	96 x 67 x 47 mm
Weight	380 g (PI camera + Recording Box)
Material (housing)	Aluminum
Module	Odroid XU4
Processor	Samsung Exynos/ 2 GHz
Operating system	Linux
Memory	16 GB eMMC, 2 GB RAM (LPDDR3), SDHC card (16 GB), USB 3.0 flash drive (128 GB)
Connections	Ethernet (GigE/ 1000 Mbit/ s), 2x USB 3.0/ 1x USB 2.0, 1x Mini-USB for GoPro Hero3+ (or better), 1x HDMI, 1x TVout, 2x JR connectors
Terminals	+5V DC out, Video IN (VIS camera), TVout, 2x external switches
Control (via JR connectors or terminal)	Start/ Stop recording, Switch VIS/ IR camera
Additional features	GPS support, 5 Status LEDs

Specifications optris® PI camera head

Measuring range	-20 °C ... 900 °C
Spectral range	7.5–13 μm
Accuracy	$\pm 2\%$ or $\pm 2^\circ\text{C}$
Thermal sensitivity (NETD)	40/ 80 mK (depending on camera model)
Optics	13° ... 90° HFOV
Resolution	640 x 480 px / 382 x 288 px
Dimensions	46 x 56 x 90 mm
Ambient temperature	0 °C ... 50/ 70 °C (PI 450)

Stand-alone solution for optris® PI series

- Miniature PC as an add-on to the PI series for stand-alone system or for cable extension via GigE
- Integrated hardware and software watchdog
- Installation of additional user software possible
- Status LEDs
- Processor: Intel® E3845 Quad Core / 1.91 GHz, 16 GB SSD, 2 GB RAM
- Connections: 2x USB 2.0, 1x USB 3.0, 1x Mini USB 2.0, Micro HDMI, Ethernet (Gigabit Ethernet), Micro SDHC / SDXC card
- Operating system: Windows 7 Professional
- Wide supply voltage range (8–48 V DC) or Power over Ethernet (PoE)
- Can be integrated with CoolingJacket Advanced




General specifications

Ambient temperature	0 °C ... 50 °C
Storage temperature	-20 °C ... 75 °C
Relative humidity	10–95 %, non-condensing
Material (casing)	Anodized aluminum
Dimensions	113 x 57 x 47 mm
Weight	385 g
Vibration	IEC 60068-2-6 (sine-shaped) / IEC 60068-2-64 (broadband noise)
Shock	IEC 60068-2-27 (25 g and 50 g)
Operating system	Windows 7 Professional

Electrical specifications

Voltage supply	8–48 V DC or Power over Ethernet (PoE/ 1000BASE-T)
Power consumption	7.5 W (+ additional 2.5 W for PI camera)
Cooling	Active via two integrated fans
Module	COM Express® mini embedded board
Processor	Intel® E3845 Quad Core, 1.91 GHz
Hard drive	16 GB SSD
RAM	2 GB (DDR2, 533 MHz)
Connections	2x USB 2.0, 1x USB 3.0, 1x Mini USB 2.0, Micro HDMI, Ethernet (Gigabit Ethernet)
Memory card slots	micro SDHC/ SDXC card
Additional features	4x Status LEDs

Stand-alone solution with GigE remote access

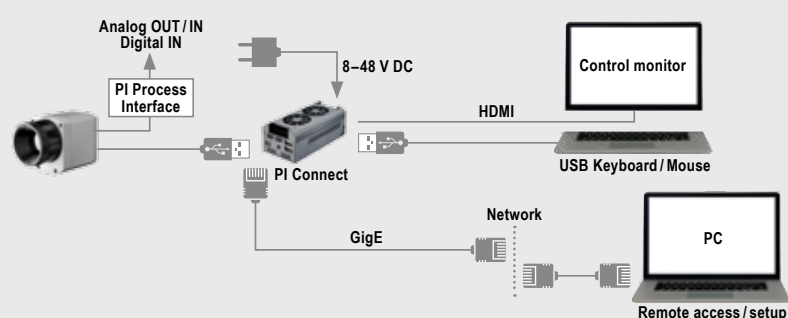

optris® USB Server Gigabit

SIMPLE CABLE EXTENSION

Simple cable extension for the optris® PI series

- Fully compatible with USB 2.0, Data transfer rate 1.5 / 12 / 480 mbps, USB transfer mode: isochronous
- Network connection via Gigabit Ethernet
- For all models in the optris® PI series
- Full TCP/IP support incl. routing and DNS
- Two independent USB connections
- Power via PoE or external voltage supply at 24–48 V DC
- Galvanic isolation 500 V_{RMS} (network connection)
- Remote configuration via web-based management
- Certified technology from Wiesemann & Theis




Technical data

USB connections	2 x USB A Port
USB speed	480 Mbit/s
Network	10/100/1000 BaseT (max. 1000 Mbit/s)
Power supply	Power over Ethernet (PoE) class 3 (6.49 – 12.95 W) or via screw terminal DC 24 V ... 48 V (+/-10 %)
Power consumption	External power supply (24 V DC) without USB devices: typ. 120 m A External power supply (24 V DC) with 2 USB devices each 2.5 W : typ. 420 mA
Ambient temperature	Storage: -40 °C ... 85 °C In operation, individually assembled: 0 °C ... 50 °C
Permissible relative humidity	0 – 95 % (non-condensing)
Casing	Compact plastic casing for DIN rail mount, 105 x 75 x 22 mm
Weight	200 g
Contents	<ul style="list-style-type: none"> • 1 x USB Server Gigabit • 24 V DC wall plug transformer • Quick guide* <p>* included on PI Connect CD or Compact Connect CD: – USB-Redirector – WuTility Management Tool – Operating instructions (DE / EN)</p>

Protocols

USB protocols	USB 1.0 / 1.1 / 2.0 Control / Bulk / Interrupt / Isochronous
Protocols for direct network connection	TCP/IP: Socket Auxiliary protocols: ARP, DHCP, HTTP, PING Inventory keeping, group management

Connection options

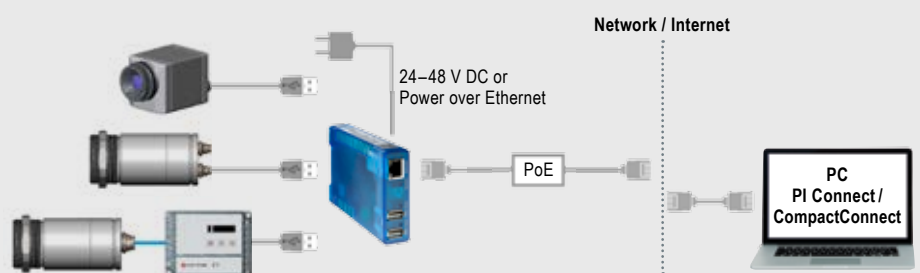

UNIVERSAL PROTECTIVE HOUSING FOR COOLING UP TO 315 °C

Universal protection for the optris® PI series under harsh industrial environments

- Operation at ambient temperatures of up to 315 °C
- Air/Water cooling with integrated air purging and optional protective windows
- Modular design for easy fitting of different devices and lenses
- Trouble-free, on the spot sensor removal via quick-release chassis
- Integration of additional components like PI NetBox, USB Server Gigabit and Industrial Process Interface (PIF) in the extended version





Technical data	CoolingJacket	CoolingJacket Advanced Standard	CoolingJacket Advanced Extended
Protective rating	IP 52	IP 65	IP 65
Ambient temperature	up to 180 °C	up to 315 °C ¹⁾	up to 315 °C ¹⁾
Relative humidity	10 - 95 %, non-condensing	10 - 95 %, non-condensing	10 - 95 %, non-condensing
Material (casing)	V2A	V2A	V2A
Dimensions	237 mm x 117 mm x 138 mm	271 mm x 166 mm x 182 mm	426 mm x 166 mm x 182 mm
Weight	4.5 kg	5.7 kg	7.8 kg
Air purge collar	G1/4" internal thread G3/8" external thread	G1/4" internal thread G3/8" external thread	G1/4" internal thread G3/8" external thread
Cooling water fittings	G1/4" internal thread G3/8" external thread	G1/4" internal thread G3/8" external thread	G1/4" internal thread G3/8" external thread
Cooling water pressure	max. 15 bar (217 psi)	max. 15 bar (217 psi)	max. 15 bar (217 psi)
Contents	<ul style="list-style-type: none"> • CoolingJacket, consisting of housing and chassis 	<ul style="list-style-type: none"> • CoolingJacket Advanced, consisting of housing with mounting brackets, chassis and focusing unit respectively front part²⁾ • Installation instructions 	<ul style="list-style-type: none"> • CoolingJacket Advanced, consisting of housing with mounting brackets, chassis and focusing unit respectively front part²⁾ • Mounting accessories for – PI Netbox or USB Server Gigabit – Industrial PIF • Installation instructions

¹⁾ Cable for up to 250 °C ambient temperature as well as cable cooling for up to 315 °C available.

²⁾ Focusing unit and front part are exchangeable and have to be ordered separately.

Dimensions in mm

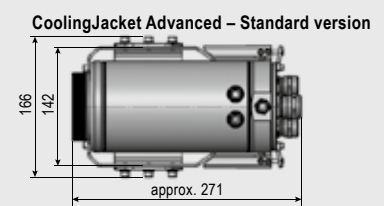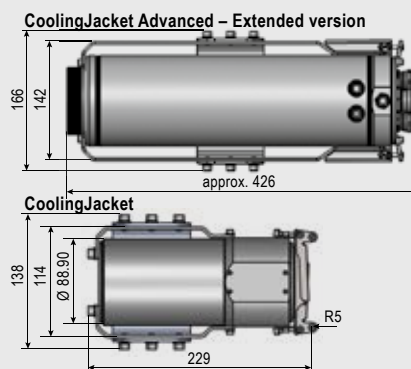

optris® Industrial Process Interface

WITH FAIL-SAFE MONITORING

Camera and process control for use in an industrial environment

- Industrial Process Interface with 3 analog / alarm outputs, 2 analog inputs, 1 digital input, 3 alarm relays
- 500 V AC_{RMS} isolation voltage between camera and process
- Separate fail-safe relay output
- The PI hardware with all cable connections and the PI Connect software are permanently monitored during operation



General specifications

Protective rating	IP65 (NEMA-4)
Ambient temperature	-30 °C ... 85 °C
Storage temperature	-30 °C ... 85 °C
Humidity	10 – 95 %
Vibrational stability	IEC 60068-2-6 (non condensing)/ IEC 60068-2-64 (broadband noise)
Shock stability	IEC 60068-2-27 (25 g and 50 g)
Weight	610 g (with 5 m cable)
Cable lengths	5 m HT cable (standard), optional 10 m and 20 m

Electrical specifications

Voltage supply	5 – 24 V DC
LED indicators	2 green LEDs for voltage and fail safe / 3 red LEDs for alarm relay status
Isolation	500 V AC _{RMS} between PI camera und process
Outputs	3 analog / alarm outputs 3 alarm relays ¹⁾
Inputs	2 analog inputs 1 digital input
Ranges	0 – 10 V (for AO 1–3) ²⁾ 0 – 30 V / 400 mA (for alarm relays DO1–3) 0 – 10 V (for AI 1–2) 24 V (for DI)

Programmable functions

Analog inputs	<ul style="list-style-type: none"> • Emissivity setting • Ambient temperature compensation • Reference temperature • Uncommitted value • Flag control • Triggered snapshots, triggered recordings, triggered line scan camera
Digital input	<ul style="list-style-type: none"> • Flag control • Triggered snapshots, triggered recordings, triggered line scan camera
Analog outputs	<ul style="list-style-type: none"> • Main measurement range • Measurement range • Internal temperature • Flag status • Alarm • Frame sync. • Fail-Safe • External communication

¹⁾ active when AO1, 2 or 3 is / are programmed as alarm output

²⁾ dependent on supply voltage

UNIVERSAL PROTECTIVE HOUSING FOR THE INFRARED CAMERAS OF THE OPTRIS® PI SERIES

Universal outdoor protection for infrared cameras of the optris® PI series


- Environmental rating IP 66
- Additional air purge collar allows for a continuous operation in dusty and humid conditions
- Heating element and built-in fan enable for a 24/7 operation from -40 °C
- Installation of USB Server Gigabit possible for integration into control systems over large outdoor distances



Specifications

Environmental rating	IP 66
Ambient temperature	-40 °C ... 50 °C
Heating	PTC heater (automatically starting at T < 15 °C) / fan for homogeneous temperature distribution
Power supply	24 V DC
Power	70 W
Protective window	Germanium (Ge), zinc sulfide (ZnS), Borofloat or foil
Air purge collar	Integrated
Integrable additional components	USB Server Gigabit Industrial Process interface (PIF)
Max. FOV	90° (HFOV)
Accessories	Optional wall mount bracket

Example of fail-safe monitoring of the PI camera with connected PLC

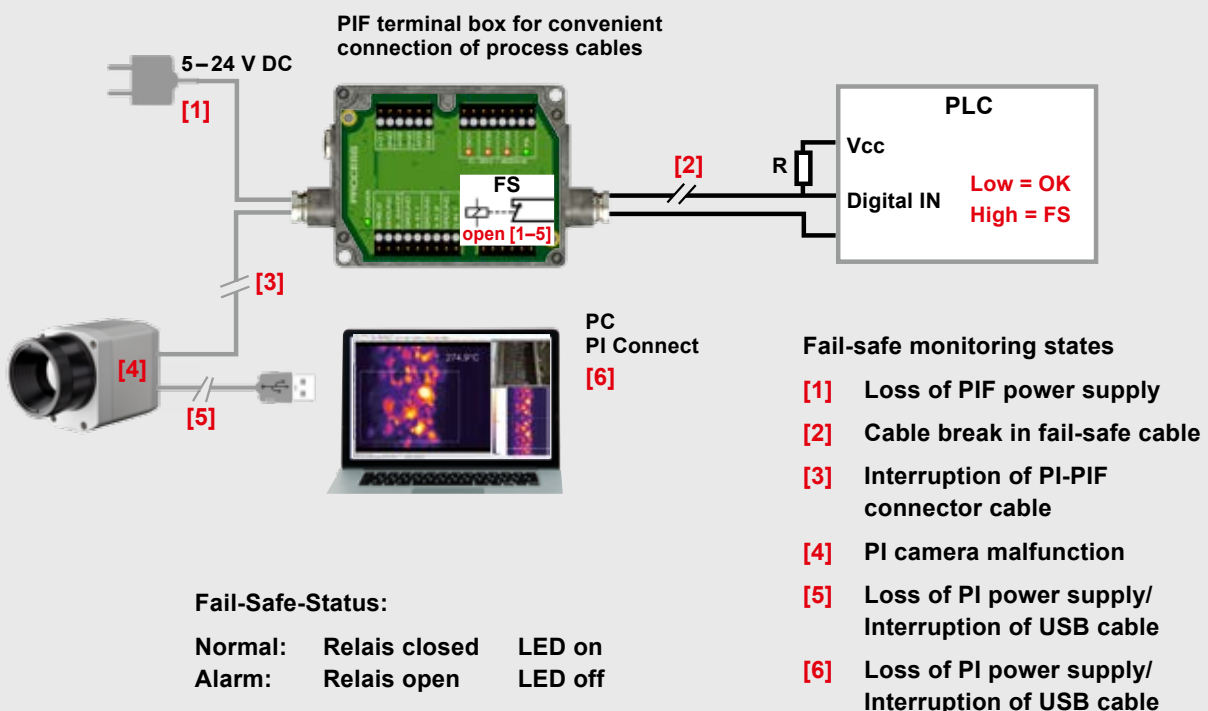


1 Comprehensive IR camera software

- No additional costs
- No licensing restrictions
- Modern software with intuitive user interface
- Remote control of camera via software
- Display of numerous images in different windows
- Compatible with Windows 7, 8 and 10 as well as Linux (ubuntu)
- Extensive license-free analysis and two Software Development Kits for Windows and Linux included




3 High degree of individualization for customer-specific imaging

- Various layout options for individual customization (window arrangement, toolbar)
- Temperature display in °C or °F
- Various language options including translate function
- Choice of individual measurement parameters tailored to the respective application
- Editing of the thermal image (flip, rotate)
- Individual start options (full screen, hidden etc.)

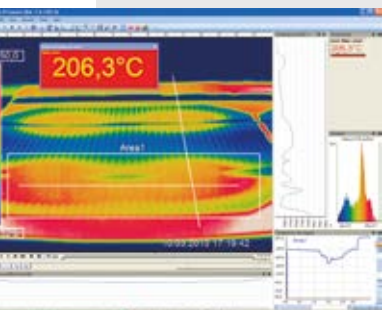




5 Video recording and snapshot function (IR or BI-SPECTRAL)

- Recording of video sequences and individual images for later analysis or documentation
- BI-SPECTRAL video analysis (IR and VIS) to highlight critical temperatures
- Adjustable frame rate to reduce data volume
- Display of snapshot process for direct analysis

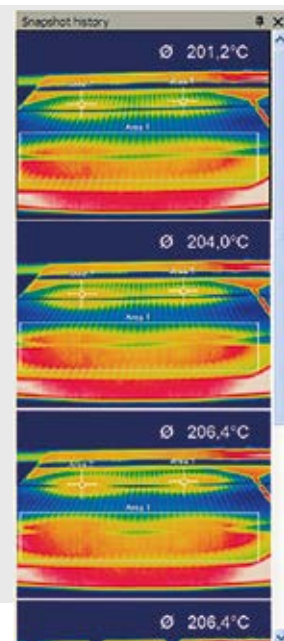


2 Detailed online and offline data analysis

- Real time temperature information in main window, as digital display or graphic display
- Detailed analysis with the help of measurement fields, automatic hotspot and coldspot search
- Logical linking of temperature information (measurement field discrepancy, image subtraction)
- Slow-motion replay of radiometric datasets and analysis even without connected camera
- Editing of sequences, e.g. cut and save individual images
- Various color palettes to highlight thermal contrasts

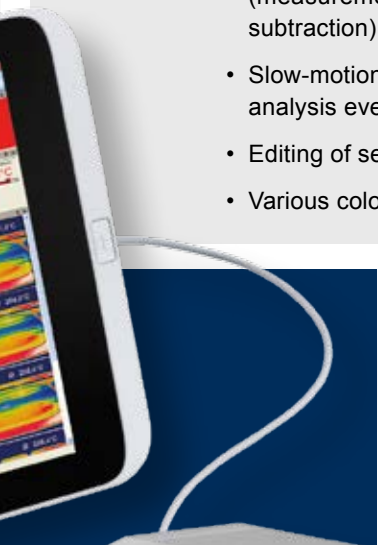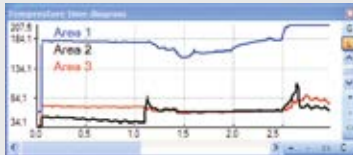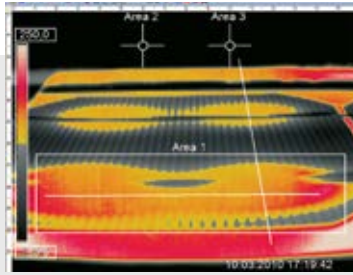


4 Automatic process control and quality control

- Individual setting of alarm thresholds depending on the process
- BI-SPECTRAL monitoring mode (IR and VIS) for easy orientation at the measuring point
- Definition of visual or acoustic alarms and analog data output
- Analog and digital signal input (parameter)
- External communication of software via Comports, DLL
- Adjustment of thermal image via reference values
- Measurement fields can be freely designed or created

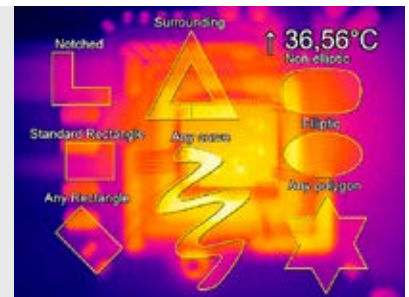

6 Temperature data analysis and documentation

- Triggered data gathering
- Radiometric video sequences (*.ravi)
- Radiometric snapshots (*.tiff)
- Text files including comprehensive temperature information for analysis in Excel (*.csv, *.dat)
- Files with color information for standard programs like Photoshop or Windows Media Player (*.avi, *.tiff)
- Data transfer in real time to other software programs via DLL or COM-Port interfaces

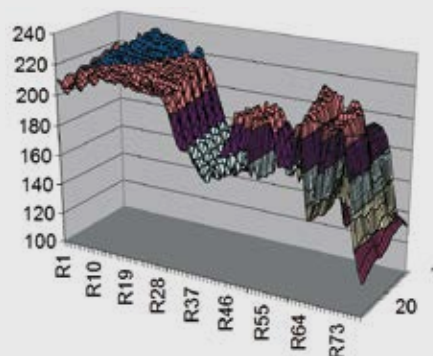


For the measurement of moving objects

The optris® PI Connect software is equipped with a line scan camera function. The line scanner is primarily used for processes involving moving measurement objects, like rotary kiln measurements or large quantities on conveyor belts (batch process).



The advantages

Simple monitoring of processes with limited visual access

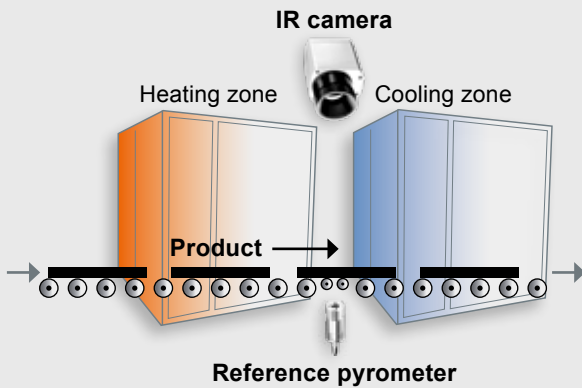

Indirect visualization of heat distribution in ovens via camera installation at oven exit

Only 3 steps to initialize the function

Step 1


Activation of the line scan camera function (continuous, self-triggered, external trigger) and definition of the position of the lines in the thermal image. For this the camera itself serves as an orientation aid.

Step 2


Configuration of line scan function, e.g. number of lines displayed or set trigger for automatic saving of images.

Step 3

Definition of individual layouts, e.g. display of saved images in the snapshot process.

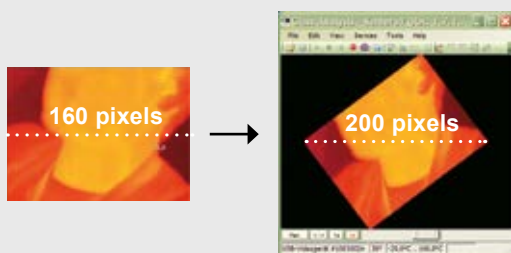


Increase in the number of pixels, e.g. from 160 pixels to 200 pixels by using diagonal screen measurement

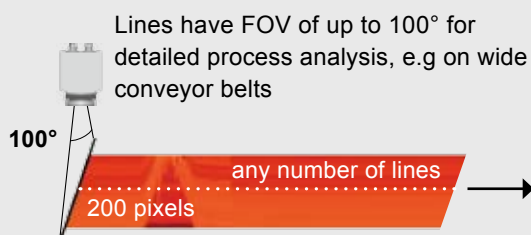

Lines have FOV of up to 100° for detailed process analysis, e.g. on wide conveyor belts

Up to 128 Hz data recording of unlimited lines which in turn produce a thermal image of any given resolution

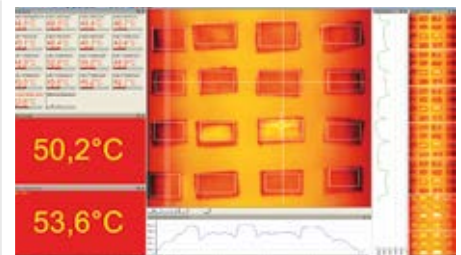

Layout example for display of line scan camera function

Precise measuring at various distances

A choice of lenses allows you to precisely measure objects at various distances, from close and standard distances right up to large distances.

With infrared cameras there are various parameters which display the relationship between the distance from the measuring object and the size of the pixel on the object plane. In choosing the correct lens, the following should be taken into account:

HFOV

Horizontal expansion of the total measuring field on the object plane.

VFOV

Vertical expansion of the total measuring field on the object plane

IFOV

Size of individual pixels on the object plane


DFOV

Diagonal expansion of the total measuring field on the object plane

MFOV

Recommended, smallest measuring object size of 3 x 3 pixels

Measuring field of optris® PI infrared camera using a 23° x 17° lens

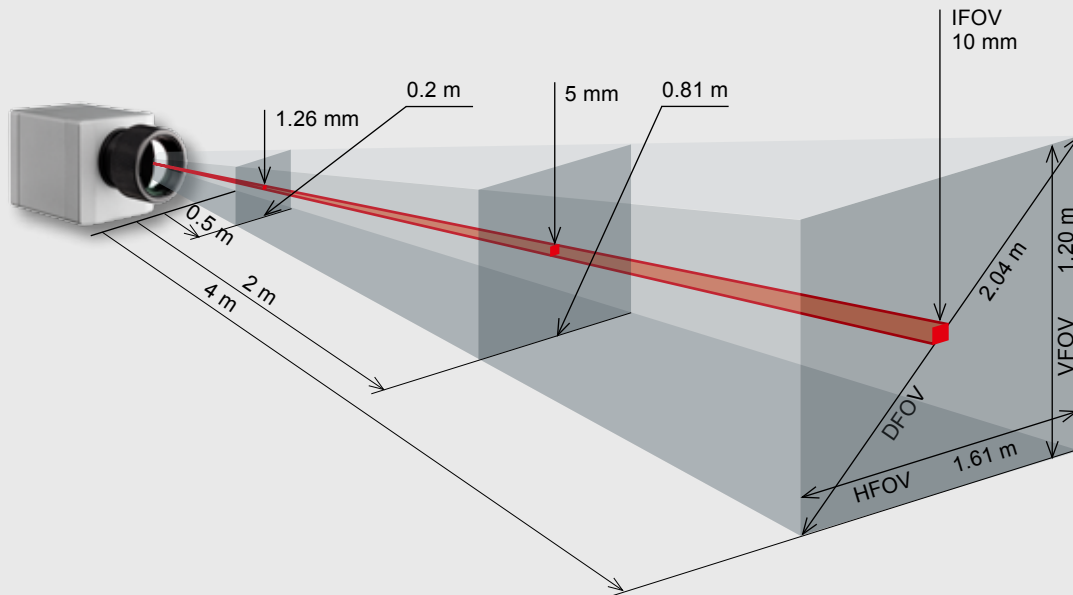

Optics calculator

Measurement field sizes for any given distance can be calculated online at www.optris.com/optics-calculator



Optical data

OPTICS

PI 160 / 200 160 x 120 px	Focal length [mm]	Minimum measurement distance*	Angle	Distance to measurement object [m]												
					0.02	0.1	0.2	0.3	0.5	1	2	4	6	10	30	100
O23 Standard lens	10	0.2 m	23°	HFOV [m]	0.012	0.043	0.08	0.12	0.21	0.41	0.81	1.62	2.44	4.1	12.2	40.6
			17°	VFOV [m]	0.009	0.032	0.06	0.09	0.15	0.30	0.60	1.21	1.81	3.0	9.0	30.1
			29°	DFOV [m]	0.015	0.054	0.10	0.16	0.26	0.51	1.01	2.02	3.03	5.1	15.2	50.5
			2.48 mrad	IFOV [mm]	0.1	0.3	0.5	0.8	1.3	2.5	5.0	9.9	14.9	24.8	74.4	248.0
O6 Telephoto lens	35.5	0.5 m	6°	HFOV [m]					0.06	0.11	0.23	0.45	0.68	1.1	3.4	11.3
			5°	VFOV [m]					0.04	0.09	0.17	0.34	0.51	0.8	2.5	8.5
			8°	DFOV [m]					0.07	0.14	0.28	0.57	0.85	1.4	4.2	14.2
			0.70 mrad	IFOV [mm]					0.4	0.7	1.4	2.8	4.2	7.0	21.1	70.4
O48 Wide angle lens	5.7	0.2 m	41°	HFOV [m]	0.022	0.082	0.16	0.23	0.38	0.76	1.51	3.00	4.50	7.5	22.5	74.9
			31°	VFOV [m]	0.016	0.059	0.11	0.17	0.28	0.55	1.10	2.19	3.28	5.5	16.4	54.5
			51°	DFOV [m]	0.027	0.101	0.19	0.29	0.47	0.94	1.86	3.72	5.57	9.3	27.8	92.7
			4.39 mrad	IFOV [mm]	0.1	0.4	0.9	1.3	2.2	4.4	8.8	17.5	26.3	43.9	131.6	438.6
O72 Wide angle lens	3.3	0.2 m	72°	HFOV [m]	0.039	0.152	0.29	0.43	0.72	1.42	2.84	5.66	8.49	14.1	42.4	141.4
			52°	VFOV [m]	0.027	0.106	0.20	0.30	0.50	0.99	1.98	3.95	5.92	9.9	29.6	98.6
			89°	DFOV [m]	0.048	0.186	0.36	0.53	0.87	1.74	3.46	6.91	10.35	17.2	51.7	172.3
			7,51 mrad	IFOV [mm]	0.2	0.8	1.5	2.3	3.8	7.5	15.0	30.0	45.0	75.1	225.2	750.8

PI 400 / 450 PI 450 G7 382 x 288 px	Focal length [mm]	Minimum measurement distance*	Angle	Distance to measurement object [m]												
					0.02	0.1	0.2	0.3	0.5	1	2	4	6	10	30	100
O29 Standard lens	18.7	0.2 m	29°	HFOV [m]		0.060	0.11	0.16	0.27	0.53	1.0	2.1	3.1	5.2	15.6	52.1
			22°	VFOV [m]		0.045	0.08	0.12	0.20	0.40	0.78	1.6	2.3	3.9	11.7	39.0
			37°	DFOV [m]		0.074	0.14	0.20	0.33	0.66	1.3	2.6	3.9	6.5	19.5	65.1
			1.34 mrad	IFOV [mm]		0.1	0.3	0.4	0.7	1.3	2.7	5.4	8.0	13.4	40.1	133.7
O13 Telephoto lens	41	0.5 m	13°	HFOV [m]					0.12	0.23	0.47	0.94	1.40	2.3	7.0	23.4
			10°	VFOV [m]					0.09	0.17	0.35	0.70	1.05	1.7	5.2	17.5
			17°	DFOV [m]					0.15	0.29	0.58	1.17	1.75	2.9	8.8	29.2
			0.61 mrad	IFOV [mm]					0.3	0.6	1.2	2.5	3.7	6.1	18.4	61.2
O53 Wide angle lens	10.5	0.2 m	53°	HFOV [m]		0.11	0.21	0.31	0.51	1.0	2.0	4.0	6.0	9.9	29.7	99.0
			40°	VFOV [m]		0.08	0.15	0.23	0.37	0.73	1.4	2.9	4.3	7.2	21.6	71.9
			66°	DFOV [m]		0.14	0.26	0.38	0.63	1.2	2.5	4.9	7.4	12.2	36.7	122.3
			2.38 mrad	IFOV [mm]		0.2	0.5	0.7	1.2	2.4	4.8	9.5	14.3	23.8	71.5	238.4
O80 Super wide angle lens	7.7	0.2 m	80°	HFOV [m]		0.182	0.35	0.84	0.84	1.65	3.29	6.55	9.82	16.4	49.0	163.4
			56°	VFOV [m]		0.119	0.23	0.55	0.54	1.08	2.14	4.28	6.41	10.7	32.0	106.6
			97°	DFOV [m]		0.218	0.41	1.00	1.00	1.97	3.92	7.83	11.73	19.5	58.5	195.1
			3.25 mrad	IFOV [mm]		0.3	0.7	1.6	1.6	3.3	6.5	13.0	19.5	32.5	97.4	324.7

PI 640 PI 640 G 7 640 x 480 px	Focal length [mm]	Minimum measurement distance*	Angle	Distance to measurement object [m]											
					0.1	0.2	0.3	0.5	1	2	4	6	10	30	100
O33 Standard lens	18.7	0.2 m	33°	HFOV [m]	0.068	0.13	0.19	0.31	0.60	1.20	2.38	3.57	5.9	17.8	59.3
			25°	VFOV [m]	0.051	0.09	0.14	0.23	0.45	0.89	1.77	2.65	4.4	13.2	44.2
			41°	DFOV [m]	0.085	0.16	0.23	0.38	0.75	1.49	2.97	4.45	7.4	22.2	74.0
			0.91 mrad	IFOV [mm]	0.1	0.2	0.3	0.5	0.9	1.8	3.6	5.5	9.1	27.3	90.9
O15 Tele lens	41.5	0.5 m	15°	HFOV [m]				0.13	0.26	0.52	1.05	1.57	2.6	7.8	26.1
			11°	VFOV [m]				0.10	0.20	0.39	0.79	1.18	2.0	5.9	19.6
			19°	DFOV [m]				0.17	0.33	0.66	1.31	1.96	3.3	9.8	32.7
			0.41 mrad	IFOV [mm]				0.2	0.4	0.8	1.6	2.5	4.1	12.3	41.0
O60 Wide angle lens	10.5	0.2 m	60°	HFOV [m]	0.128	0.25	0.36	0.59	1.17	2.32	4.63	6.94	11.6	34.6	115.4
			45°	VFOV [m]	0.091	0.18	0.26	0.42	0.83	1.66	3.31	4.96	8.3	24.7	82.4
			75°	DFOV [m]	0.157	0.30	0.44	0.72	1.43	2.85	5.69	8.52	14.2	42.6	141.8
			1.62 mrad	IFOV [mm]	0.2	0.3	0.5	0.8	1.6	3.2	6.5	9.7	16.2	48.6	161.9
O90 Super wide angle lens	7.7	0.2 m	90°	HFOV [m]	0.220	0.43	0.63	1.03	2.03	4.04	8.06	12.07	20.1	60.3	200.8
			64°	VFOV [m]	0.138	0.27	0.39	0.64	1.27	2.53	5.05	7.57	12.6	37.8	125.9
			111°	DFOV [m]	0.260	0.50	0.73	1.21	2.39	4.76	9.50	14.24	23.7	71.1	237.0
			2.21 mrad	IFOV [mm]	0.2	0.4	0.7	1.1	2.2	4.4	8.8	13.2	22.1	66.2	220.8

PI 1M / PI 05M ¹⁾ 382 x 288 px	Focal length [mm]	Minimum measurement distance*	Angle	Distance to measurement object [m]											
					0.1	0.2	0.3	0.5	1	2	4	6	10	30	100
OF16	16	0.2 m	20°	HFOV [m]		0.07	0.11	0.18	0.36	0.72	1.43	2.15	3.6	10.7	35.8
			15°	VFOV [m]		0.05	0.08	0.14	0.27	0.54	1.08	1.62	2.7	8.1	27.0
			25°	DFOV [m]		0.09	0.13	0.22	0.45	0.90	1.79	2.69	4.5	13.5	44.9
			0.94 mrad	IFOV [mm]		0.2	0.3	0.5	0.9	1.9	3.8	5.6	9.4	28.1	93.8
OF25	25	0.5 m	13°	HFOV [m]	0.023	0.05	0.07	0.11	0.23	0.46	0.92	1.38	2.3	6.9	22.9
			10°	VFOV [m]	0.017	0.03	0.05	0.09	0.17	0.35	0.69	1.04	1.7	5.2	17.3
			16°	DFOV [m]	0.029	0.06	0.09	0.14	0.29	0.57	1.15	1.72	2.9	8.6	28.7
			0.60 mrad	IFOV [mm]	0.1	0.1	0.2	0.3	0.6	1.2	2.4	3.6	6.0	18.0	60.0
OF50	50	1.5 m	7°	HFOV [m]				0.06	0.11	0.23	0.46	0.69	1.1	3.4	11.5
			5°	VFOV [m]				0.04	0.09	0.17	0.35	0.52	0.9	2.6	8.6
			8°	DFOV [m]				0.07	0.14	0.29	0.57	0.86	1.4	4.3	14.4
			0.30 mrad	IFOV [mm]				0.2	0.3	0.6	1.2	1.8	3.0	9.0	30.0
OF75	75	2.0 m	4°	HFOV [m]					0.08	0.15	0.31	0.46	0.8	2.3	7.6
			3°	VFOV [m]					0.06	0.12	0.23	0.35	0.6	1.7	5.8
			5°	DFOV [m]					0.10	0.19	0.38	0.57	1.0	2.9	9.6
			0.20 mrad	IFOV [mm]					0.2	0.4	0.8	1.2	2.0	6.0	20.0

Table with examples showing which measurement field sizes and pixel sizes will be reached at which distance. For optimal configuration of the camera there are various lenses available. Wide angle lenses have radial distortion due to the angle of their aperture. The PI Connect software has an algorithm which corrects this distortion.

* Please note: Please use the optics calculator on our website in order to calculate measurement fields with shorter measurement distances:

<http://www.optris.com/optics-calculator>

The measurement accuracy of the camera may lie outside of the specifications for distances below the defined minimum measurement distance.

¹⁾ PI 05M is only available with OF25 optics

Optical data

OPTICS

PI 1M / PI 05M ¹⁾	Focal length [mm]	Minimum measurement distance*	Angle	Distance to measurement object [m]											
					0,1	0,2	0,3	0,5	1	2	4	6	10	30	100
764 x 480 px	16	0.2 m	39°	HFOV [m]		0.14	0.21	0.36	0.72	1.43	2.87	4.30	7.2	21.5	71.6
			25°	VFOV [m]		0.09	0.14	0.23	0.45	0.90	1.80	2.70	4.5	13.5	45.0
			46°	DFOV [m]		0.17	0.25	0.42	0.85	1.69	3.38	5.08	8.5	25.4	84.6
			0.94 mrad	IFOV [mm]		0.2	0.3	0.5	0.9	1.9	3.8	5.6	9.4	28.1	93.8
OF25	25	0.5 m	26°	HFOV [m]	0.046	0.09	0.14	0.23	0.46	0.92	1.83	2.75	4.6	13.8	45.8
			16°	VFOV [m]	0.029	0.06	0.09	0.14	0.29	0.58	1.15	1.73	2.9	8.6	28.8
			30°	DFOV [m]	0.054	0.11	0.16	0.27	0.54	1.08	2.17	3.25	5.4	16.2	54.1
			0.60 mrad	IFOV [mm]	0.1	0.1	0.2	0.3	0.6	1.2	2.4	3.6	6.0	18.0	60.0
OF50	50	1.5 m	13°	HFOV [m]				0.11	0.23	0.46	0.92	1.38	2.3	6.9	22.9
			8°	VFOV [m]				0.07	0.14	0.29	0.58	0.86	1.4	4.3	14.4
			15°	DFOV [m]				0.14	0.27	0.54	1.08	1.62	2.7	8.1	27.1
			0.30 mrad	IFOV [mm]				0.2	0.3	0.6	1.2	1.8	3.0	9.0	30.0
OF75	75	2.0 m	9°	HFOV [m]					0.15	0.31	0.61	0.92	1.5	4.6	15.3
			5°	VFOV [m]					0.10	0.19	0.38	0.58	1.0	2.9	9.6
			10°	DFOV [m]					0.18	0.36	0.72	1.08	1.8	5.4	18.0
			0.20 mrad	IFOV [mm]					0.2	0.4	0.8	1.2	2.0	6.0	20.0

¹⁾ PI 05M is only available with OF25 optics

