

Digital Anemometer DAM-30

Wind speed
0 ~ 30 m/s

Temperature
-10 ~ +50°C

Data Hold

Battery Indicator



A necessity

for safety at work

Various functions in small body



FEATURE 1 Compact, one hand operation

FEATURE 2 Beaufort scale & Wind chill

FEATURE 3 Data hold

FEATURE 4 MAX & AVERAGE data

FEATURE 5 Backlight & Battery indicator

FEATURE 6 Auto power off (5mins or off)

How wind can affect your work

Drone

In general, Max Wind Speed Resistance of heavy drones is higher than light drones. In other words, heavy drones can fly in stronger winds.

However, wind speed rises proportionally to the altitude. There is a big gap between wind speed on the ground and in the upper air especially in a built-up area. Operator must pay the most careful attention to the wind.



| Model | Weight | Max Wind Speed Resistance |
|-----------|--------|---------------------------|
| Phantom4 | 1,380g | 10m/s |
| Mavic Air | 430g | 8~10.5m/s |
| Spark | 300g | 5.5~7.7m/s |


Construction site

In Japan Standard, workers must stop their work when the average wind speed is over 10m/s at construction site. Chart shows the result of a research : how people feel danger by wind during their work.


Participants : 10 people
Years of experience : 12.4 years (ave.)

When average wind speed is 10m/s, there may be a stronger wind momentarily. It is important to know the work environment constantly.

Wind speed when they felt dangerous (10 sec)



Display & Button

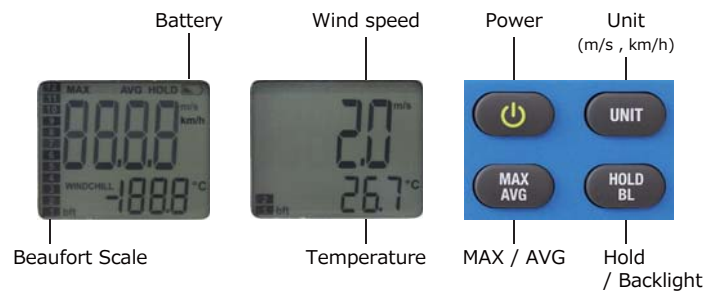

Specifications

| | | |
|----------------------------------|-------------|---------------------------|
| Measuring range | Wind speed | 0 ~ 30m/s |
| | Temperature | -10 ~ 50°C |
| Resolution | Wind speed | 0.1m/s |
| | Temperature | 0.1°C |
| Accuracy | Wind speed | ± (5%rdg + 0.5m/s) |
| | Temperature | ±2°C |
| Sampling rate | | approx. 0.5sec |
| Auto power off | | approx. 5 min or off |
| Operating temperature / humidity | | 0 ~ 40°C under 80%RH |
| Storage temperature / humidity | | -10 ~ 60°C under 75%RH |
| Overload indication | Wind speed | over 45m/s |
| | Temperature | under -10°C or over 50°C |
| Wind chill notification | | over 5m/s, under 0°C |
| Power | | AAA battery × 3 |
| Dimensions | | W54 × H163 × D30mm |
| Weight | | approx. 120g |

Standard Accesories

- AAA battery x 3
- Manual



Blister pack

| Code No. | Product Name | Model |
|----------|--------------------|--------|
| 222323 | Digital Anemometer | DAM-30 |

Myzox Co., Ltd.

401 Yamagoe, Nagakute, Aichi 480-1111 Japan
TEL : +81-561-64-2210 FAX : +81-561-63-7770

www.myzoxjapan.com

Your Local Authorized Myzox Dealer is :