

TW325

Features

Our longest lasting DN125/5 Twin-Wall™ System features a 3.25mm wear resistant pipe liner and 1.5mm steel shell, with the ends having a chrome carbide liner to protect the pipe against excessive wear.

Specifications

Heat Treatment

Induction Hardened

System

DN125/5

Wall Thickness

3.25mm + 1.5mm

Hardness

Up to 68HRc

Working Pressure

85 bar (1250psi)

Pipe Weight

10.7 lbs/ft (15.9 kg/m)

FWC Weight


29.5 lbs/ft (43.7 kg/m)

Complete System

- Twin-Wall™ Deck Pipe
- CCI-Lined Elbows
- CCI-Lined Backend Kit
- CCI-Lined Deck Pipe
- CCI-Lined Reducers

Twin-Wall™ Boom Tube (3.25mm + 1.5mm) with 148mm chrome carbide insert (CCI) weld ends

Length (in)	Length (mm)	Approx. Shipping Weight (lbs / Kg)	Part Number
39.37	1000	37 / 17	B48TW3937M
78.75	2000	70 / 32	B48TW7875M
118.12	3000	103 / 47	B48TWB812M
157.50	4000	135 / 61	B48TWF750M
Make up length (consult factory)			B48TW ___ M
Other lengths are available upon request. Consult Factory			

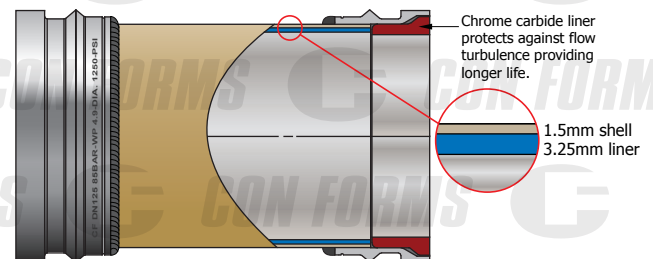

800-223-3676



CONFORMS.COM

