

# HD 14 TT

Tandem roller with two sets of tyres


Tandem rollers Series HD CompactLine / Series H208









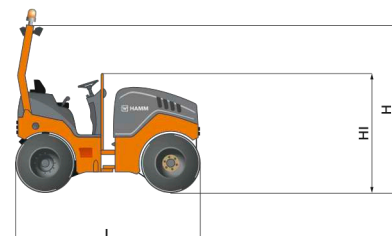

## HIGHLIGHTS HD CompactLine

- > Optimum front view due to concaving front end
- > Ergonomic driver platform
- > Modern instrument panel
- > Low machine height
- > 3-point swivel joint for optimum driving comfort
- > Crab steering
- > Convenient maintenance and service

| Machine dimensions        |    |           |
|---------------------------|----|-----------|
| Total length (L)          | mm | 2856      |
| Width (B)                 | mm | 1296      |
| Total height (H)          | mm | 2590      |
| Width over tyres (Y)      | mm | 1127/1276 |
| Height loading, min. (HI) | mm | 1820      |



| TECHNICAL DATA   |                                    | Unit | HD 14 TT             |
|--|------------------------------------|------|----------------------|
|    | <b>Weights</b>                     |      |                      |
|  | Operating weight with ROPS         | kg   | 3470                 |
|  | Operating weight, max.             | kg   | 4320                 |
|  | Load per tyre, front/rear          | kg   | 535/466,25           |
|    | <b>Machine dimensions</b>          |      |                      |
|  | Total length                       | mm   | 2856                 |
|  | Total height with ROPS             | mm   | 2590                 |
|  | Height loading, min.               | mm   | 1820                 |
|  | Wheel base                         | mm   | 1950                 |
|  | Total width                        | mm   | 1296                 |
|  | Max. working width                 | mm   | 1276                 |
|  | Ground clearance, centre           | mm   | 305                  |
|  | Turning radius, inside             | mm   | 2602                 |
|    | <b>Wheel dimensions</b>            |      |                      |
|  | Size of tyres, front/rear          |      | 10.5/80-16           |
|  | Width over tyres, front/rear       | mm   | 1127/1276            |
|  | Number of tyres, front/rear        |      | 3/4                  |
|    | <b>Diesel engine</b>               |      |                      |
|  | Manufacturer                       |      | KUBOTA               |
|  | Version                            |      | V2203                |
|  | Number of cylinders                |      | 4                    |
|  | Power rat. ISO 14396, kW/PS/rpm    |      | 34,6/47,1/2700       |
|  | Power rating SAE J1349, kW/HP/rpm  |      | 34,6/46,4/2700       |
|  | Emission standard                  |      | EU Stage IIIA        |
|  | Exhaust gas after-treatment        |      | -                    |
|    | <b>Drive</b>                       |      |                      |
|  | Speed, infinitely variable         | km/h | 0-10,0               |
|  | Climbing ability                   | %    | 40                   |
|  | <b>Steering</b>                    |      |                      |
|  | Steering, type                     |      | Articulated steering |
|  | <b>Sprinkler system</b>            |      |                      |
|  | Water sprinkler, type              |      | Pressure             |
|  | <b>Tank capacity/Fill capacity</b> |      |                      |
|  | Fuel tank, capacity                | L    | 73                   |
|  | Water tank, capacity               | L    | 285                  |
|  | <b>Sound level</b>                 |      |                      |
|  | Acoustic power LW(A), sticker      |      | 101                  |
|  | Acoustic power LW(A), measured     |      | 101                  |

#### EQUIPMENT

3-point articulation, Dashboard with displays, indicator lights and switches, Dashboard cover, lockable and weather-resistant, Handrails, Battery isolation switch, Pressure water sprinkling with interval switch, Operator's platform with entry from both sides, Hydrostatic steering, Vibration-isolated operator's platform

#### OPTIONAL EQUIPMENT

Plastic tarpaulin on ROPS, Rotating beacon, V-belt protection, Water drain valve, ROPS cabin with heating, All-wheel lock, Tow hitch, Working lights, Back-up alarm (reversing), Driver's seat with seat heating, black imitation leather, comfort equipment, Anti-freeze injection system, ROPS, foldable, Automatic engine-off function

**HAMM AG**  
Hammstraße 1  
D-95643 Tirschenreuth  
Tel. +49 9631 80-0  
Fax +49 9631 80-111  
www.hamm.eu

