


# WatchGuard® Firebox® M4600 / M5600

The Firebox M4600 and M5600 provide enterprise-grade security and industry-leading price/performance, with the ability to customize port configurations. Ideal as a hub appliance for headquarters with many remote locations to secure, the M4600 and M5600 give IT pros maximum flexibility to meet their specific network requirements.

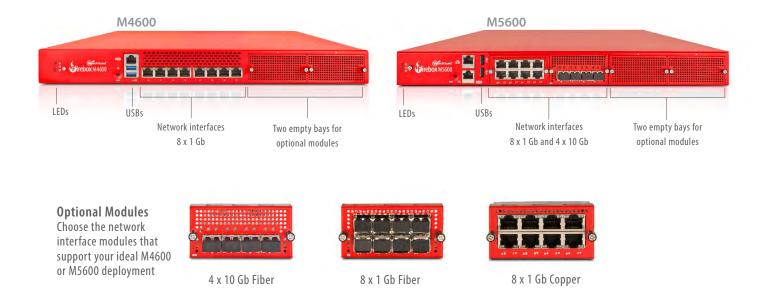

## RECOMMENDED FOR CORPORATE DATACENTERS AND DISTRIBUTED ENTERPRISES

### **BEST-IN-CLASS SECURITY**

- Application-layer content inspection recognizes and blocks threats that stateful packet firewalls cannot detect.
- Powerful subscription-based security services boost protection in critical attack areas for multiple layers of defense. By partnering with leading technology providers, WatchGuard is able to integrate best-in-class security components into one platform for stronger security at big cost savings.
- Advanced networking features, such as dynamic routing and link aggregation, allow you to add security without needing to change existing network infrastructure.
- Multiple VPN choices (IPSec, SSL, L2TP) for secure remote access include support for Android and Apple iOS devices.

## **EASY TO MANAGE**

- WatchGuard Dimension™, a public and private cloud-ready visibility solution, instantly turns raw data into security intelligence.
- Interactive, real-time monitoring and reporting at no additional charge give an unprecedented view into network security activity so you can take immediate preventive or corrective actions.
- Intuitive management console centrally manages all security functions.
- WAN and VPN failover provide redundancy for increased reliability.
- Extend best-in-class UTM (Unifed Threat Management) security to the WLAN by adding WatchGuard's Wireless Access Points.
- Drag-and-drop Branch Office VPN setup three clicks and your remote office is connected.
- Redundant hot-swappable power supply is included to help ensure maximum uptime.



| Firebox                                 | M4600<br>base + 4 x 10 Gb interfaces   | M5600<br>base + 4 x 10 Gb interfaces                          |  |  |
|---|--|---|--|--|
| THROUGHPUT                              |  |   |  |  |
| Firewall throughput*                    | 40 Gbps  | 60 Gbps   |  |  |
| VPN throughput*                         | 10 Gbps  | 10 Gbps   |  |  |
| AV throughput*                          | 9 Gbps   | 12 Gbps   |  |  |
| IPS throughput*                         | 13 Gbps  | 18 Gbps   |  |  |
| UTM throughput*                         | 8 Gbps   | 11 Gbps   |  |  |
| Interfaces (installed)                  | 8 x 1G   | 8 x 1 Gb and 4 x 10 Gb  |  |  |
| I/O interfaces                          | 1 serial/2 USB   | 1 serial/2 USB  |  |  |
| Concurrent connections (bi-directional) | 7.5 million  | 12.7 million  |  |  |
| New connections per second              | 160,000  | 240,000   |  |  |
| VLANs                                   | 1,000  | unrestricted  |  |  |
| Authenticated users limit               | unrestricted   | unrestricted  |  |  |
| VPN TUNNELS                             |  |   |  |  |
| Branch Office VPN                       | 5,000  | unrestricted  |  |  |
| Mobile VPN IPSec                        | 10,000   | unrestricted  |  |  |
| Mobile VPN SSL/L2TP                     | 10,000   | unrestricted  |  |  |
| SECURITY FEATURES                       |  |   |  |  |
| Firewall                                | Stateful packet inspection, deep packet inspection, proxy firewall   |   |  |  |
| Application proxies                     | HTTP, HTTPS, SMTP, POP3, TCP-UDP, FTP, DNS   |   |  |  |
| Threat protection                       | DoS attacks, fragmented & malformed packets, blended threats & more  |   |  |  |
| VoIP                                    | H.323, SIP, call setup and session security  |   |  |  |
| Filtering options                       | Browser Safe Search, Yo  | Browser Safe Search, YouTube for Schools, Google for Business |  |  |
| Security subscriptions                  | APT Blocker, IPS, Gateway AV, WebBlocker, App Control, Data<br>Loss Prevention, Reputation Enabled Defense, Mobile Security,<br>Network Discovery, spamBlocker |   |  |  |
| VPN & AUTHENTICATION                    |  |   |  |  |
| Encryption                              | DES, 3DES, AES 128-, 192-, 256-bit   |   |  |  |
| IPSec                                   | SHA-2, IKE pre-shared key, 3rd party cert  |   |  |  |
| Single sign-on                          | Windows, Mac OS X, mobile operating systems, RADIUS  |   |  |  |
| Authentication                          | RADIUS, LDAP, Windows Active Directory, VASCO, RSA SecurID, internal database, Duo, SMS Passcode   |   |  |  |
| MANAGEMENT                              |  |   |  |  |
| Logging and notifications               | WatchGuard, Syslog, SNMP v2/v3   |   |  |  |
| User interfaces                         | Centralized console (WSM), Web UI, scriptable CLI  |   |  |  |
| Reporting                               | WatchGuard Dimension includes over 100 pre-defined reports, executive summary and visibility tools   |   |  |  |
| CERTIFICATIONS                          |  |   |  |  |
| Security                                | Pending: ICSA Firewall, ICSA IPSec VPN, CC EAL4+, FIPS 140-2   |   |  |  |
| Safety                                  | NRTL/C, CB   |   |  |  |
| Network                                 | IPv6 Ready Gold (routing   | IPv6 Ready Gold (routing)                                     |  |  |
| Hazardous substance control             | WEEE, RoHS, REACH  |   |  |  |
| NETWORKING                              |  |   |  |  |
| Routing                                 | Static, Dynamic (BGP, OSPF, RIP), Policy-based VPN   |   |  |  |
| High Availability                       | Active/passive, active/active with load balancing  |   |  |  |
| QoS                                     | 8 priority queues, DiffSe  | erv, modified strict queuing                                  |  |  |
| IP address assignment                   | Static, DHCP (server, client, relay), PPPoE, DynDNS  |   |  |  |
| NAT                                     | Static, dynamic, 1:1, IPSec traversal, policy-based, Virtual IP for server load balancing  |   |  |  |
| Link aggregation                        | 802.3ad dynamic, static, active/backup   |   |  |  |
| Other features                          | Port Independence, Multi-WAN failover and load balancing, server load balancing, transparent/drop-in mode  |   |  |  |

<sup>\*</sup>Throughput rates are dependent on network interface modules selected for your M4600 or M5600 deployment. Details available at www.watchguard.com/module.

#### **PHYSICAL AND POWER SPECIFICATIONS**

| Product Dimensions M4600     | 17" x 1.8" x 18.5" (431 x 44 x 468 mm)  |  |
|------------------------------|---|--|
| Product Dimensions M5600     | 17.4" x 1.8" x 22 (438 x 44 x 580 mm)   |  |
| Shipping Dimensions M4600    | 32" x 8.9" x 23" (795 x 225 x 595 mm)   |  |
| Shipping Dimensions M5600    | 23.5" x 8.9" x 31" (595 x 225 x 795 mm) |  |
| Shipping Dimensions 10G Mod. | 6.3" x 3.2" x 12" (160 x 80 x 300 mm)   |  |
| Shipping Weight M4600        | 38 lb (17 kg)                           |  |
| Shipping Weight M5600        | 46 lb (21 kg)                           |  |
| Shipping Weight Module       | .44 lb (.2 kg)                          |  |
| AC Power                     | 100-240 VAC Autosensing                 |  |
| Power Consumption M4600      | U.S. 300 Watts (max), 1024 BTU/hr (max) |  |
| Power Consumption M5600      | U.S. 400 Watts (max), 1365 BTU/hr (max) |  |
| Rack Mountable               | Sliding rack rails included             |  |

| ENVIRONMENT       | OPERATING                                    | STORAGE                                       |  |
|-------------------|--|---|--|
| Temperature       | 32° F to 104° F<br>0° C to 40° C             | -40° F to 158° F<br>-10° C to 70° C           |  |
| Relative Humidity | 10% to 90%<br>non-condensing                 | 10% to 90%<br>non-condensing                  |  |
| Altitude          | 0 to 9,843 ft at 95° F<br>(3,000 m at 35° C) | 0 to 15,000 ft at 95° F<br>(4,570 m at 35° C) |  |
| MTBF M4600        | 50,843 hours @ 77° F (25° C)                 |   |  |
| MTBF M5600        | 68,879 hours @ 77° F (25° C)                 |   |  |
| MTBF Module       | 3,863,276 hours @ 77° F (25° C)              |   |  |

#### STRONG SECURITY AT EVERY LAYER

Uniquely architected to be the industry's smartest, fastest, and most effective network security products, WatchGuard solutions deliver in-depth defenses against advanced malware, ransomware, botnets, trojans, viruses, drive-by downloads, data loss, phishing and much more.

## **MULTIPLE PURCHASE OPTIONS**

The flexibility of WatchGuard's integrated platform makes it easy to have exactly the security components your business network requires. Whether you choose to start with the security basics or deploy a comprehensive arsenal of network defenses, we have bundled security services to match your requirements.

## **EXPERT GUIDANCE AND SUPPORT**

An initial Support subscription comes with every Firebox M4600 and M5600 appliance. Standard Support, included in the Basic Security Suite, provides hardware warranty with advance hardware replacement, 24 x 7 technical support, and software updates. An upgrade to Gold level support is included in WatchGuard's Total Security Suite.

For details, talk to your authorized WatchGuard reseller or visit www.watchguard.com.

Throughput rates are determined using multiple flows through multiple ports and will vary depending on environment and configuration. Max firewall throughput tested using 1518 byte UDP packets based on RFC 2544 methodology.

Contact your WatchGuard reseller or call WatchGuard directly (1.800.734.9905) for help determining the right model for your network.

Visit www.watchguard.com/sizing to access the online product Sizing Tool.