


**T&B<sup>®</sup> Fittings**

**Stainless Steel Conduit**

**Available in Both Type 304 and  
Type 316 Stainless Steel for  
Superior Corrosion Protection  
in Harsh Environments.**

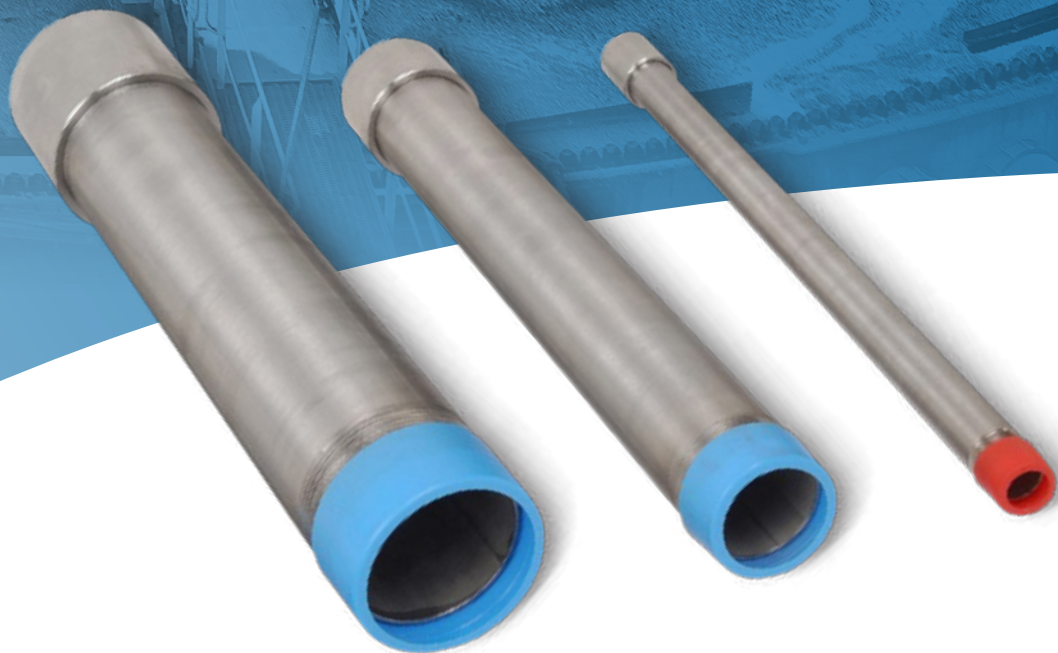

**Thomas&Betts**





## Stainless Steel Conduit

### Withstands Corrosive Environments and Meets Stringent Sanitary Requirements.

For corrosion-resistant electrical conduit systems, stainless steel offers value and performance that's hard to match, combining high corrosion, chemical and temperature resistance with strength, durability, ease of installation and low maintenance. Compared to standard galvanized steel conduit in corrosive environments, Type 304 stainless steel offers up to five times the lifespan, while Type 316 offers up to eight times the lifespan. Because it is very easy to clean and its surface has no pores or cracks to harbor bacteria and other impurities, stainless steel also provides one of the most hygienic surfaces.

- Available in both Type 304 and marine-grade Type 316 stainless steel
- Features standard NPT threads for easy installation
- Each 10-ft. length of conduit ships with one Type 316 stainless steel coupling included
- Couplings also sold separately
- Exceeds requirements for washdown applications
- Food- and potable water-safe
- Satisfies plant-cleanliness mandates from HACCP, FDA and various state agencies
- Meets ASTM A-321/SA-312 Standards
- UL®/cUL Listed

#### T&B® Fittings Stainless Steel Rigid Conduit

Cat. Number	Trade Size (in.)	Weight (lbs./ft.)	Std. Pkg. Qty.	UPC Number
<b>Type 304 Stainless Steel Conduit with Coupling</b>				
COND1/2SS	½	0.82	1,500 ft.	786209-99311
COND3/4SS	¾	1.09	1,000 ft.	786209-99312
COND1SS	1	1.61	700 ft.	786209-99313
COND11/2SS	1½	2.63	300 ft.	786209-99314
COND2SS	2	3.50	200 ft.	786209-99315
COND21/2SS	2½	5.59	120 ft.	786209-99316
COND3SS	3	7.27	90 ft.	786209-99317
COND4SS	4	10.08	40 ft.	786209-99318
<b>Type 316 Stainless Steel Conduit with Coupling</b>				
COND1/2SST	½	0.82	1,500 ft.	786209-99319
COND3/4SST	¾	1.09	1,000 ft.	786209-99320
COND1SST	1	1.61	700 ft.	786209-99321
COND11/2SST	1½	2.63	300 ft.	786209-99322
COND2SST	2	3.50	200 ft.	786209-99323
COND21/2SST	2½	5.59	120 ft.	786209-99324
COND3SST	3	7.27	90 ft.	786209-99325
COND4SST	4	10.08	40 ft.	786209-99326

Note: Conduit sold in 10-ft. lengths. Each 10-ft. length ships with one coupling.

#### T&B® Fittings Stainless Steel Couplings

Cat. Number	Trade Size (in.)	Weight (lbs./ea.)	Std. Pkg. Qty.	UPC Number
<b>Type 316 Stainless Steel Couplings</b>				
CPL1/2SST	½	0.17	100	786209-99404
CPL3/4SST	¾	0.29	50	786209-99405
CPL1SST	1	0.34	30	786209-99406
CPL11/2SST	1½	0.61	25	786209-99407
CPL2SST	2	0.90	20	786209-99408
CPL21/2SST	2½	1.87	24	786209-99409
CPL3SST	3	1.93	16	786209-99410
CPL4SST	4	3.97	10	786209-99411

#### Typical Applications

- Petrochemical refining/processing
- Water and wastewater treatment
- Food and beverage processing
- Marine and coastal facilities
- Pharmaceutical manufacturing
- Pulp and paper processing
- Other applications in corrosive environments or with strict hygiene requirements

Please ask your Thomas & Betts sales representative for a complete catalog of quality Thomas & Betts electrical products or visit us at [www.tnb.com](http://www.tnb.com). For customer service, call 1-800-816-7809. For technical questions, call 1-888-862-3289.