

Warwick

Choose the Best of British



**Over 50 years of
trailer excellence**

www.warwicktrailers.co.uk



Warwick Brothers have been manufacturing Agricultural, Car and Landrover Trailers for over 50 years, supplying both the UK and overseas markets.

The Company was originally founded by brothers Derry and Stan Warwick. It changed hands in 2003 within the family headed by myself, Chris J Jones, Managing Director of the Ceejay Systems Group of Companies, who are Recovery Vehicle Specialists I am looking forward to both maintaining and developing both the quality of build and service during the coming years.

We adopt a 21st Century approach to production techniques, combining the latest computer aided design technology with sound engineering experience, with the result that the Warwick Trailer range is one of the best available. At Warwick Trailers we use the best materials and components on the market and together with our committed, skilled and efficient workforce, our aim is to produce the highest quality trailers built to customer requirements.

This brochure is designed to give an overview of our product range, with many popular variations listed. If you would like more information, or wish to discuss any specific individual requirements, please do not hesitate to contact our sales office by email or telephone.

Chris J Jones.

Warwick



WARWICK Trailers now have full braking efficiency test equipment installed in their workshops. Customers buying **WARWICK** will be assured that the braking system conforms to current legislation.

GUARANTEED

High Dump

Built with high sides and a high rear pivot. This means the load is higher when unloaded, taking up less room. It can be fitted with a tailgate and grain funnels.



Contractor Dump

This is a heavy duty low sided trailer that can have a tailgate or scow end, very popular on construction sites or for general purpose use.



Construction Dump

This trailer the most robust version of the dump range. Built with a 6mm floor and 6mm sides it is designed for the most demanding of uses.



Warwick

MONO



4 TONNE ref WB4M

3.048m(10') Long x 1.905m(6'3") Wide
with 0.915m(3') High Sides.
4mm Floors with 3mm Sides.
One 60mm x 6 Stud Axle.
250 x 60 Hydraulic Cam Operated Brakes.
Parking Brake.
11/80 x 15.3 x 12 Ply Wheels.
Viewing Ladder.
Lights to RTA Standard.

5 TONNE ref WB5M

3.353m(11') Long x 2.273m(7'5.5") Wide
with 0.915m(3') High Sides.
4mm Floors with 3mm Sides.
One 60mm x 6 Stud Axle.
300 x 60 Hydraulic Cam Operated Brakes.
Parking Brake.
11/80 x 15.3 x 12 Ply Wheels.
Viewing Ladder.
Lights to RTA Standard.

6 TONNE ref WB6M

3.658m(12') Long x 2.273m(7'5.5") Wide
with 1.067m(3'6") High Sides.
4mm Floors with 3mm Sides.
One 70mm x 6 Stud Axle.
300 x 60 Hydraulic Cam Operated Brakes.
Parking Brake.
Two 12/80 x 15.3 x 14 Ply Wheels.
Viewing Ladder.
Lights to RTA Standard.

8 TONNE ref WB8M

4.267m(14') Long x 2.273m(7'5.5") Wide
with 1.3m(4'3") High Sides.
4mm Floors with 3mm Sides.
Two 60mm x 6 Stud Axles.
300 x 60 Hydraulic Cam Operated Brakes.
Parking Brake.
Four 11/80 x 15.3 x 12 Ply Wheels.
Viewing Ladder.
Lights to RTA Standard.

10 TONNE ref WB10M

4.877m(16') Long x 2.273m(7'5.5") Wide
with 1.3m(4'3") High Sides.
4mm Floors with 3mm Sides.
Two 70mm x 6 Stud Axles.
300 x 60 Hydraulic Cam Operated Brakes.
Parking Brake.
Four 12/80 x 15.3 x 14 Ply Wheels.
Viewing Ladder.
Lights to RTA Standard.

11 TONNE ref WB11M

5.182m(17') Long x 2.273m(7'5.5") Wide
with 1.3m(4'3") High Sides.
4mm Floors with 3mm Sides.
Two 90mm x 10 Stud Axles
400 x 80 Hydraulic Cam Operated Brakes.
Parking Brake.
Four 15/22.5 Remould Super Singles.
Viewing Ladder.
Lights to RTA Standard.

12 TONNE ref WB12M

5.485m(18') Long x 2.273m(7'5.5") Wide
with 1.3m(4'3") High Sides.
4mm Floors with 3mm Sides.
Two Commercial Axles (10 Stud).
406 x 120 Hydraulic "S" Type Brakes.
Leaf Sprung Drawbar.
Four 15/22.5 Remould Super Singles.
Viewing Ladder. Parking Brake.
LED Lights to RTA Standard
Mudguards

OPTIONS

Manual, Auto or Hydraulic Tailgate.
Sliding Grain or Potato Chute
Rocker Beam or Sprung Axles.
Mudguards.
Coil or Leaf Sprung Drawbar.
Rope Hooks.
Tapered Bodies 100mm(4")
Toolbox
LED Rear Flashing Lights

WHEEL OPTIONS
See "Wheel Options" Page

Warwick

BALE/PALLET



4 TONNE ref WB4B

5.484m(18') Long x 2.465m(8'1") Wide.
3mm Floors.
60mm x 6 Stud Axle.
300 x 60 Hydraulic Cam Operated Brakes.
Parking Brake.
Two 11/80 x 15.3 x 12 Ply Wheels.
Harvest Ladders (Front and Rear).
Rope Hooks.
Lights to RTA Standard.

6 TONNE ref WB6B

6.096m(20') Long x 2.465m(8'1") wide
3mm Floors.
70mm x 6 Stud Axle.
300 x 60 Hydraulic Cam Operated Brakes.
Parking Brake.
Two 12/80 x 15.3 x 12 Ply Wheels.
Harvest Ladders (Front and Rear).
Rope Hooks.
Lights to RTA Standard.

8 TONNE ref WB8B

6.705m(22') Long x 2.465m(8'1") Wide
3mm Floors.
Two 60mm x 6 Stud Axles.
300 x 60 Hydraulic Cam Operated Brakes.
Parking Brake.
Four 11/80 x 15.3 x 12 Ply Wheels.
Harvest Ladders (Front and Rear).
Rope Hooks.
Lights to RTA Standard.

10 TONNE ref WB10B

7.620m(25') Long x 2.465m(8'1") wide
3mm Floors.
Two 70mm x 6 Stud Axles.
300 x 60 Hydraulic Cam Operated Brakes.
Parking Brake.
Four 12/80 x 15.3 x 12 Ply Wheels.
Harvest Ladders (Front and Rear).
Rope Hooks.
Lights to RTA Standard.

OPTIONS

Narrow Bodies.
Platforms from 15' to 36'.
Treadplate Flooring.
Coil Sprung Drawbar.
20" Detachable Headboard.
Rear Low Round Bale Support.
Sockets in Side Raves.
Bale Extension.
Mudguards.
Rotating or LED Light at Rear
Screwjack (Bolt On).
Extra Rope Hooks (Front/Back)
Curtain Sides.
Toolbox

WHEEL OPTIONS

See "Wheel Options" Page

Warwick

12/14 Tonne Bale/Pallet



12 TONNE ref WB12B

8.534m(28') Long x 2.465m(8'1") Wide.
Treadplate Floors.
Heavy Duty Side Raves.
Coil Sprung Drawbar.
Two 90mm x 10 Stud Axles.
400 x 80 Hydraulic Cam Operated Brakes.
Parking Brake.
Four 15/22.5 Commercial Quality Remould Wheels.
Heavy Duty Harvest Ladders (Front and Rear).
Rope Hooks.
LED Lights to RTA Standard.

14 TONNE ref WB14B

9.145m(30') Long x 2.465m(8'1") Wide.
Treadplate Floors.
Heavy Duty Side Raves.
Leaf Sprung Drawbar.
Two 127mm x 10 Stud Commercial Axles.
406 x 120 Hydraulic "S" Cam Operated Brakes.
Parking Brake.
Four 15/22.5 Commercial Quality Remould Wheels.
Heavy Duty Harvest Ladders (Front and Rear).
Rope Hooks.
LED Lights to RTA Standard.
Mudguards.

14 TONNE FASTMASTER ref WB14BFM

9.145m(30') Long x 2.465m(8'1") Wide.
Treadplate Floors.
Heavy Duty Side Raves.
Leaf Sprung Drawbar.
Two 127mm x 10 Stud Commercial Axles.
406 x 120 Air/Hydraulic Cam Operated Brakes.
A.B.S.
Load Sensor Valve.
Swivel Drawbar Hitch.
Chevrons.
Mudguards.
Parking Brake.
Four 15/22.5 Commercial Quality Remould Wheels.
Heavy Duty Harvest Ladders (Front and Rear).
Rope Hooks.
LED Lights to RTA Standard.

OPTIONS

Narrow Bodies.
Platforms from 15' to 36'.
Smooth Flooring.
Coil Sprung Drawbar.
20" Detachable Headboard.
Special Low Round Bale Support.
Sockets in Side Raves.
Bale Extension.
Mudguards.
Beacon or LED Light at Rear
Screwjack (Bolt On).
Extra Rope Hooks (Front/Back).
Curtain Sides.
Toolbox.

WHEEL OPTIONS

See "Wheel Options" Page



**14 Tonne Bale/Pallet
Double and Triple axle
with Turncarriage**



WB14BTA

5.485m(18') to 10.972m(36') Length.
406x120x127mm Commercial Axles (10 Stud).
Multistroke Parking Brake.
Air and Hydraulic Braking System.
A.B.S. c/w Load Sensor Valve.
Compensated Sprung Suspension.
Six 15/22.5 Remould Wheel Assemblies.
Mudguards/Chevrons.
Swivel Drawbar Hitch.
Treadplate floor
Headboard or Harvest Ladders.
Lights to R.T.A. Specification.
Painted Blue.

WB14BDA

5.485m(18') to 10.972m(36') Length.
406x120x127mm Commercial Axles (10 Stud).
Multistroke Parking Brake.
Hydraulic Braking System.
Compensated Sprung Suspension.
Four 15/22.5 Remould Wheel Assemblies.
Mudguards.
Headboard or Harvest Ladders.
Lights to R.T.A. Specification.
Painted Blue.

Options

Extra Rope Hooks.
Flotation Tyres.
Round Bale Back Bar.
Sockets in Side Raves.
Led Flashing Beacon to Rear.
Curtain Sides.
Bale Extension.
Air Brakes c/w ABS, Shunt Valve.
Hydraulic Load Sensor.
Toolbox.

Warwick

DROPSIDE RANGE



3 TONNE ref WB3D

2.743m(9') Long x 1.575m(5'2") Wide
with 0.457m(1'6") High Sides.
3mm Floors with 2mm Sides.
One 55mm x 6 Stud Axle.
250 x 50 Hydraulic Cam Operated Brakes.
Parking Brake.
10.00 x 15.3 x 10 Ply Wheels.
Lights to RTA Standard.

4 TONNE ref WB4D

3.048m(10') Long x 1.892m(6'2.5") Wide
with 0.457m(1'6") High Sides.
3mm Floors with 2mm Sides.
One 60mm x 6 Stud Axle.
250 x 60 Hydraulic Cam Operated Brakes.
Parking Brake.
10.00 x 15.3 x 10 Ply Wheels.
Lights to RTA Standard.

5 TONNE ref WB5D

3.353m(11') Long x 2.273m(7.5") Wide
with 0.457m(1'6") High Sides.
3mm Floors with 2mm Sides.
One 60mm x 6 Stud Axle.
300 x 60 Hydraulic Cam Operated Brakes.
Parking Brake.
11/80 x 15.3 x 12 Ply Wheels.
Lights to RTA Standard.

6 TONNE ref WB6D

3.658m(12') Long x 2.273m(7.5") Wide
with 0.533m(1'9") High Sides.
4mm Floors with 2.5mm Sides.
One 70mm x 6 Stud Axle.
300 x 60 Hydraulic Cam Operated Brakes.
Parking Brake.
12/80 x 15.3 x 14 Ply Wheels.
Lights to RTA Standard.

8 TONNE ref WB8D

4.267m(14') Long x 2.273m(7.5") Wide
with 0.635m(2'1") High Sides.
4mm Floors with 2.5mm Sides.
Two 60mm x 6 Stud Axle.
300 x 60 Hydraulic Cam Operated Brakes.
Parking Brake.
11/80 x 15.3 x 12 Ply Wheels.
Lights to RTA Standard.

10 TONNE ref WB10D

4.877m(16') Long x 2.273m(7.5") Wide
with 0.635m(2'1") High Sides.
4mm Floors with 2.5mm Sides.
Two 70mm x 6 Stud Axle.
300 x 60 Hydraulic Cam Operated Brakes.
Parking Brake.
12/80 x 15.3 x 14 Ply Wheels.
Lights to RTA Standard.

OPTIONS

Manual, Auto or Hydraulic Tailgate.
Sliding Grain or Potato Chute
Rocker Beam or Sprung Axles.
Mudguards.
Hardwood Floor.
Bale Extension.
Ladders.
Sprung Suspension (4-6 Tonne).
Coil or Leaf Sprung Drawbar.
Extra Rope Hooks.
Tapered Bodies 100mm(4")
Toolbox.
LED Flashing Rear Light.

WHEEL OPTIONS

See "Wheel Options" Page

Warwick

Silage



Silage Conversions can be fitted to all Mono and Dropside Trailers, from 4 Tonne to 16 Tonne.

They come as a standard Side Load, with a Front Loading Option. The extra Side Load Top Panel can be moved to either side of the trailer for loading Offside or Nearside.

Manual, Auto or Hydraulic options are available on all models.

4 TONNE

Height: 763mm(30")
Capacity: 8.82Cu M

5 TONNE

Height: 763mm(30")
Capacity: 11.69Cu M

6 TONNE

Height: 763mm(30")
Capacity: 13.90Cu M

8 TONNE

Height: 763mm(30")
Capacity: 18.30Cu M

10 TONNE

Height: 763mm(30")
Capacity: 20.95Cu M

12 TONNE

Height: 763mm(30")
Capacity: 23.55Cu M

14 TONNE

Height: 763mm(30")
Capacity: 28.90Cu M

16 TONNE

Height: 763mm(30")
Capacity: 34.45Cu M



10 TONNE ref WB10M

4.267m(14') Long x 2.440m(8') Wide
with 1.3m(4'3") High Sides.

4mm Floors with 3mm Sides.

Two 80mm x 8 Stud Axles.

350 x 60 Hydraulic Cam Operated Brakes.

Parking Brake.

Four 15/22.5 Remould Super Single Wheels.

Viewing Ladder.

Lights to RTA Standard.

OPTIONS

Manual, Auto or Hydraulic Tailgate.

Sliding Grain or Potato Chute.

Rocker Beam or Sprung Axles.

Mudguards.

Coil Sprung Drawbar.

Rope Hooks.

Tapered Bodies 100mm(4").

10 Stud Axles.

Rear Extension Chute.

Rear Hydraulic Support Legs.

Hi Cube version available.

LED Flashing Rear Light.

Toolbox.



WHEEL OPTIONS

See "Wheel Options" Page



warwick



FASTMASTER

Hydraulic Tailgate with Both Hydraulic and Mechanical Locking

Roll Over Sheet (Rolls both sides)

4mm Floor and 3mm Sides (Upgrades Available)

Choice of Front Viewing Windows

Air/Hydraulic Brakes c/w A.B.S and Load Sensing and Shunt Valve

Leaf Sprung Drawbar

LED Lights

Commercial 10 Stud 420 x 180 Braked Axles

50D High Yield Chassis Members

Chrome Lift Rams

Swivel Hitch

Galvanised Wheel Arches (Replacable)

Choice of Tyres

Galvanised Ladder and Hose Tidy

All Fastmasters have certificated braking systems and a 2yr warranty

Can also be supplied from
DOMEX
HIGH STRENGTH STEEL





14 TONNE MONO GRAIN

INTERNAL LENGTH 6.645M
WIDTH 2.15M
HEIGHT OF SIDES 1.3M
CUBIC CAPACITY 18.6 Cu M
MAX. HEIGHT WHEN TIPPED 7.95M
4MM FLOOR WITH 3MM SIDES
Two COMMERCIAL 10 STUD AXLES
420x180 HYDRAULIC "S" CAM BRAKES.
c/w MULTISTROKE PARKING BRAKE
COMPENSATED SPRUNG SUSPENSION
LEAF SPRUNG DRAWBAR
FOUR 15/22.5 REMOULD WHEEL ASSEMBLIES
50MM TOW HITCH
FRONT VIEWING LADDER
LED LIGHTS TO RTA SPECIFICATION
MUDGUARDS

14 TONNE MONO ROOTCROP

INTERNAL LENGTH 7.320M
WIDTH 2.440M
HEIGHT OF SIDES 1.170M
CUBIC CAPACITY 18.4 Cu M
MAX. HEIGHT WHEN TIPPED 8.3M
4MM FLOOR WITH 3MM SIDES
Two COMMERCIAL 10 STUD AXLES
420x180 HYDRAULIC "S" CAM BRAKES.
c/w MULTISTROKE PARKING BRAKE
COMPENSATED SPRUNG SUSPENSION
LEAF SPRUNG DRAWBAR
FOUR 15/22.5 REMOULD WHEEL ASSEMBLIES
50MM TOW HITCH
FRONT VIEWING PANEL c/w PERSPEX INFILL
LED LIGHTS TO RTA SPECIFICATION
MUDGUARDS

14 TONNE MONO FASTMASTER

INTERNAL LENGTH 6.645M
WIDTH 2.15M
HEIGHT OF SIDES 1.3M
CUBIC CAPACITY 18.6 Cu M
MAX. HEIGHT WHEN TIPPED 7.95M
4MM FLOOR WITH 3MM SIDES
TWO 127MM X 10 STUD AXLES
420 X 180 "S" TYPE CAM BRAKES OPERATED
BY TWO LINE AIR AND HYDRAULIC
c/w MULTISTROKE PARKING BRAKE
A.B.S. c/w LOAD SENSOR VALVE.
COMPENSATED SPRUNG SUSPENSION
LEAF SPRUNG DRAWBAR
FOUR 15/22.5 REMOULD WHEEL ASSEMBLIES
FRONT VIEWING PANEL c/w PERSPEX INFILL
MUDGUARDS
CHEVRONS
SWIVEL DRAWBAR HITCH
LED LIGHTS TO RTA SPECIFICATION

16 TONNE MONO GRAIN OR ROOTCROP FASTMASTER

INTERNAL LENGTH 7.320M
WIDTH 2.440M
HEIGHT OF SIDES:
GRAIN 1.3M (23.2 Cu M)
ROOTCROP 1.170M (21.1 Cu M)
MAX. HEIGHT WHEN TIPPED 8.3 M
4MM FLOOR WITH 3MM SIDES
TWO 127MM X 10 STUD AXLES
420 X 180 "S" TYPE CAM BRAKES OPERATED
BY TWO LINE AIR AND HYDRAULIC
c/w MULTISTROKE PARKING BRAKE
A.B.S. c/w LOAD SENSOR VALVE
COMPENSATED SPRUNG SUSPENSION
LEAF SPRUNG DRAWBAR
15/22.5 REMOULD WHEEL ASSEMBLIES
FRONT VIEWING PANEL c/w PERSPEX INFILL
MUDGUARDS / CHEVRONS
SWIVEL DRAWBAR HITCH
LED LIGHTS TO RTA SPECIFICATION

Warwick

HIGH DUMP



6 TONNE ref WB6HD

3.658m(12') Long x 2.273m(7'5.5") Wide
with 1.067m(3'6") High Sides.
4mm Floors with 3mm Sides.
Two 60mm x 6 Stud Axles.
300 x 60 Hydraulic Cam Operated Brakes.
Parking Brake.
Four 11/80 x 15.3 x 12 Ply Wheels.
Viewing Ladder.
Lights to RTA Standard.
Mudguards.

8 TONNE ref WB8HD

4.267m(14') Long x 2.273m(7'5.5") Wide
with 1.170m(3'10") High Sides.
4mm Floors with 3mm Sides.
Two 70mm x 6 Stud Axles.
300 x 60 Hydraulic Cam Operated Brakes.
Parking Brake.
Four 12/80 x 15.3 x 14 Ply Wheels.
Viewing Ladder.
Lights to RTA Standard.
Mudguards.

10 TONNE ref WB10HD

4.877m(16') Long x 2.273m(7'5.5") Wide
with 1.220m(4') High Sides.
4mm Floors with 3mm Sides.
Two 70mm x 6 Stud Axles.
300 x 60 Hydraulic Cam Operated Brakes.
Parking Brake.
Four 400x60x15.5 Tyres
Viewing Ladder.
Lights to RTA Standard.
Mudguards.

12 TONNE ref WB12HD

5.485m(18') Long x 2.273m(7'5.5") Wide
with 1.290m(4'3") High Sides.
4mm Floors with 3mm Sides.
Two Commercial Axles (10 Stud)
406 x 120 Hydraulic "S" Type Brakes.
Parking Brake.
Four 15/22.5 Remould S/ Singles.
Viewing Ladder.
Leaf Sprung Drawbar.
Mudguards.
LED Lights to RTA Standard.

FASTMASTER ref WB14HDFM

5.485m(18') Long x 2.440m(8')
Wide with 1.3m(4'3") High Sides.
Leaf Sprung Drawbar.
Two 127mm x 10 Stud Axles.
420 x 180 "S" Cam Brakes Operated
by Two Line Air and Hydraulic.
A.B.S.
Load Sensor Valve.
Swivel Drawbar Hitch.
Chevrons.
Mudguards.
Parking Brake.
Four 15/22.5 Remould S/ Singles.
LED Lights to RTA Standard.

OPTIONS

Manual, Auto or Hydraulic Tailgate.
Sliding Grain or Potato Chute.
Rocker Beam or Sprung Axles.
Mudguards.
Coil or Leaf Sprung Drawbar.
Rope Hooks.
Tapered Bodies 100mm(4")
6mm and 8mm Floors.
6mm Sides.
Toolbox.
LED Flashing Rear Light.

WHEEL OPTIONS

See "Wheel Options" Page

Warwick

CONTRACTOR DUMP



4 TONNE ref WB4C

3.048m(10') Long x 1.905(6'3") Wide
with 0.457(1'6") High Sides.
5mm Floors with 4mm Sides.
One 60mm x 6 Stud Axle.
250 x 60 Hydraulic Cam Operated Brakes.
Parking Brake.
11/80 x 15.3 x 12 Ply Wheels.
Lights to RTA Standard.

5 TONNE ref WB5C

3.353m(11') Long x 2.273m(7'5.5") Wide
with 0.457m(1'6") High Sides.
5mm Floors with 4mm Sides.
One 60mm x 6 Stud Axle.
300 x 60 Hydraulic Cam Operated Brakes.
Parking Brake.
11/80 x 15.3 x 12 Ply Wheels.
Lights to RTA Standard.

6 TONNE ref WB6C

3.658m(12') Long x 2.273m(7'5.5") Wide
with 0.533m(1'9") High Sides.
5mm Floors with 4mm Sides.
One 70mm x 6 Stud Axle.
300 x 60 Hydraulic Cam Operated Brakes.
Parking Brake.
Two 12/80 x 15.3 x 14 Ply Wheels.
Lights to RTA Standard.

8 TONNE ref WB8C

4.267m(14') Long x 2.273m(7'5.5") Wide
with 0.635m(2'1") High Sides.
5mm Floors with 4mm Sides.
Two 60mm x 6 Stud Axles.
300 x 60 Hydraulic Cam Operated Brakes.
Parking Brake.
Four 12/80 x 15.3 x 14 Ply Wheels.
Lights to RTA Standard.

10 TONNE ref WB10C

4.877m(16') Long x 2.273m(7'5.5") Wide
with 0.635m(2'1") High Sides.
5mm Floors with 4mm Sides.
Two 70mm x 6 Stud Axles.
300 x 60 Hydraulic Cam Operated Brakes.
Parking Brake.
Four 400 x 60 x 15.5 Ply Wheels
Lights to RTA Standard.

11 TONNE ref WB11C

5.182m(17') Long x 2.273m(7'5.5") Wide
with 0.635m(2'1") High Sides.
5mm Floors with 4mm Sides.
Two 90mm x 10 Stud Axles.
400 x 80 Hydraulic Cam Operated Brakes.
Parking Brake.
Four 15/22.5 Remould Super Singles.
Lights to RTA Standard.

12 TONNE ref WB12C

5.485m(18') Long x 2.273m(7'5.5") Wide
with 0.635(2'1") High Sides.
5mm Floors with 4mm High Sides.
Two Commercial Axles (10 Stud).
406 x 120 Hydraulic "S" Type Brakes.
Leaf Sprung Drawbar.
Four 15/22.5 Remould Super Singles.
Parking Brake.
LED Lights to RTA Standard

OPTIONS

Manual, Auto or Hydraulic Tailgate.
Sliding Grain or Potato Chute
Rocker Beam or Sprung Axles.
Mudguards.
Coil or Leaf Sprung Drawbar.
Rope Hooks.
Tapered Bodies 100mm(4")
6mm and 8mm Floors.
6mm Sides.
Toolbox.
LED Rear Flashing Light.

WHEEL OPTIONS

See "Wheel Options" Page

Warwick

10 Cubic Metre



**16Ton High Volume
Construction Dump**

WB14CD

4.877m(16ft Long).

1.016m(3ft 4in) High Sides.

8mm Floor.

6mm Sides.

420x180 Braked Commercial Axles (10stud).

385x65x22.5 Tyres.

Springs.

Mudguards.

Leaf Sprung Drawbar.

LED Lights.

Options

Hydraulic Tailgate.

Auto Tailgate.

Air/Hydraulic Braking c/w ABS/Load Sensing.

Rockerbeam Axles.

Toolbox.

LED Rear Flashing Light.


16Ton High Volume
10 Cubic Metre

GROUNDHOG

Length 4.877m(16') Width 2.465m(8'1").
Payload 7000KG.
Treadplate Flooring.
90mm 10 Stud Axle
400 x 80 Hydraulic Cam Operated Brakes.
Parking Brake.
Two 15/22.5 Commercial Quality Remould Wheels.
Twin Hydraulic Lift Rams.
Drive On Loading c/w Loading Chocks.
Loading Height 180mm(7").
Lights to RTA Standard.

OPTIONS

Mudguards.
Steering Axle.
Detachable Headboard.
Rotating Beacon or LED Light at Rear.

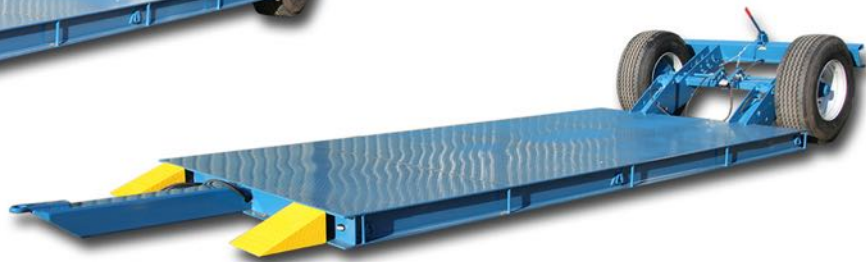



1 TONNE ref WB401

1.981(6'6") Long x 1.220m(4') Wide
with 0.381m(1'3") High Sides.
45mm Unbraked Axle.
23 x 850 x 12 Wheels.
30mm Eye and Screwstand.

2 TONNE ref WB402

2.540m(8'4") Long x 1.575(5'2") Wide
with 0.381m(1'3") High Sides.
50mm x 5 Stud Axle.
200 x 40 Cam Operated Brakes.
Parking Brake.
10.00x12x12 Wheels
50mm Eye and Screwjack.



OPTIONS

Extension Sides
(Weldmesh or Infilled).
Overrun Brakes (2 Tonne).
Lights.
Road Springs (2 Tonne).
Mudguards.
Hydraulic Brakes (2 Tonne).
Extra Rope Hooks.

WHEEL OPTIONS

See "Wheel Options" Page

4 TONNE 3 WAY TIPPER (TRI-TIP)



3.084m(10') Long x 1.892m(6'2.5") Wide with 0.457m(1'6") High Dropsides.
All Sides Top Hung c/w Quick Release Bars.
One 60 x 6 Stud Axle.
250 x 60 Hydraulic Cam Operated Brakes.
Parking Brake.
Two 10.00 x 15.3 x 10 Ply Wheels.
Rope Hooks.
Lights to RTA Standard.

OPTIONS

Extension Sides (Infilled or Mesh).
Road Springs.
Mudguards.
Extra Rope Hooks.
Bale Extension.
Ladders.

4 TONNE HARDWOOD



3.084m(10') Long x 1.892m(6'2.5") Wide with 0.457m(1'6") High Dropsides.
Drop Down Sides/Tailgate.
One 60 x 6 Stud Axle.
250 x 60 Hydraulic Cam Operated Brakes.
Parking Brake.
Two 10.00 x 15.3 x 10 Ply Wheels.
Rope Hooks.
Lights to RTA Standard.

WHEEL OPTIONS

See "Wheel Options" Page

PERSONNEL CARRIER



Seating for up to
30 people



Folding access step



Wheelchair lift option



Warwick

Warwick

DONKEY TRAILER

2ton Capacity

8ft Long by 1ft 6in High Sides

10.00x75x15.3 Tyres

6stud Axle with Handbrake

Top Hinged, Removable Tailgate



Options

Steel Mudguards

Lights

Screwjack

Mesh Sides

Loading Ramp

Rope Hooks

Galvanised



Warwick

WATER BOWSERS



10,000 to 13,000ltr



Fuel Bowers

6,000 to 10,000ltr

Warwick



*The WARWICK
Dung Trailer*



*Spring assisted
one piece
loading ramp*



*Side opening
rear door*

Hydraulic brakes and lights as standard



*Capacity from 4ton to 20ton
Platform Length from 10ft to 36ft
Single, Double or Triple Axles
Standard Agri Axles or Commercial
Fixed or Sprung Drawbars
2ft Fixed Headboard
Treadplate, Softwood or Hardwood Floors
LED Lights*

*Sprung Loaded Ramps
Hydraulic Ramps
Bi-Fold Ramps*

*Hydraulic Beavertail
Rear Stabilisor Legs*

*Toolbox
Spare Wheel
Various Winch Options*

Air/Hydraulic Brakes including ABS and Load Sensing

Removable Wedge for Beavertail

Wheel Options
*400x60x15.5
435x50x22.5
215x75Rx17.5
235x75Rx17.5*

2 TONNE

10.00x12x12(STD)
11.80x15.3x12Ply
15x55x17 (Flotation)
275x65Rx16
26x12x12 (Grass Tyres)

4 TONNE

10.00x15.3x12Ply (STD)
11.80x15.3x12Ply
12.80x15.3x14Ply
15x55x17 (Flotation)
275x65Rx16Ply

5 TONNE

11.80x15.3x12Ply (STD)
12.80x15.3x14Ply
15x55x17 (Flotation)
275x65Rx16
340x65Rx18

6 TONNE

12.80x15.3x14Ply (STD)
340x65x18 (Michelin)
15x55x17 (Flotation)
400x60x15.5

8 TONNE

11.80x15.3x12Ply (STD)
12.80x15.3x14Ply
340x65Rx18 (Michelin)
275x65 (Michelin)
15x55x17 (Flotation)
400x60x15.5 (Flotation)

10 TONNE

12.80x15.3x14Ply (STD)
340x65Rx18 (Michelin)
15x55x17 (Flotation)
400x60x15.5 (Flotation)
385x65x22.5 (Remould S/S)

11 TONNE

385x65x22.5 (STD)
340x65Rx18 (Michelin)
435x50Rx19.5 (Semi-Flotation)
550x45Rx22.5 (Flotation)

12/14 TONNE

385x65x22.5 (STD)
435x45x19.5 (Semi-Flotation)
550x45x22.5 (Flotation)

14 TONNE

560x45x22.5
560x60x22.5
600x50x22.5



BALE/PALLET (Floor Heights)

4,6,8 and 10TONNE

11/80 x 15.3 x 12Ply 1.015m(40")

12/80 x 15.3 x 14Ply 1.015m(40")

335 x 65 x 18 1.040(41")

15/22.5 S/Singles 1.170(46")

12 and 14TONNE

15/22.5 S/Singles 1.194m(47")

435 x 50R x 19.5 1.048m(41")

550 x 55 x 22.5

VOLUMES (Mono Grain)

4 TONNE 5.4Cu M

5 TONNE 7Cu M

6 TONNE 9Cu M

8 TONNE 12.6Cu M

10 TONNE 14.5Cu M

11 TONNE 15.4Cu M

12 TONNE 16.3Cu M

14 TONNE 18.6Cu M

16 TONNE 23.2Cu M

OVERALL HEIGHT (Mono Grain)

10 TONNE 2.31m(7'7") Untipped 5.48m(18') Tipped

11 TONNE 2.62m(8'7") Untipped 5.72m(18'9") Tipped

12 TONNE 2.59m(8'6") Untipped 2.59m(20'2") Tipped

14 TONNE 2.62m(8'7") Untipped 7.95m(26'1") Tipped

16 TONNE 2.62m(8'7") Untipped 8.30m(27'3") Tipped