

Stevens Belting Limited

STANDARD RUBBER BELTING

For more information or any products not featured please contact us at:

Tel: 0121 271 0047

Fax: 0178 854 7328


Email: info@stevensbeltingltd.co.uk

Web: www.stevensbelting.co.uk

**STANDARD
RUBBER BELTING**

**Stevens
Belting Limited**

Standard Rubber Belting Configuration

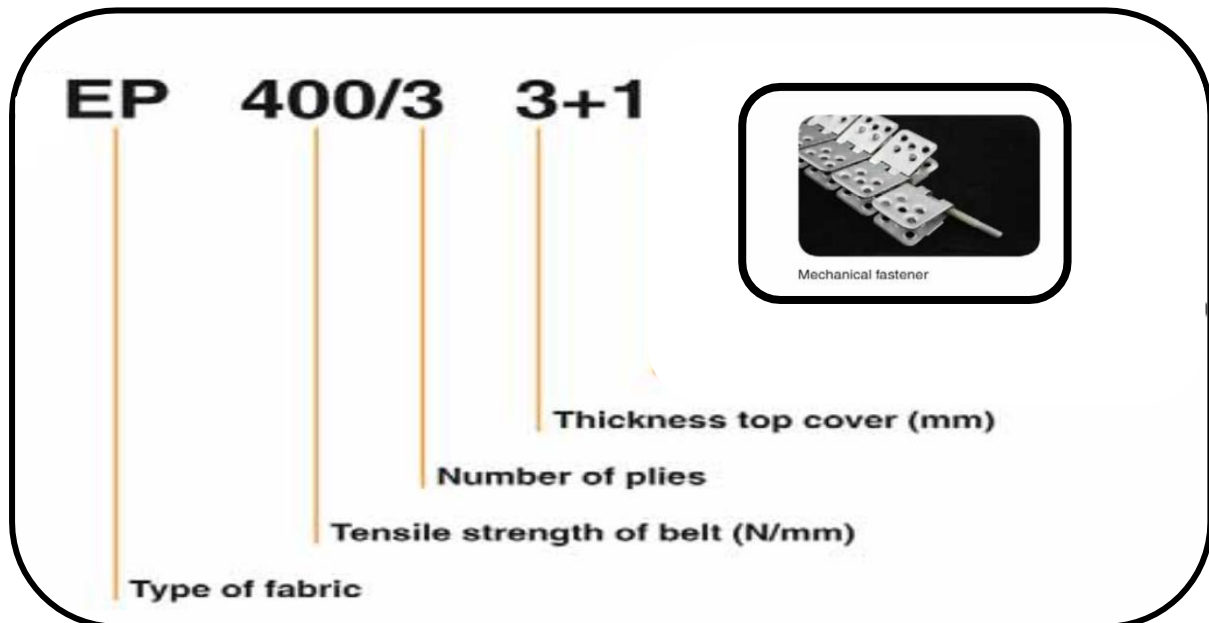

EP = Type of Fabric - Polyester

400 = Tensile Strength N/mm

/3 = Number of plies

3 = Top cover thickness (mm)

+ 1¹/₂ = Bottom cover thickness (mm)*


*Bottom cover thickness of '+ 0' represents 'no rubber cover' meaning a 'fabric (dry) back'.

All methods of joining your belt are available both 'in house' and at your site. 'Hot Vulcanised' and Chemical 'Cold joint'.


Fasteners can be pre-fitted or installed on site.

Standard Rubber Belting Configuration

Description	Overall thickness	Working tension	Weight	Min drum diameters		
	mm	N/mm	Kg/m ²	Drive	Tail	Snub
EP 250/2 2+0	3.15	25	3	160	160	125
EP 250/2 2+1	5.5	25	6.5	250	250	200
EP 315/3 2+0	3.25	32	3.5	200	200	160
EP 315/2 3+1 ¹ / ₂	7	32	8	320	250	200
EP 315/3 3+1 ¹ / ₂	8	32	8.5	320	320	250
EP 400/3 2+0	3.45	40	4	200	200	160
EP 400/3 3+1 ¹ / ₂	8	40	9	350	320	250
EP 400/3 4+2	9.5	40	12	400	320	250
EP 500/3 5+1 ¹ / ₂	10	50	12.5	400	320	320
EP 630/4 5+1 ¹ / ₂	12.5	50	15	500	400	320
EP 800/5 6+2	14.5	85	18	650	500	400

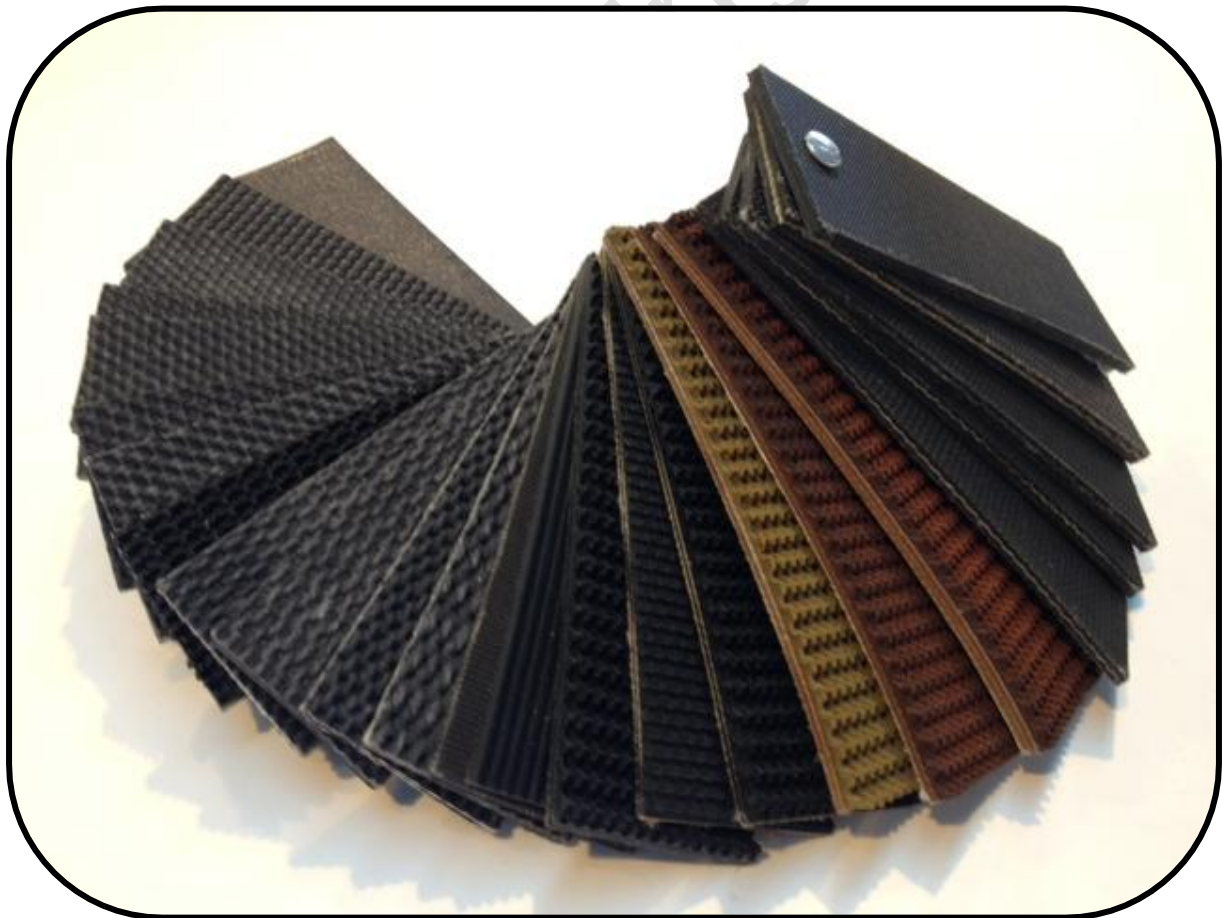

Standard Rubber Belting Configuration

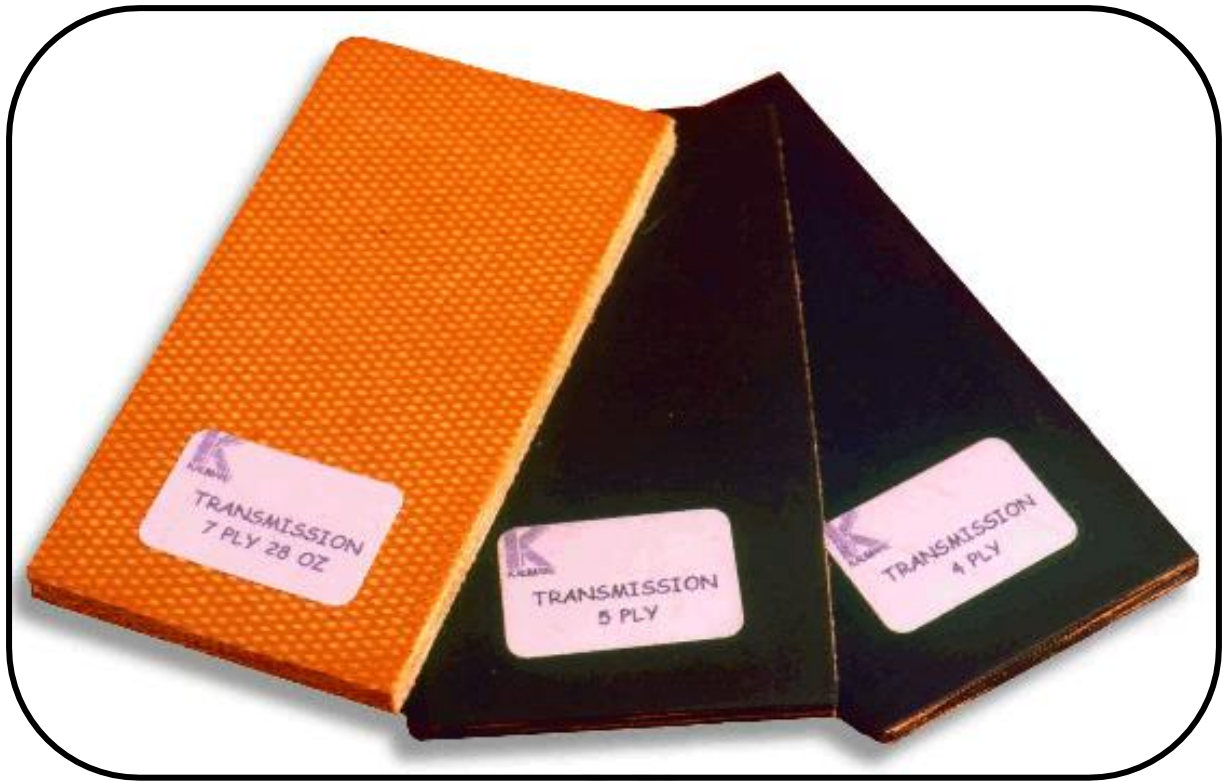

A wide variety of Rubber based Transmission and drive belts are available, for our latest stock or to discuss a particular application please call one of our team on:

Office: 0121 271 0047

Email: info@stevensbeltingltd.co.uk

Standard Rubber Belting Configuration

ROUGH-TOP

Rubber conveyor belts with grip profile for raising:


- Boxes/packages
- Bags
- Crates
- Etc.

The lightweight/flexible profile and the belt constructions allow small drum diameters.

	kg/m ²	D min (mm)
V/EP 250/2 RT+0 Black	6,6	100
V/EP 250/2 RT+0 Beige	6,6	100
V/EP 400/3 RT+0 Black	7,9	125
V/EP 400/3 RT+0 Beige	7,9	125


Other belt constructions on request.
Also available with a rubber undercoat.

Rough-Top (RT)




Also available with the following profiles:


Diamond



Mini Rough-Top



Fine Grip (FG)



A variety of top surface profiles are available in many differing patterns and colours, for the latest developments please do not hesitate to contact us.

For more information on these or any other product either visit our website where you will be able to download the latest information or call:

Office: 0121 271 0047

Email: info@stevensbeltingltd.co.uk