


Bi-directional Jetting Head Pigs

www.ik-uk.com

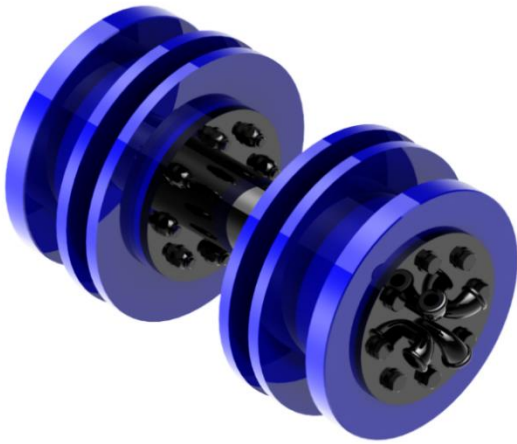

Designed for use in pipelines where large amounts of debris and deposits may be present, IK-UK's range of jetting head pigs offer excellent cleaning qualities.

Available in size 6" through to 60", the standard model is supplied as a multi bolt design with six polyurethane discs: two support/guide discs, four sealing discs and jetting head assembly.

The pig performs as any utility pig does until it encounters a restriction, this causes the differential pressure across the pig to increase and liquid is forced out through the adjustable nozzles flushing the debris away, the pig then continues in the normal fashion.

Option of a pressure relief valve fitted to regulate the jetting flow if required.

- As standard all IK-UK's pigs are designed to pass minimum 1.5D radius bends and negotiate full bore branches.
- All multi bolt pig body assemblies are welded to code standard BS EN ISO 15614-1:2004+A1:2008.
- NDT testing (MPI) of the welds can be performed if requested.
- All pipeline mediums can be accommodated
- For Sour Service (H₂S) IK-UK offers polyurethane coating of all carbon steel components
- Can be fitted with Online Electronics tracking equipment



IK-Norway
post@ik-worldwide.com
T: +47 51 44 32 00

Online Electronics
sales@online-electronics.com
T: + 44 (0) 1224 714714

IK-UK
sales@ik-worldwide.com
T: + 44 (0) 1325 307508