


5V-CRIMP

Condensed
Technical
Reference

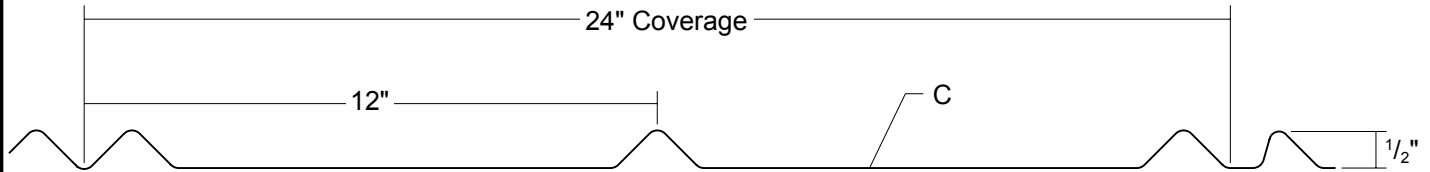

ARCHITECTURAL
RESIDENTIAL
PANEL

EXPOSED
FASTENED


24"
COVERAGE

MINIMUM
SLOPE
3:12

SOLID WOOD
SUBSTRATE

PANEL OVERVIEW

- ▶ Finishes: MS Colorfast45[®] and Acrylic-Coated Galvalume[®]
- ▶ Corrosion Protection: AZ55 per ASTM A 792 for unpainted Galvalume[®]
AZ50 per ASTM A 792 for painted Galvalume[®]
G90 per ASTM A 653 for Galvanized
- ▶ Gauges: 26 ga standard; 24 ga optional
- ▶ 24" panel coverage, 1/2" rib height
- ▶ Panel Length: Minimum: 5'; Maximum: 45' recommended
- ▶ Residential, 'V' rib roof system
- ▶ Minimum roof slope: 3:12
- ▶ Applies over plywood with minimum 30# felt underlayment

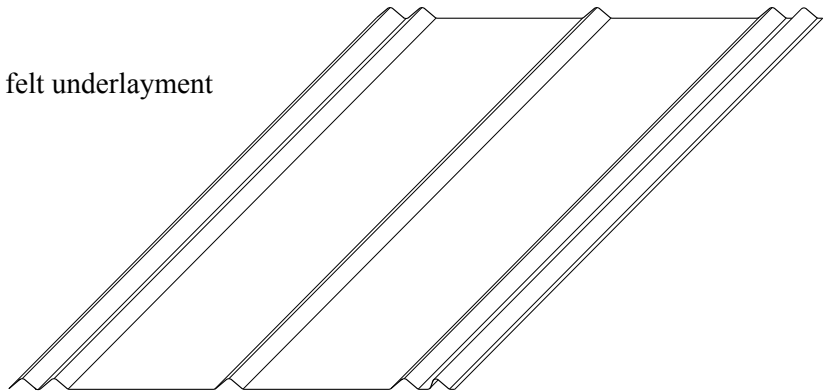


TESTING AND APPROVALS

- ▶ UL 2218 Impact Resistance - Class 4
- ▶ UL 790 Fire Resistance Rating - Class A, per building code
- ▶ UL 263 Fire Resistance Rating - per assembly
- ▶ UL 580 Uplift Resistance - Class 90 Constructions: #579 and #453
- ▶ Texas Windstorm - Evaluation RC-160
- ▶ 2017 FBC Approvals - FL14645.2, FL14645.3 and FL14645.4
- ▶ Miami-Dade County, Florida NOA 13-0627.02 expires 6/29/2018

ms metal sales[™]
manufacturing corporation


5V-CRIMP

FASTENING PATTERN

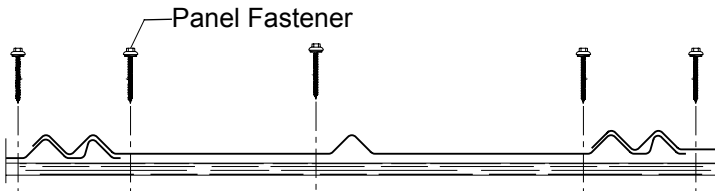


ALTERNATE FASTENING PATTERN

Field of Panel

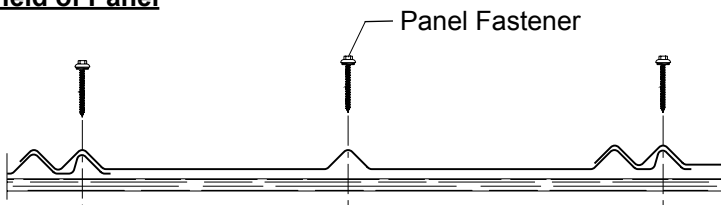

Ends of Panel

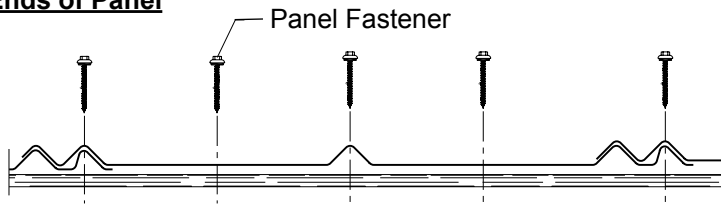

FASTENER INFORMATION

Overdriven fasteners will cause panel distortions.

Fasteners should extend 1/2" or more past the inside face of the support material.

Thick panels (ex. 18 ga) or supports (ex. 1/2" steel) may require predrilling of holes for screws.

Panel Fastener:

Attaching to Wood:

#10-14 Wood Screw

#10-14 XL Wood Screw

Trim Fastener:

1/4"-14 x 7/8" Stitch Screw

1/4"-14 x 7/8" XL Stitch Screw

SECTION PROPERTIES

ALLOWABLE UNIFORM LOADS, psf For various fastener spacings

| Ga | Width in | Yield ksi | Weight psf | Top In Compression | | Bottom In Compression | | Outward Load | | | | | |
|----|-------------|--------------|---------------|--|--|--|--|--------------|-----|------|----|------|----|
| | | | | I _{xx} in ⁴ /ft | S _{xx} in ³ /ft | I _{xx} in ⁴ /ft | S _{xx} in ³ /ft | 0.5' | 1' | 1.5' | 2' | 2.5' | 3' |
| | | | | | | | | | | | | | |
| 26 | 24 | 50 | 0.78 | 0.0025 | 0.0070 | 0.0015 | 0.0055 | 197 | 100 | 71 | 62 | 50 | 42 |
| 24 | 24 | 50 | 1.02 | 0.0030 | 0.0089 | 0.0020 | 0.0073 | 197 | 100 | 71 | 62 | 50 | 42 |

- Theoretical section properties have been calculated per AISI 2016 'North American Specification for the Design of Cold-Formed Steel Structural Members'. I_{xx} and S_{xx} are effective section properties for deflection and bending.
- Allowable load is calculated in accordance with AISI 2016 specifications considering bending, shear, combined bending and shear and deflection. Allowable load considers the 3 or more equal spans condition. Allowable load does not address web crippling, fasteners, support material or load testing. Panel weight is not considered.
- Deflection consideration is limited by a maximum deflection ratio of L/180 of span.
- Allowable loads do not include a 1/3 stress increase for wind.