
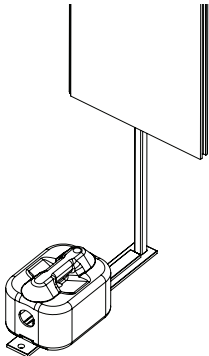

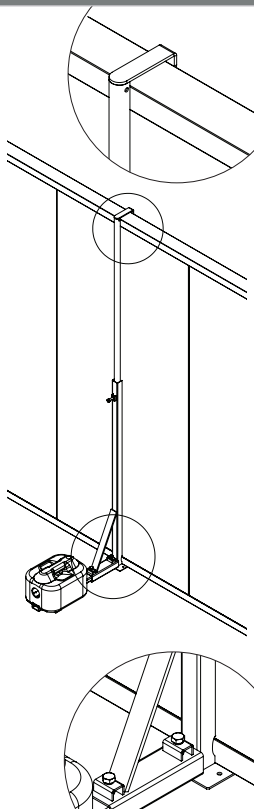
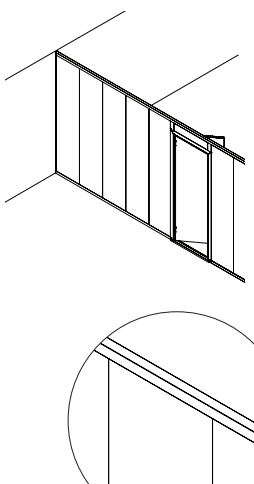


## SUPPORT OPTIONS

The Hoardfast Standard PVC system has a range of supports depending on your project requirement; from free-standing up to 3m with multiple stability options to a floor-to-ceiling fix up to 5m.

| SUPPORT TYPE                    | SUPPORT SPECIFICATION   | USED WITH: PANEL | USED WITH: PANEL HEIGHT |
|---------------------------------|---|------------------|-------------------------|
| Equal (free-standing)           |  <ul style="list-style-type: none"> <li>• Self supporting up to 2.7m high</li> <li>• Support inserts into hollow flute of the panel</li> <li>• Support protrudes each side of panel by 210mm*</li> </ul>  | Standard PVC     | 1.12m / 2.25m / 2.7m    |
|                                 |   |                  |                         |
| Offset Weighted (free-standing) |  <ul style="list-style-type: none"> <li>• For additional stability up to 2.7m high</li> <li>• Allows up to 3 x 16kg weights to be installed per support</li> <li>• Support inserts into hollow flute of the panel</li> <li>• Weights are secured with a bolt, washer and wingnut</li> <li>• Support protrudes one side of panel by 600mm (construction side)*</li> </ul> | Standard PVC     | 1.12m / 2.25m / 2.7m    |
|                                 |   |                  |                         |
| Bolt Down (free-standing)       |  <ul style="list-style-type: none"> <li>• For a more stable and permanent solution up to 2.7m high</li> <li>• Can be secured to the floor</li> <li>• The support inserts into the hollow flute of the panel</li> </ul>   | Standard PVC     | 1.12m / 2.25m / 2.7m    |
|                                 |   |                  |                         |

\*based on use with 35mm thick panel

| TYPE                         | SPECIFICATION   | PANEL        | PANEL HEIGHT                           |
|------------------------------|---|--------------|--|
| Universal<br>(free-standing) |  <ul style="list-style-type: none"> <li>• For maximum stability</li> <li>• Free-standing up to 3m high</li> <li>• Standard: allows up to 3 x 16kg weights per support (Protrudes 645mm construction side)</li> <li>• Long: will accommodate up to 6 x 16kg weights per support (Protrudes 900mm construction side)</li> <li>• System secured at base using a hooked in u-channel and at the top using a hooked over pole</li> </ul> | Standard PVC | 2.25m / 2.7m / 3m                      |
|                              |   | Soundscreen  | 2.25m / 2.7m / 3.1m                    |
|                              |   | Firescreen   | 2.25m / 2.7m / 3.1m                    |
|                              |   | Flamescreen  | 2.25m / 2.7m                           |
| Floor-to-ceiling             |  <ul style="list-style-type: none"> <li>• Floor-to-ceiling fixed solution up to 5m high</li> <li>• Installed using supplied u-channels</li> </ul>  | Budget PVC   | 2.7m / 3.5m / 4.8m                     |
|                              |   | Standard PVC | 2.25m / 2.7m / 3m / 4m / 5m            |
|                              |   | Soundscreen  | 2.25m / 2.7m / 3.1m                    |
|                              |   | Firescreen   | 2.25m / 2.7m / 3.1m / 3.5m / 4m / 4.5m |
|                              |   | Flamescreen  | 2.25m / 2.7m / 3.5m                    |

This fact sheet is for illustrative purposes only and based on the latest information at the time of print. Installation methods may vary depending on specific project requirements. Westgate reserve the right to make changes at any time without notice.