

High Friction / Differential Pig

www.ik-uk.com



Designed to be used as a temporary isolation, IK-UK's range of High Friction Pigs offers a simple and proven solution when under taking pipeline repairs.




The range is starts at 4" through to 20"

With pressure rating up to 10 bar differential pressure

The standard design is supplied with ten polyurethane high interference sealing discs.

Prior to supply factory testing provides the client with a pigging pressure to locate the pig, a hydrostatic test to prove the pig can hold the required differential pressure and finally a 'flipping' pressure which is required to return / send back the pig to the launcher.

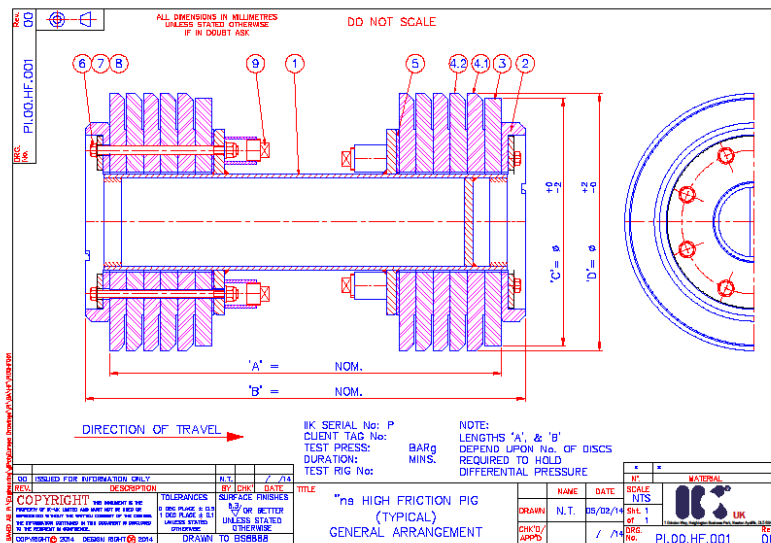

The pig is usually located by the attachment of a wire rope, alternatively by the installation of a tracker.

As standard all IK-UK's scrapers are designed to pass minimum 3D radius bends and negotiate full bore branches.

All multi bolt scraper body assemblies are welded to code standard BS EN ISO 15614-1:2004+A1:2008. and all welds subject to NDT (MPI) testing there after.

NEW - For Sour Service (H2S) IK-UK offers polyurethane coating of all carbon steel components



IK-Norway post@ik-worldwide.com T: +47 51 44 32 00	Online Electronics sales@online-electronics.com T: + 44 (0) 1224 714714	IK-UK sales@ik-worldwide.com T: + 44 (0) 1325 307508	IK-Saudi contact-ik-saudi@ik-worldwide.com T: +966 13 802 6480
---	--	---	---



IK-Norway
post@ik-worldwide.com
T: +47 51 44 32 00

Online Electronics
sales@online-electronics.com
T: + 44 (0) 1224 714714

IK-UK
sales@ik-worldwide.com
T: + 44 (0) 1325 307508

IK-Saudi
contact-ik-saudi@ik-worldwide.com
T: +966 13 802 6480