

Service Lift



- **Up to 15 metres Travel**
- **Self Supporting Structure**
- **No Pit Required**
- **Built to suit your requirements**
- **Variable Car Sizes**
- **Ex Stock**
- **No separate machine room required**
- **Fast Delivery**

Niche..... Our passion and purpose is the supply of specialist lifts that enable wheelchair users and the less able gain access to upper floors and up stairways, plus service, trolley and goods lifts for transporting goods in the range 5kgs to 2000kgs

We supply, install and service Niche products that meet your specific needs.




NICHE LIFTS—Focus and expertise working uniquely for YOU on Niche Products.

Service Lift

Model Type	Service lift, with entrances at serving height.
Rated Load	Up to 100 kg
Rated Speed	0.3 m/s
Drive Type	Traction, machine above
Number of Stops	Up to 6 stops
Power Supply	415v, 3 phase, 50hz, 4-wire. Single phase also available on request.
Travel	Up to 15 metres
Pit	Not required
Controls	Call and send buttons at each landing. Lift in use, car position indicator and door open buzzer at each landing.
Configuration	Single entry, through car or adjacent available
Door Type	Vertical bi-parting on landings. Galvanised or stainless steel finish available with or without fire certification.
Shaft Enclosure	Standard freestanding galvanised structure clad by others. Note structure requires horizontal ties to the building fabric.
Car	Galvanised or stainless steel car with manual door operation. Safety gear can be provided if required.
Special Items	Light & socket in the machine room, lift arrival buzzer, lift out of use indicator and machine room access door.
Options	Single phase (230volt) unit Stainless steel finishes Fire rated entrances Shaft enclosure cladding Heated shelf Variable car sizes
Compliance	EN81.3 EC Machinery Directive 2006/42/EC
Documentation	Owners guide issued on completion.



Model Type	Load	Car Width	Car Depth	Car Height	Shaft Width	Shaft Depth	Headroom	NOTE
50.45/0	50 kg	600	600	800	920	780	2790	1. Headroom based on a serving level (SL) of 800. 2. Variable dimension cars available please call for information. 3. Shaft depth dimensions suitable for through car arrangement. 4. Rated Speed 0.45 m/s. 5. These models are available ex stock up to a maximum travel of 7.3 metres with 3 openings. 6. Bi Parting car doors reduces the car internal depth by 30mm per door and the clear opening height by 65mm. 7. A car roller shutter reduces the car internal depth by 35mm per shutter, reduces the clear opening width by 40mm and height by 65mm.
5 50.45/5	50 kg	460	570	800	750	750	2600	
100.45/0	100 kg	800	800	800	1120	980	2790	
5 100.45/5	100 kg	710	820	800	1000	1000	2600	
100.45/1	100 kg	1000	1000	1200	1320	1180	3390	
50.45/7	50 kg	600	600	800	920	840	2790	

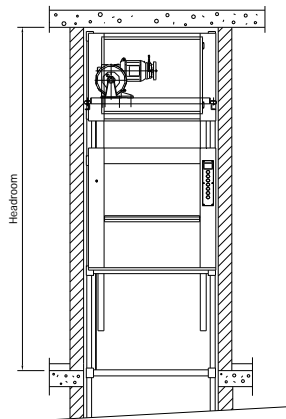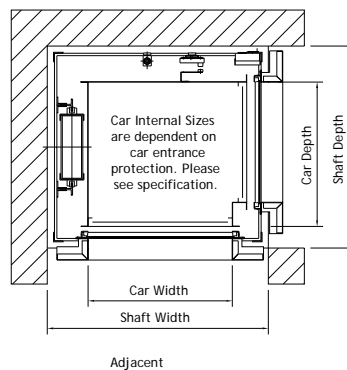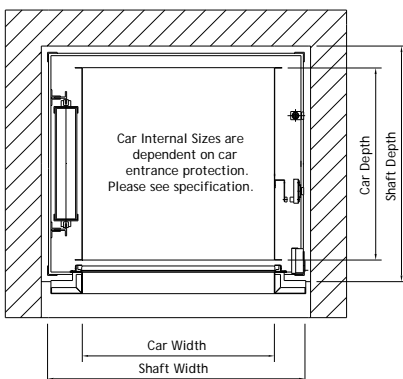

NicheTM
Lifts

Niche Lifts Ltd
Office 15-16
12 Farwig Lane
Bromley, Kent
BR1 3RB

Tel 020 8295 2852
Fax 020 8466 1695

www.nichelifts.com



Configure your lift on-line at www.nichelifts.com

The information contained in this brochure was correct at the time of printing, due to continued development of our products we reserve the right to change the specification without prior notice