

### DEREVE SERIES DF65HP

SAFETY RELIEF VALVE SIDE OUTLET DISCHARGE COMPLETE WITH SEALED COVER



#### Features


- High performance
- Soft valve washer for 'bubble tight' seal
- Side outlet discharge
- Valve washers to suit air & inert gases
- Brass construction with stainless steel springs

**Pressure range 27.6 barg to 56.8 barg**

Size: 1/2" BSP taper inlet x 3/4" BSP outlet

**Valves can be supplied de-greased for oxygen service & lead wire sealed.**

Dimensions  
in mms

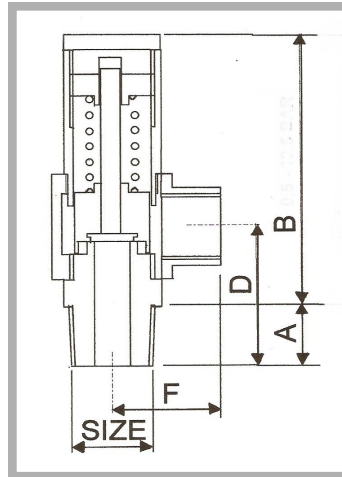

Valve size	1/2" X 3/4" (DN15 x DN20)
A	18
B	120
D	48.5
F	36.0

#### Specification

The series DF65 is a High Lift Safety Relief Valve with side outlet discharge suitable for air and inert gas applications.

The flow is de-rated and measured in accordance with BS6759 Part 2: 1984

The valve re-seats by minus 10% of set pressure.

**Maximum Set Pressure: 56.8 bar**

**Maximum Temperature: 180°C**

**ALL SAFETY VALVES ARE PED APPROVED AND MARKED CE 0353**

**CAPACITIES - AIR @ 15°C in Std. Litres/sec @ 10% overpressure**

CAPACITIES - AIR @ 15°C in Std. Litres/sec @ 10% overpressure					
Size	BarG	35.3	43.0	50.7	56.8
1/2" x 3/4"	L/sec	303	367	431	482

**BE™ Bonut Engineering Ltd**  
T/A **DEREVE™ Valves**

Unit 12, Latham Close, Bredbury Industrial Park  
Stockport, Cheshire, SK6 2SD, United Kingdom  
Tel: +44 (0) 161 430 4000 Fax: +44 (0) 161 494 1461  
email: sales@bonut.co.uk website: www.bonut.co.uk