

TW462

Features

Our most versatile DN117/4.6 Twin-Wall™ System features a 2.5mm wear resistant pipe liner and 1.5mm steel shell, with the ends having a chrome carbide liner to protect the pipe against excessive wear.

Specifications

Heat Treatment

Induction Hardened

System

DN117/4.6

Wall Thickness

2.5mm + 1.5mm

Hardness

Up to 68HRc

Working Pressure

85 bar (1250 psi)

Pipe Weight

8.04 lbs/ft (12 kg/m)

FWC Weight

24.9 lbs/ft (37 kg/m)


Complete System

- Twin-Wall™ Deck Pipe
- CCI-Lined Elbows
- CCI-Lined Backend Kit
- CCI-Lined Deck Pipe
- CCI-Lined Reducers

Twin-Wall™ Boom Tube (2.5mm + 1.5mm) with 148mm chrome carbide insert (CCI) weld ends

Length (in)	Length (mm)	Approx. Shipping Weight (lbs / Kg)	Extended End Part Number	Standard End Part Number
39.37	1000	38 / 17	B46TW3937M	B46TWUL3937M
78.75	2000	64 / 29	B46TW7875M	B46TWUL7875M
118.12	3000	91 / 41	B46TWB812M	B46TWULB812M
157.50	4000	117 / 53	B46TW750M	B46TWULF750M
Make up length (consult factory)			B46TW__M	B46TWUL__M

Other lengths are available upon request. Consult Factory

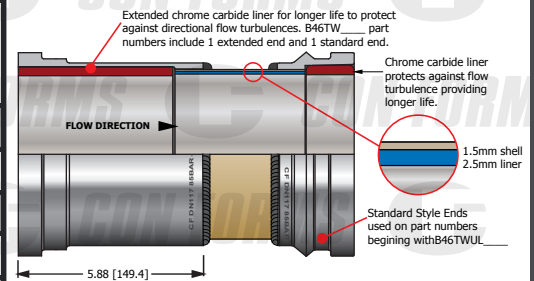

800-223-3676



CONFORMS.COM

