

## Chassis Monitor



### 10.4"

#### Specifications


**RoHS**  
COMPLIANT  
2002/95/EC

Model Name	R10L100-CHT2
Viewable Size Image	10.4"
Active Display Area(mm)	210.4(H) x 157.8(V)
Pixel Pitch(mm)	0.0685 (H) x 0.2055 (V)
Number of Pixels	1024x768
Contrast Ratio	1200:1 (typ.)
Display Color	16.2M (8bits/color)
Brightness(cd/m <sup>2</sup> )	350 (typ.)
Viewing Angle(CR>=10)	-88~88 (H); -88~88 (V)
Synchronization Range	
Horizontal/Vertical	31.5~46.9KHz / 60~75Hz
Recommended Resolution	1024x768@60Hz, 75Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	15 W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	No
Optional Touch Screen	Resistive, SAW, IR

Remarks: R10L100 = VGA input only

R10L110 = VGA + Video input

#### Mechanical Drawing

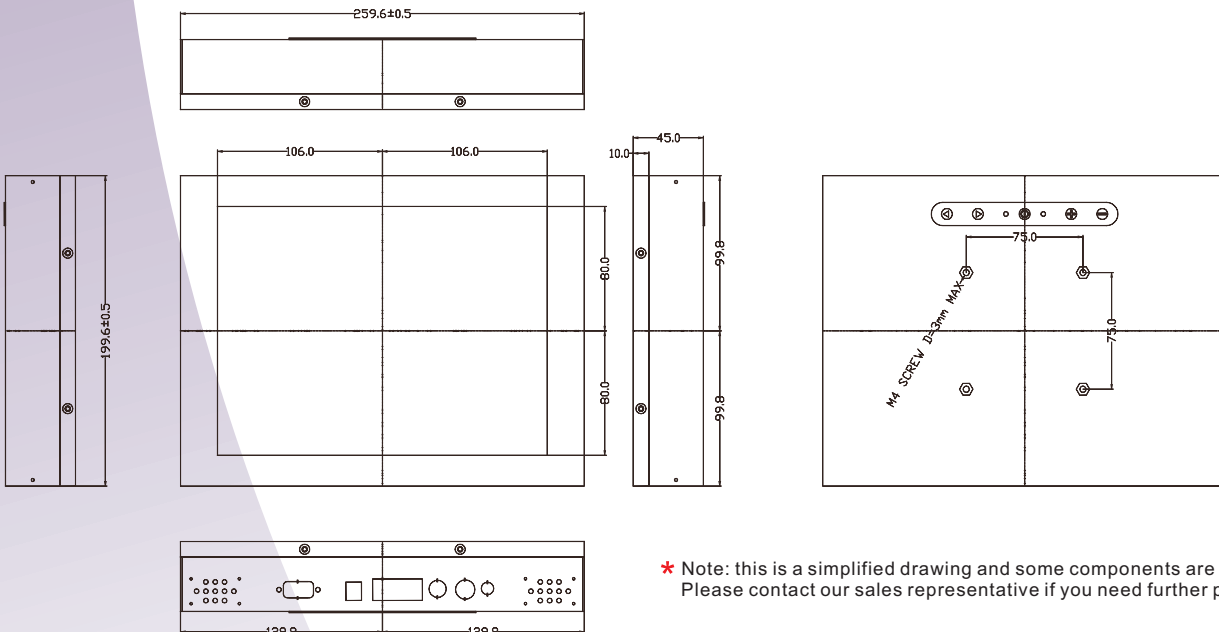

UNIT:mm

\* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Rev.	Reasons	Revised Date
1.3	Pic change	Jun-04-13