



# HGS (INDIA) LIMITED

HGS 3 Core Leader Cable (conventional) Unfilled / filled




158, Sector-4, IMT Manesar, Gurgaon-122050 Haryana INDIA  
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845  
Email: [sales@hgsindia.com](mailto:sales@hgsindia.com)



# HGS (INDIA) LIMITED

## SCHEMATIC

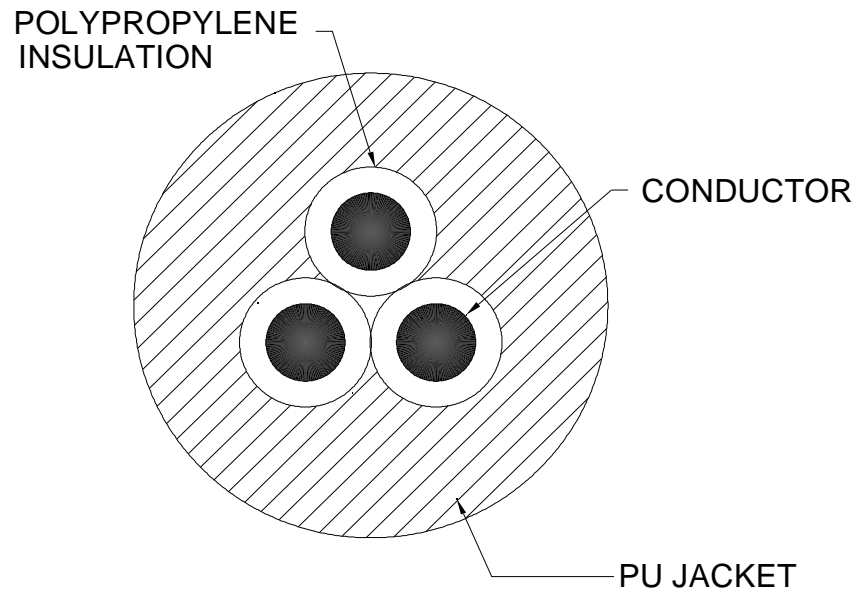

GEOPHONE LEADER CABLE (3 CORE)

HGS 3 Core Leader Cable (conventional) Unfilled / filled



# HGS (INDIA) LIMITED

## SPECIFICATIONS

### HGS 3 Core Leader Cable (conventional) Unfilled / filled

- 70 lbs tinned copper weld conductor which prevents corrosion & aids solderability.
- Polypropylene conductor Insulation with good dielectric properties and high melt temperature.
- PU extruded directly over insulated core.
- Standard available sizes are 4.57, 5.33, 6.35 mm. Other sizes available as per customer configuration.
- Break Strength more than 80 kgf.
- Cable weight is 27 kg, 33 kg & 44 kg per km for 4.57 mm, 5.33 mm & 6.35 mm cable respectively.
- Water block, which seals minor cuts, filled leader cable for marsh harnesses also available.
- Operating Temperature Range: -20°C to +70°C