



buffer store

Innovation at its best

From 20 litres to 3000 litres capacity, the Advance Appliances range of Buffer Tanks is the culmination of years of supply to the trade.

All buffers can be used safely in sealed systems and have appropriate tappings configurations for a wide range of applications.

- All standard size cylinders are stainless steel
- 20 litre & 100 litre are mild steel compact units for versatile positioning
- Create a store of energy for space heating
- Fully insulated
- Sealed system or open vented
- Commercial sizes available
- 25 year guarantee on stainless steel buffers



Neat and insulated, Advance buffers are fitted with an immersion heater and temperature sensing point.

A vent and drain is incorporated in all tanks.



Stainless steel buffers carry a 25 year guarantee and mild steel buffers are guaranteed for 2 years.

Specials with coils to utilise solar thermal gain are available made to order.



Mild Steel 20 & 100 Litre Buffers



20 Litre Buffer

Wall hung mild steel with 28mm compression ends. Prevents shorting in heat pump systems. Suitable for sealed systems.

The 100 Litre Buffer

The 100 litre buffer shows innovation at its best. As a rectangular tank it is space efficient, only 420 mm high, and is constructed from mild steel.

It is strong enough to support up to a 300 litre heat pump cylinder offering a tidy footprint for installations without the floor space for two tanks, and can be used in sealed systems.



The modern solution

The cylinder type buffers – from 20 to 3000 litres, are made in the UK from Duplex stainless steel and are finished in a smart case. All buffers have four tappings for flexible configuration – to prevent shorting, adding volume or simply as an accumulator. Careful matching will enhance heat pump/low energy appliances by accumulating energy for use at peak demand.


Although buffers are mainly used in heat pump systems they can be used with wood burners and bio mass as accumulators, maximising gain from these fuel technologies.

Stainless steel buffers carry a 25 year guarantee and mild steel buffers are guaranteed for 2 years. Advance has worked with market leaders to ensure that the design and tappings configuration are compatible with most needs. Specials with coils to utilise solar thermal gain are available made to order.

General Specifications

	Material	Duplex Stainless Steel except * mild steel
Max operating pressure & temperature	3 Bar/95°C	
Insulation cylinders	Polyurethane foam injection	
Insulation 100 litre tank	Rigid polyurethane	
Thermostat probe pocket	Fitted to cylinder, 1/2" boss on 100 litre tank	

How Does it Work?

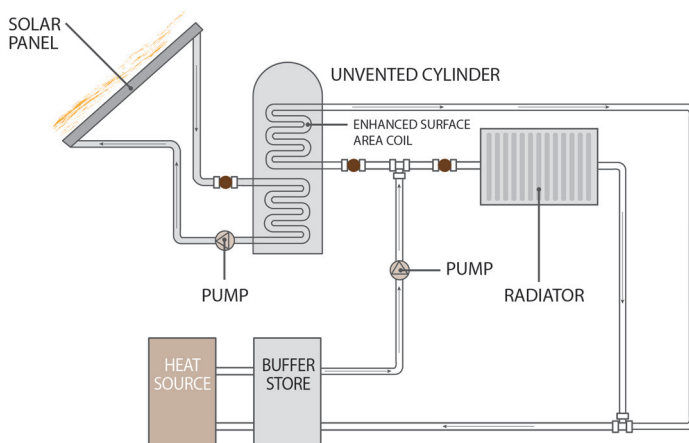

This schematic is for visual purpose only. Installations will vary in accordance with heat pump manufacturers guidelines.

Technical Specifications

Code	Volume (Ltr)	Size (mm)	Heat Loss (Watts/Class)	Immersion Heaters	Tappings
BFS 20 *	20	270 Dia x 520	41 / C	N/A	2 x 28mm comp
BFS 80	80	577 Dia x 645	31 / A	1 x 3kW	4 x 28mm male
BFS 100 *	100	420H x 560W x 600D	69 / C	1 x 3kW	4 x 28mm male
BFS 150	150	577 Dia x 1086	44 / B	1 x 3kW	4 x 28mm male
BFS 215	215	577 Dia x 1485	58 / B	1 x 3kW	4 x 2" BSP female
BFS 255	255	577 Dia x 1753	63 / B	1 x 3kW	4 x 2" BSP female
BFS 305	305	577 Dia x 2030	69 / B	1 x 3kW	4 x 2" BSP female
BFS 500	500	750 Dia x 2004	99 / C	1 x 3kW	4 x 2" BSP female
BFS 1000	1000	990 Dia x 1800	N/A	1 x 3kW	4 x 2" BSP female

* Mild Steel

Advance Appliances

Unit 4 • Coppice Side Ind Est. • Brownhills • Walsall • West Midlands • WS8 7EX
T: 01543377723 • F: 01543 360620 • E: sales@advanceappliances.co.uk