

# Printec 865


## Key Performance

- Very good half tone reproduction and overall printing quality
- Proper shock mark absorption
- Excellent paper smash resistance
- Reliable commercial sheetfed performer

## MAIN APPLICATION

Sheetfed, Packaging

**Printec 865 is available in 1.96 mm thickness, 3 ply**

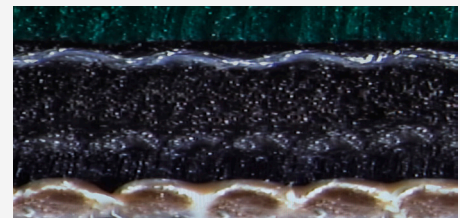

Printec 865

## ✓ The product at a glance

<b>INK COMPATIBILITY</b>	Conventional
<b>PRINTING SURFACE COLOUR</b>	Dark Green
<b>THICKNESS (mm)</b>	1.96
<b>AVERAGE LOAD VALUE N/cm<sup>2</sup> @ 0,20 mm Indentation</b>	250
<b>SURFACE ROUGHNESS (Ra micron)</b>	1,2
<b>WATER &amp; SOLVENT PROTECTION</b>	No

**FOR ANY FURTHER DETAILS AND FOR A QUOTATION  
PLEASE REFER TO YOUR SALES MANAGER  
OR EMAIL US AT: [printingsm@trelleborg.com](mailto:printingsm@trelleborg.com)**