

Pictures



Version	Item No.	Size	LED Quantity ( Piece )	Input Voltage	Power	CCT	Lumens	Power Factor	Beam Angle
Standard	CL-2G-15W	356*129.5mm	72	AC 85-265V	10W	2800~6500k	1000lm±10%	>0.9	180°
	CL-2G-15W	356*129.5mm	72	AC 85-265V	15W	2800~6500k	1500lm±10%	>0.9	180°
	CL-2G-18W	356*129.5mm	96	AC 85-265V	18W	2800~6500k	1800lm±10%	>0.9	180°
	CL-2G-24W	356*129.5mm	144	AC 85-265V	24W	2800~6500k	2400lm±10%	>0.9	180°
dimmable (Non-flickering)	CL-2G-15W	356*129.5mm	72	AC 85-265V	10W	2800~6500k	1000lm±10%	>0.9	180°
	CL-2G-15W	356*129.5mm	72	AC 85-265V	15W	2800~6500k	1500lm±10%	>0.9	180°
	CL-2G-18W	356*129.5mm	96	AC 85-265V	18W	2800~6500k	1800lm±10%	>0.9	180°
	CL-2G-24W	356*129.5mm	144	AC 85-265V	24W	2800~6500k	2400lm±10%	>0.9	180°
Microwave Sensor	CL-2G-15W	356*129.5mm	72	AC 85-265V	15W	2800~6500k	1500lm±10%	>0.9	180°
	CL-2G-18W	356*129.5mm	96	AC 85-265V	18W	2800~6500k	1800lm±10%	>0.9	180°
	CL-2G-24W	356*129.5mm	144	AC 85-265V	24W	2800~6500k	2400lm±10%	>0.9	180°
Emergency	CL-2G-15W	356*129.5mm	72	AC 85-265V	15W	2800~6500k	1500lm±10%	>0.9	180°
	CL-2G-18W	356*129.5mm	96	AC 85-265V	18W	2800~6500k	1800lm±10%	>0.9	180°
	CL-2G-24W	356*129.5mm	144	AC 85-265V	24W	2800~6500k	2400lm±10%	>0.9	180°
Emergency +dimmable + sensor	CL-2G-15W	356*129.5mm	72	AC 85-265V	15W	2800~6500k	1500lm±10%	>0.9	180°
	CL-2G-18W	356*129.5mm	96	AC 85-265V	18W	2800~6500k	1800lm±10%	>0.9	180°
	CL-2G-24W	356*129.5mm	144	AC 85-265V	24W	2800~6500k	2400lm±10%	>0.9	180°


Packing Information	Item	Single Box Packing			Carton Packing		
		QTY/Box	Box Size	GW	QTY/Carton	Carton zise	GW
	CL-2G-24W	1 piece	400*400*140mm	1.3KG	5 pieces	415*720*420mm	8.5kg

### Six solutions for option

1. Standard
2. Dimming (0-10V)
3. Emergency
4. Sensor
5. Emergency+Sensor
6. Emergency+Dimming



### Dimension

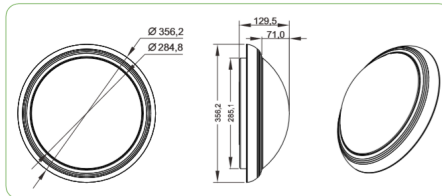


### Application



Hotel, Display, Shopping Mall, Club, Gym, Underground Parking, Corridor, Exhibition, Family illumination and other indoor lighting

### Layers

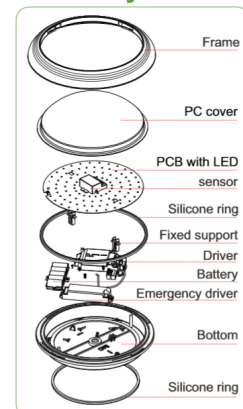

High transparent PC cover, IP54 protection level, low light decay, high lighting efficiency, safty isolated driver with CB/GS/SAA etc. certificates, over 50000 hours long life.