




MCR223-UDD-865

Key Features:

- Stainless Steel Interior & Exterior
- Designed To Operate In 43°C Ambient
- Convenient 150mm Wide Service Void
- GN 2/3 Shelving System
- Anti-Drip Worktop
- Built-In Air Duct For Even Temperature Distribution
- R404A Solenoid & Expansion Valves Fitted
- Zero ODP Injected Polyurethane Insulation - 60mm
- 2 / +10°C Refrigerator Temperature Range
- Electronic Controller With Easy Read LCD Screen
- Electric Defrost
- Door / Drawer Locks Fitted As Standard
- Rifle Bore Coated Evaporators
- Integrated Flush Door Handle
- Gastronorm Shelving System - Anti Tilt Slides
- Hi / Lo Audio Visual Temperature Alarms
- Self Closing Doors
- Adjustable Legs
- Drain Is Required For Condensate Water

Precision's durable all stainless steel slimline GN2/3 remote counters have been designed to provide commercial caterers with reliable, energy and cost efficient refrigerated storage solutions. At just 520mm deep, these refrigerated counters provides a practical and flexible solution when space it at a premium.


Models using remote refrigeration systems reduce heat and noise in the kitchen and save space. A floor drain is required for the counter's condensate water, or we can supply an electric vaporiser tray if required.

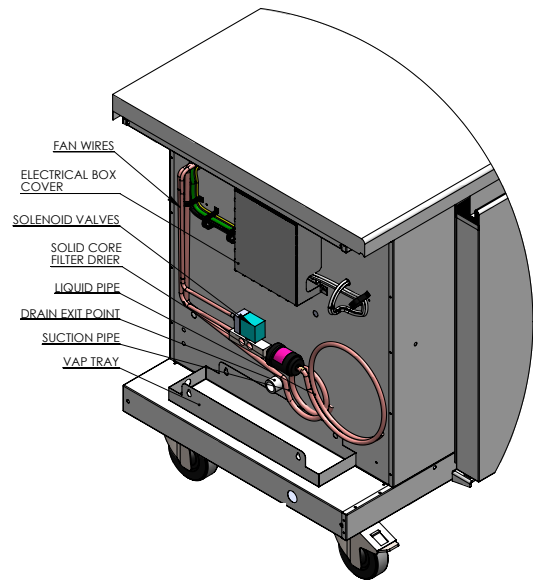

Service Void Connection Points

Options:

- Bank of 2 Drawers - H - (200/200mm Depth)
- Bank of 3 Drawers - T - (100/130/130mm Depth)
- Self Contained Units - (See Separate Spec Sheet)
- Raised Pan Grid - PG / Countertop Pan Wells
- Biscuit Worktop - Lowers Height By 20mm
- Low Profile Castors - Lowers Height By 17mm
- Levelling Feet (Plinth) - Lowers Height By 106mm
- ST/ST Back / Splashback
- Right Hand Condensing Unit / Services
- Extra Shelves / Slides
- Electric Condensate Vaporiser Tray

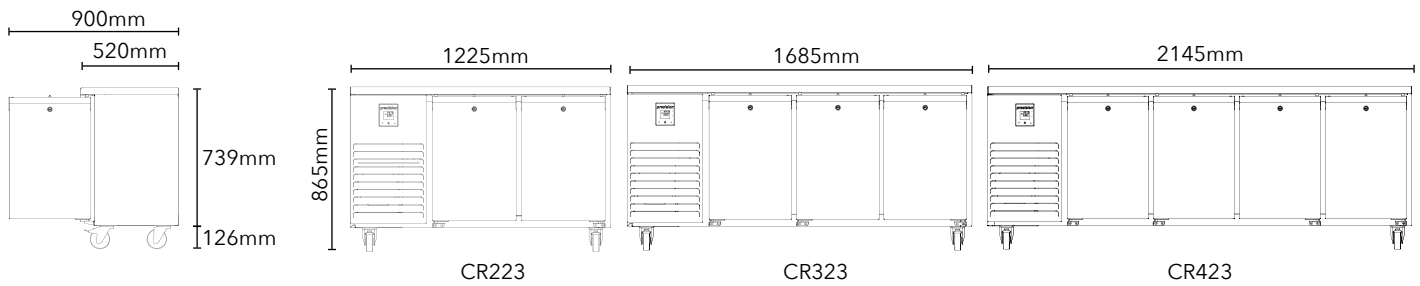

Model	MCR223	LCR223	MCR323	LCR323	MCR423
Type	Refrigerator	Freezer	Refrigerator	Freezer	Refrigerator
Material	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext
Shelf Size	GN2/3	GN2/3	GN2/3	GN2/3	GN2/3
Number of Shelves	4	4	6	6	8
Max Number of Shelves (100mm Spacing)	10	10	15	15	20
Temperature Range	-2 / +10°C	-18 / -22°C	-2 / +10°C	-18 / -22°C	-2 / +10°C
Exterior WxDxH (mm)	1225x520x865	1225x520x865	1685x520x865	1685x520x865	2145x520x865
Net Usable Volume (litres)	120	120	180	180	241
Weight (KG)	90	90	105	105	125
Refrigerant / GWP	R404A/3922	R404A/3922	R404A/3922	R404A/3922	R404A/3922
Refrigeration Watts (+45°C Condensing)	412	472	412	472	412
Evaporating Temp	-10°C	-30°C	-10°C	-30°C	-10°C
Heat Rejection Watts	N/A	N/A	N/A	N/A	N/A
Noise Output (dBa)	N/A	N/A	N/A	N/A	N/A
Power	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1
Running Amps	1.6	1.8	1.6	1.8	1.6
Energy Consumption / 24hrs - kWh*	N/A	N/A	N/A	N/A	N/A
Energy Consumption / Year (AEC) - kWh*	N/A	N/A	N/A	N/A	N/A
Energy Efficiency Class*	N/A	N/A	N/A	N/A	N/A

*Tested to EN16825 Climate Test Class 4 - M1 Classification Test for Refrigerators / L1 Classification Test for Freezers

We are constantly innovating and improving our products. Please always check our website for the most up-to-date version of this spec sheet