



B.22
SHOTBOLT SOLENOID
LOCKING POWER OFF
WITHOUT POSITION MONITORING
IP54

BDC.22 and BAC.22

Maximum radial force: **135kg**

Stroke: **11mm**

Plunger output and input force: **500g**

Standard voltage: **24V DC - 230V AC**

Possible voltages: **12V - 200V DC & 24V - 230V AC (-10%, +5%)**

Power: **18W-100% (Permanent service)**

Return Spring: **Internal**

Protection: **IP54**

Weight: **900g**


Service operating temperature: **-5°C, +40°C**

Temperature rating: **B**

According to Standards: **NF C 79-300**

Example of use:

- Cover locking
- Door locking
- Manipulator locking
- Protector locking

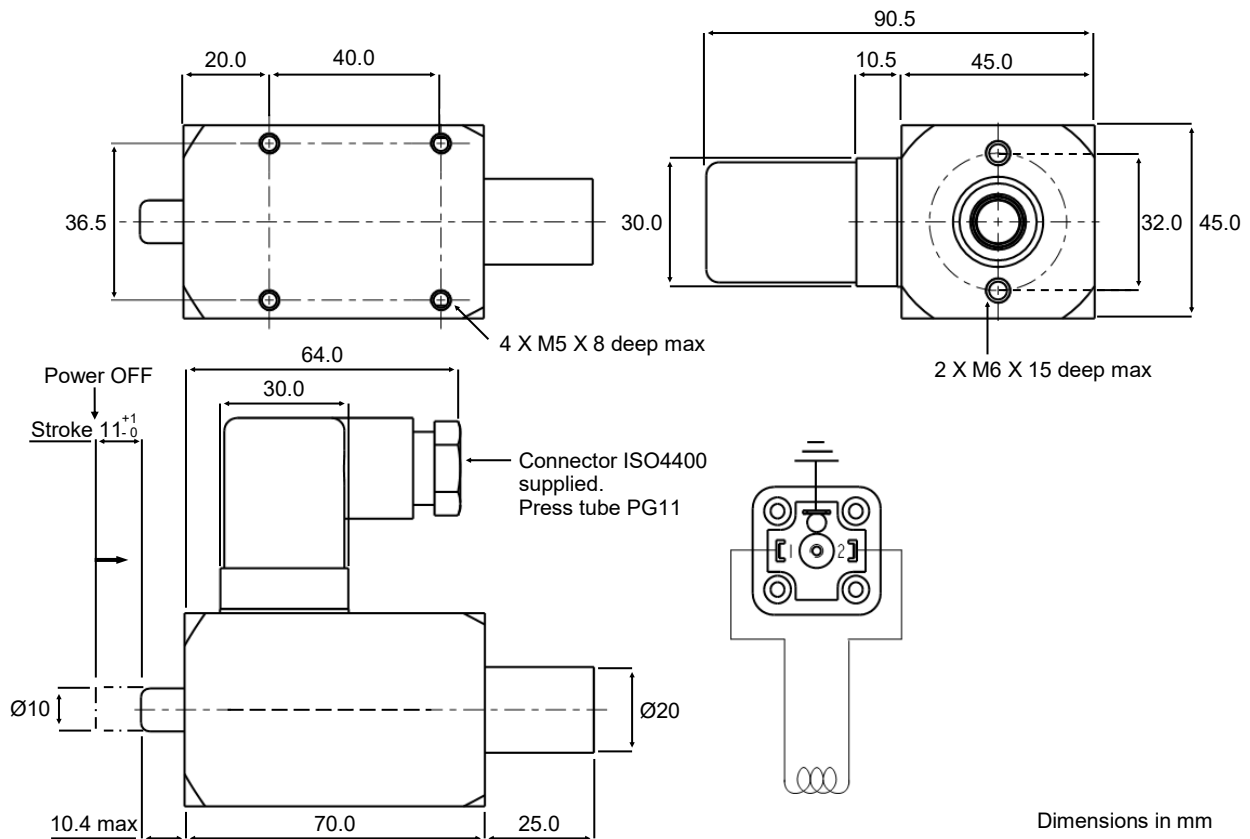

We reserve the right to alter or amend designs without prior notice.

B22 Rev 2 - 2017

HE & BS Benson Ltd

1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR

T. +44(0)1638 663535 — 663130 F. +44(0)1638 667434 E. sales@hebsenson.co.uk www.hebsenson.co.uk