

LONDANTE with Topseal

LONSEAL

Featuring one of the warmest yet boldest palettes that Lonseal has ever offered, LONDANTE is a resilient sheet vinyl that comes in seven intriguing colors and features a hypnotic cross-hatch pattern that imparts a distinctly Italian flavor to any interior space, from corporate offices to hospitality spaces to healthcare patient rooms.

Topseal is Lonseal's factory-applied urethane finish that protects the floor, reduces scuffing and simplifies routine maintenance. Topseal is applied in a 30-micron wear layer and extends the life of the flooring by protecting it from wear due to staining, soiling and scuffing.

STANDARD SIZES (nominal)


Overall thickness: 0.080" (2.0 mm)

Wear layer thickness: 0.020" (0.5 mm)

Roll size: 6' (1.8 m) wide x 60' (18.3 m)

Weight: 0.7 lbs./sq. ft., 240 lbs./roll

Colors: Seven available

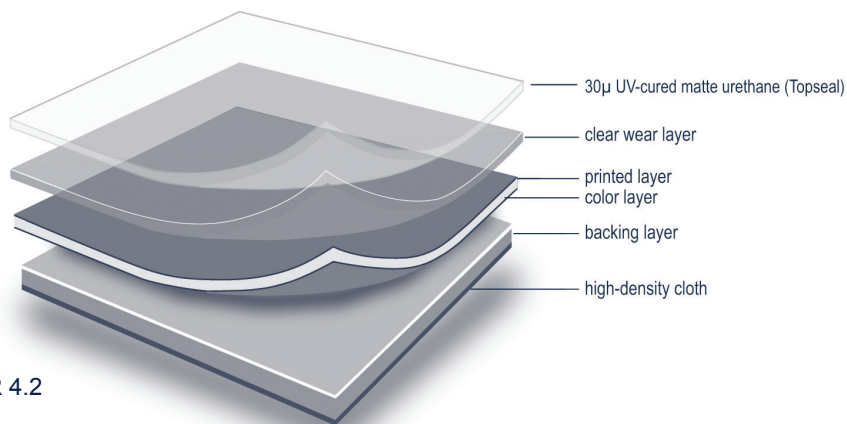

GREEN FEATURES

- GreenMedic™: Formulated for microbial resistance
- GreenAir™: Formulated for low VOCs
- 20-40% post-industrial recycled content
 - Contributes towards LEED MR 4.1 and MR 4.2
- FloorScore® Indoor Air Quality Certified
 - Conforms to CA Specification 01350
- LEED Low Emitting Materials
 - Adhesives and Sealants: LEED IEQ Credit 4.1
 - Flooring Systems: LEED IEQ Credit 4.3

10-YEAR WARRANTY

Lonseal offers a 10-year limited warranty.

| | |
|--|---------------------------------------|
| Sheet Vinyl Floor Covering with Backing, ASTM F1303..... | Type 1, Grade1, Class B |
| James Machine, SCOF, ASTM D2047..... | Neolite: 0.98 |
| Hardness, ASTM D2240..... | 97 |
| Rolling Chair Test, ASTM D6962..... | 5.0 @ 25,000 cycles |
| Critical Radiant Flux, ASTM E648..... | Class 1 ≥0.45 watts/cm ² |
| Flexibility, ASTM F137..... | Pass |
| Abrasion Resistance, ASTM D4060..... | 0.45%, 1,000 cycles |
| Puncture Resistance, ASTM F924..... | 40.5 lbs. |
| Chemical Resistance, ASTM F925..... | No Change |
| Static Load, ASTM F970..... | 0.002" @ 250 lbs. |
| Static Load (max 0.005"), ASTM F970*..... | 550 psi |
| In-Service Exposure, ASTM F1037..... | Excellent |
| Resistance to Impact, ASTM F1265..... | Pass |
| Heat Stability, ASTM F1514..... | Pass |
| Light Stability, ASTM F1515..... | Pass |
| Short-term Indentation, ASTM F1914..... | 0.005" residual indentation @ 75 lbs. |
| Dimensional Stability, ASTM F2199..... | 0.13% loss |
| Rolling Load, ASTM F2753..... | Hil-Rom Wheel, 300 lbs., 500 cycles |

*When test parameters exceed the Precision and Bias of the standard, accuracy and consistency of the results will vary. This information is provided as a reference only, and may not be indicative of the materials actual performance.

For detailed technical information, please refer to www.lonseal.com.



CERTIFIED BY
SCS Global Services



LONSEAL, INC.
928 E. 238th Street, Carson, CA 90745 USA
800.832.7111 toll free | 310.830.7111 ph
www.lonseal.com



Updated: 01.13.15