



**SRIXON**<sup>®</sup>

DEDICATED TO IMPROVING YOUR GAME™

**FIELD MANUAL**

2018-2019





# FIELD MANUAL 2018-2019

IRONS	4
WOODS	14
HYBRIDS	20
GRIPS	22



Hideki Matsuyama  
PGA Tour Professional



# MIX AND MATCH YOUR DREAM SET

Z Series Irons were designed with combination sets in mind. Strategically select long and short irons that will enhance each area of your game with the performance you need most.



**DISTANCE + WORKABILITY**  
4-6 Z 585, 7-P Z 785

**DISTANCE + FORGIVENESS**  
4-6 U 85, 7-P Z 585

**WORKABILITY + FORGIVENESS**  
4-6 Z U 85, 7-P Z 785

**Z** | SERIES  
IRONS



**Z 785**  
IRONS

**Z 585**  
IRONS

**Z U85**  
UTILITY



**Z 785 | Z 585**  
COMBO SET

**Z 585 | Z U85**  
COMBO SET

**Z 785 | Z U85**  
COMBO SET

# IRONS



## IRONS - STOCK SHAFTS:

Z 585 AND Z 785 IRONS	TRADITIONAL FLEX	RAW WEIGHT	TIP OD	BUTT OD	TORQUE	TRAJECTORY	AVAILABILITY
<b>UNITS</b>	<b>-</b>	<b>G</b>	<b>IN</b>	<b>IN</b>	<b>DEG</b>	<b>-</b>	<b>-</b>
Nippon NS Pro Modus3 Tour 105	R	103	0.355	0.600	19	Mid-High	At Once
Nippon NS Pro Modus3 Tour 105	S	106.5	0.355	0.600	1.7	Mid-High	At Once
Nippon NS Pro Modus3 Tour 120	S	114	0.355	0.600	1.8	Low-Mid	At Once
Nippon NS Pro Modus3 Tour 120	X	120	0.355	0.600	1.7	Low-Mid	At Once
Miyazaki Kaula Iron 8 Graphite	R	80	0.355	0.600	3.4	High	At Once
Miyazaki Kaula Iron 8 Graphite	S	85	0.355	0.600	3.4	High	At Once
Miyazaki Kaula Iron 8 Graphite	X	85	0.355	0.600	3.4	High	At Once

Z U85 UTILITY	TRADITIONAL FLEX	RAW WEIGHT	TIP OD	BUTT OD	TORQUE	TRAJECTORY	AVAILABILITY
<b>UNITS</b>	<b>-</b>	<b>G</b>	<b>IN</b>	<b>IN</b>	<b>DEG</b>	<b>-</b>	<b>-</b>
UST Recoil 95	F3 - (R)	91	0.355	0.600	3.9	Mid	At Once
UST Recoil 95	F4 - (S)	91	0.355	0.600	3.9	Mid	At Once
UST Recoil 95	F5 - (X)	91	0.355	0.600	3.9	Mid	At Once

## IRONS - AT ONCE CUSTOM SHAFTS (ALL TAPER TIP):

AEROTECH	TRADITIONAL FLEX	RAW WEIGHT	TIP OD	BUTT OD	TORQUE	TRAJECTORY	AVAILABILITY
<b>UNITS</b>	<b>-</b>	<b>G</b>	<b>IN</b>	<b>IN</b>	<b>DEG</b>	<b>-</b>	<b>-</b>
SteelFiber i95	S	95	0.355	0.602	2.0-2.4	Low-Mid	At Once

NIPPON	TRADITIONAL FLEX	RAW WEIGHT	TIP OD	BUTT OD	TORQUE	TRAJECTORY	AVAILABILITY
<b>UNITS</b>	<b>-</b>	<b>G</b>	<b>IN</b>	<b>IN</b>	<b>DEG</b>	<b>-</b>	<b>-</b>
NS Pro Modus3 105	R	103	0.355	0.600	1.9	Mid	At Once
NS Pro Modus3 105	S	105	0.355	0.600	1.7	Mid	At Once
NS Pro Modus3 105	X	112	0.355	0.600	1.6	Mid	At Once
NS Pro Modus3 120	S	114	0.355	0.600	1.7	Mid-Low	At Once
NS Pro Modus3 120	X	120	0.355	0.600	1.6	Mid-Low	At Once

MIYAZAKI	TRADITIONAL FLEX	RAW WEIGHT	TIP OD	BUTT OD	TORQUE	TRAJECTORY	AVAILABILITY
<b>UNITS</b>	<b>-</b>	<b>G</b>	<b>IN</b>	<b>IN</b>	<b>DEG</b>	<b>-</b>	<b>-</b>
Miyazaki Kaula Iron 8 Graphite	R	80	0.355	0.600	3.4	Mid-High	At Once
Miyazaki Kaula Iron 8 Graphite	S	85	0.355	0.600	3.4	Mid-High	At Once

## IRONS - AT ONCE CUSTOM SHAFTS (ALL TAPER TIP):

KBS	TRADITIONAL FLEX	RAW WEIGHT	TIP OD	BUTT OD	TORQUE	TRAJECTORY	AVAILABILITY
<b>UNITS</b>	<b>-</b>	<b>G</b>	<b>IN</b>	<b>IN</b>	<b>DEG</b>	<b>-</b>	<b>-</b>
C-Taper	S	120	0.355	0.600	1.9	Low	At Once
C-Taper	X	130	0.355	0.600	1.8	Low	At Once
C-Taper Lite	S	110	0.355	0.600	2.1	Mid-High	At Once
C-Taper Lite	X	115	0.355	0.600	2.0	Mid-High	At Once
Tour	S	120	0.355	0.600	1.6-2.0	Mid	At Once
Tour	X	130	0.355	0.600	1.6-2.0	Mid	At Once
Tour 90	S	102	0.355	0.600	2.3	Mid-High	At Once
KBS 560 (Junior Shafts)	R	80-89	0.355	0.560	N/A	Mid-High	At Once
KBS 580 (Junior Shafts)	R	80-88	0.355	0.580	N/A	Mid-High	At Once
KBS 580 (Junior Shafts)	S	80-89	0.355	0.580	N/A	Mid-High	At Once

PROJECT X	TRADITIONAL FLEX	RAW WEIGHT	TIP OD	BUTT OD	TORQUE	TRAJECTORY	AVAILABILITY
<b>UNITS</b>	<b>-</b>	<b>G</b>	<b>IN</b>	<b>IN</b>	<b>DEG</b>	<b>-</b>	<b>-</b>
Project X	5.5	115	0.355	0.600	1.6-1.8	Low	At Once
Project X	6.0	120	0.355	0.600	1.6-1.8	Low	At Once
Project X	6.5	125	0.355	0.600	1.6-1.8	Low	At Once
Project X LZ	5.5	115	0.355	0.600	N/A	Mid	At Once
Project X LZ	6.0	120	0.355	0.600	N/A	Mid	At Once
Project X LZ	6.5	125	0.355	0.600	N/A	Mid	At Once

TRUE TEMPER	TRADITIONAL FLEX	RAW WEIGHT	TIP OD	BUTT OD	TORQUE	TRAJECTORY	AVAILABILITY
<b>UNITS</b>	<b>-</b>	<b>G</b>	<b>IN</b>	<b>IN</b>	<b>DEG</b>	<b>-</b>	<b>-</b>
Dynamic Gold	S300	130	0.355	0.600	1.5-1.9	Low	At Once
Dynamic Gold Tour Issue	S400	132	0.355	0.600	1.5-1.9	Low	At Once
Dynamic Gold Tour Issue	X100	130	0.355	0.600	1.5-1.9	Low	At Once
True Temper AMT Tour White	S300	106-130	0.355	0.600	N/A	Low	At Once
True Temper AMT Tour White	X100	106-130	0.355	0.600	N/A	Low	At Once
Dynamic Gold 105	R300	101	0.355	0.600	1.5-1.9	Low-Mid	At Once
Dynamic Gold 105	S300	103	0.355	0.600	1.5-1.9	Low-Mid	At Once
Dynamic Gold 120	S300	118	0.355	0.600	1.5-1.9	Low	At Once
Dynamic Gold 120	X100	120	0.355	0.600	1.5-1.9	Low	At Once

UST MAMIYA	TRADITIONAL FLEX	RAW WEIGHT	TIP OD	BUTT OD	TORQUE	TRAJECTORY	AVAILABILITY
<b>UNITS</b>	<b>-</b>	<b>G</b>	<b>IN</b>	<b>IN</b>	<b>DEG</b>	<b>-</b>	<b>-</b>
UST Recoil 95	F4 - (S)	91	0.355	0.600	3.9	Mid	At Once
UST Recoil 95	F5 - (X)	91	0.355	0.600	3.9	Mid	At Once
Recoil 760 ES SmacWrap	F3 - (R)	69	0.355	0.600	4.1	Mid-High	At Once
Recoil 760 ES SmacWrap	F4 - (S)	86	0.355	0.600	3.5	Mid-High	At Once



# IRONS



## IRONS - EXOTIC CUSTOM SHAFTS (ALL TAPER TIPS):

AEROTECH	TRADITIONAL FLEX	RAW WEIGHT	TIP OD	BUTT OD	TORQUE	TRAJECTORY	AVAILABILITY
<b>UNITS</b>	<b>-</b>	<b>G</b>	<b>IN</b>	<b>IN</b>	<b>DEG</b>	<b>-</b>	<b>-</b>
SteelFiber i70	R	74	0.355	0.600	3.3	Mid-High	Exotic-Special Order
SteelFiber i70	S	74	0.355	0.600	3.0	Mid-High	Exotic-Special Order
SteelFiber i80	R	85	0.355	0.600	2.5-2.9	Mid	Exotic-Special Order
SteelFiber i80	S	85	0.355	0.600	2.5-2.9	Mid	Exotic-Special Order
SteelFiber i95	R	95	0.355	0.602	2.1-2.5	Mid	Exotic-Special Order
SteelFiber i95	X	95	0.355	0.602	1.8-2.3	Low-Mid	Exotic-Special Order
SteelFiber i110	S	110	0.355	0.605	1.5-1.9	Low-Mid	Exotic-Special Order
SteelFiber i110	X	110	0.355	0.605	1.5-1.9	Low-Mid	Exotic-Special Order

NIPPON	TRADITIONAL FLEX	RAW WEIGHT	TIP OD	BUTT OD	TORQUE	TRAJECTORY	AVAILABILITY
<b>UNITS</b>	<b>-</b>	<b>G</b>	<b>IN</b>	<b>IN</b>	<b>DEG</b>	<b>-</b>	<b>-</b>
NS Pro Modus3 125	S	129	0.355	0.600	1.7	Low	Exotic-Special Order
NS Pro Modus3 125	X	130	0.355	0.600	1.4	Low	Exotic-Special Order
NS Pro Modus3 130	S	124	0.355	0.600	1.2-1.7	Mid	Exotic-Special Order
NS Pro Modus3 130	X	129	0.355	0.600	1.2-1.6	Mid	Exotic-Special Order
NS Pro 950GH	R	95	0.355	0.610	1.8-2.3	Mid	Exotic-Special Order
NS Pro 950GH	S	98	0.355	0.610	1.6-2.0	Mid	Exotic-Special Order

UST MAMIYA	TRADITIONAL FLEX	RAW WEIGHT	TIP OD	BUTT OD	TORQUE	TRAJECTORY	AVAILABILITY
<b>UNITS</b>	<b>-</b>	<b>G</b>	<b>IN</b>	<b>IN</b>	<b>DEG</b>	<b>-</b>	<b>-</b>
UST Recoil 95	F3 - (R)	91	0.355	0.600	3.9	Mid	Exotic-Special Order
Recoil 760 ES	F2 - (A)	65	0.355	0.600	4.2	Mid-High	Exotic-Special Order
Recoil 760 ES	F3 - (R)	68	0.355	0.600	4.1	Mid-High	Exotic-Special Order
Recoil 780 ES	F4 - (S)	86	0.355	0.600	3.5	Mid	Exotic-Special Order
Recoil 780 ES	F5 - (X)	89	0.355	0.600	3.5	Mid	Exotic-Special Order

\*All Exotic shafts have a 2 week lead time.

## IRONS - EXOTIC CUSTOM SHAFTS (ALL TAPER TIPS):

PROJECT X	TRADITIONAL FLEX	RAW WEIGHT	TIP OD	BUTT OD	TORQUE	TRAJECTORY	AVAILABILITY
<b>UNITS</b>	<b>-</b>	<b>G</b>	<b>IN</b>	<b>IN</b>	<b>DEG</b>	<b>-</b>	<b>-</b>
Project X	5.0	115	0.355	0.600	1.6-1.8	Low	Exotic-Special Order
Project X	7.0	130	0.355	0.600	1.6-1.8	Low	Exotic-Special Order

TRUE TEMPER	TRADITIONAL FLEX	RAW WEIGHT	TIP OD	BUTT OD	TORQUE	TRAJECTORY	AVAILABILITY
<b>UNITS</b>	<b>-</b>	<b>G</b>	<b>IN</b>	<b>IN</b>	<b>DEG</b>	<b>-</b>	<b>-</b>
Dynamic Gold	R300	127	0.355	0.600	1.5-1.9	Low	Exotic-Special Order
Dynamic Gold SL	R300	104	0.355	0.600	2.0-2.2	Low	Exotic-Special Order
Dynamic Gold SL	S300	106	0.355	0.600	2.0-2.2	Low	Exotic-Special Order
True Temper AMT Black	R300	94-115	0.355	0.600	N/A	Low	Exotic-Special Order
True Temper AMT Black	S300	95-116	0.355	0.600	N/A	Low	Exotic-Special Order
Dynamic Gold 120	R300	116	0.355	0.600	1.5-1.9	Low	Exotic-Special Order
XP 95	R300	93	0.355	0.600	2.2	Low	Exotic-Special Order
XP 95	S300	95	0.355	0.600	2.0	Low	Exotic-Special Order

KBS	TRADITIONAL FLEX	RAW WEIGHT	TIP OD	BUTT OD	TORQUE	TRAJECTORY	AVAILABILITY
<b>UNITS</b>	<b>-</b>	<b>G</b>	<b>IN</b>	<b>IN</b>	<b>DEG</b>	<b>-</b>	<b>-</b>
C-Taper Lite	R	105	0.355	0.600	2.2	Mid-High	Exotic-Special Order
S Taper Chrome	R	110	0.355	0.600	2.0	Mid	Exotic-Special Order
S Taper Chrome	S	120	0.355	0.600	1.9	Mid	Exotic-Special Order
S Taper Chrome	X	130	0.355	0.600	1.8	Mid	Exotic-Special Order
Tour	R	110	0.355	0.600	1.6-2.0	Mid	Exotic-Special Order
Tour 90	R	95	0.355	0.600	2.5	Mid-High	Exotic-Special Order
Tour-V	R	100	0.355	0.600	2.1	Mid	Exotic-Special Order
Tour-V	S	110	0.355	0.600	2.0	Mid	Exotic-Special Order
Tour-V	X	120	0.355	0.600	1.9	Mid	Exotic-Special Order
Tour FLT	R	110	0.355	0.600	N/A	Mid	Exotic-Special Order
Tour FLT	S	120	0.355	0.600	N/A	Mid	Exotic-Special Order
Tour FLT	X	130	0.355	0.600	N/A	Mid	Exotic-Special Order

\*All Exotic shafts have a 2 week lead time.

# IRONS

# Z 585 Z 785 Z U85

## IRON SHAFT PERFORMANCE



## IRONS - CUSTOM SPECIFICATIONS

Z 585 / Z 785 IRON SETS & Z U85 UTILITY CUSTOM BUILD LENGTHS (INCHES)									
	3	4	5	6	7	8	9	P	A
Z 585 Iron Sets	39.0	38.5	38.0	37.5	37.0	36.5	36.0	35.5	35.5
Z 785 Iron Sets	39.0	38.5	38.0	37.5	37.0	36.5	36.0	35.5	35.5
	18°	20°	23°	26°	29°				
Z U85 Utility (Steel)	39.5	39.0	38.5	38.0	37.5				
Z U85 Utility (Graphite)	40.0	39.5	39.0	38.5	38.0				

Custom build lengths are the same as standard build lengths. Swingweights may vary depending on the custom shaft used.

### IMPORTANT INFORMATION: Z 585 AND Z 785 IRONS

The Z 585, and Z 785 Iron Sets were developed with the following standard steel shaft specifications (inches):

	3	4	5	6	7	8	9	P
Uncut Shaft Length	40.5	40.0	39.5	39.0	38.5	38.0	37.5	37.0

This shaft configuration is designed to maximize performance for the Z 585, Z 785, and Z Forged Iron Sets. Strong-stepped and "double" strong-stepped custom configurations are also available for these shafts. For all custom iron shafts, traditional soft-stepping and strong-stepping custom configurations are available. Please contact Srixon/Cleveland Golf customer service at (800) 999-6263 if you have any questions.

Loft and Lie Bending		Length	
Lie Angle Range	-3° thru +3°	Steel:	-2" thru +2", or Uncut
(All Irons)	1° increments		1/4" increments
Loft Range	2° Strong thru 2° Weak	Graphite:	-2" thru +2", or Uncut
	1° increments		1/4" increments

Note: Some over length options are not available pending shaft or tipping options.

# PREMIUM SHAFTS COME STANDARD

Project X HZRDU delivers insane distance for the stronger and more aggressive golfer, without sacrificing control. Featuring increased stiffness along the full length of the golf shaft, you can put more power behind the ball while keeping spin low and maintaining control.

The Z 785 Driver features a Hand Crafted Project X HZRDU Black shaft, produced exclusively in Project X's R&D laboratory in San Diego, CA. Each layer is cut and rolled by hand.

The Z 585 Driver and Z F85 Fairway Woods feature the Project X HZRDU Red, which uses a more active tip section to deliver a higher peak trajectory without sacrificing distance or control.

The Z H85 Hybrid features the Project X HZRDU Black shaft, which promotes the low spinning, penetrating trajectory preferred by the best players in the world.



# ADJUSTABILITY PERFECTS PERFORMANCE QUICK TUNE SYSTEM


## CUSTOMIZATION = CONSISTENCY

Work *with* the characteristics of your swing—not against them—to experience your most consistent long game performance yet.

An adjustable hosel sleeve allows you to select the loft, lie, and face angle that best suit your swing. Interchangeable weights allow you to change swing weight for total customization.

## HOW TO ADJUST LOFT, LIE, AND FACE ANGLE

Adjustable loft and lie only available on the Z 785 Driver.

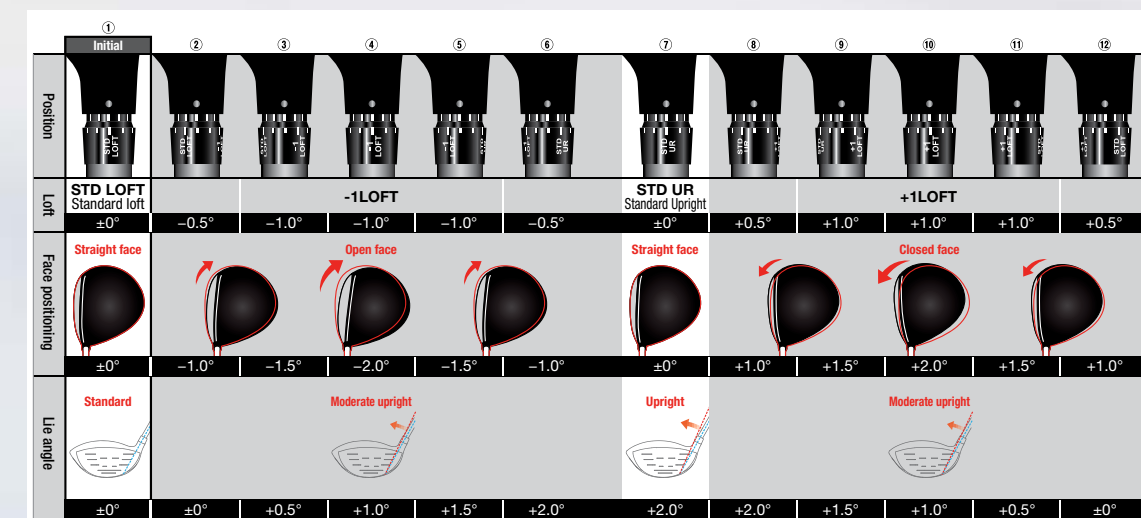

## Z SERIES WEIGHTS



\*8g (stainless) weight is installed at purchase.  
4g, 6g, 10g, and 12g sold separately.

## Z SERIES TORQUE WRENCH



Only included with the Z 785 Driver

WOODS

**Z 585 Z 785 Z F85**

**WOODS - STOCK SHAFTS:**

Z 585/Z 785 DRIVER Z F85 FAIRWAY	TRADITIONAL FLEX	RAW WEIGHT	TIP OD	BUTT OD	TORQUE	TRAJECTORY	AVAILABILITY
<b>UNITS</b>	<b>-</b>	<b>G</b>	<b>IN</b>	<b>IN</b>	<b>DEG</b>	<b>-</b>	<b>-</b>
HZRDU5 Handcrafted Black 65	5.5	62	0.335	0.600	3.2	Low	At Once
HZRDU5 Handcrafted Black 65	6	62	0.335	0.600	3.2	Low	At Once
HZRDU5 Handcrafted Black 65	6.5	62	0.335	0.600	3.2	Low	At Once
HZRDU5 Red 65	5.5	62	0.335	0.600	3.2	Mid	At Once
HZRDU5 Red 65	6.0	62	0.335	0.600	3.2	Mid	At Once
HZRDU5 Red 65	6.5	62	0.335	0.600	3.2	Mid	At Once

**WOODS - AT ONCE CUSTOM SHAFTS:**

FUJIKURA	TRADITIONAL FLEX	RAW WEIGHT	TIP OD	BUTT OD	TORQUE	TRAJECTORY	AVAILABILITY
<b>UNITS</b>	<b>-</b>	<b>G</b>	<b>IN</b>	<b>IN</b>	<b>DEG</b>	<b>-</b>	<b>-</b>
Atmos Tour Spec 6 Black	S	65	0.335	0.605	3.4	Low	At Once
Atmos Tour Spec 6 Black	X	69	0.335	0.610	3.4	Low	At Once

MITSUBISHI	TRADITIONAL FLEX	RAW WEIGHT	TIP OD	BUTT OD	TORQUE	TRAJECTORY	AVAILABILITY
<b>UNITS</b>	<b>-</b>	<b>G</b>	<b>IN</b>	<b>IN</b>	<b>DEG</b>	<b>-</b>	<b>-</b>
Tensei CK Pro Blue 60	S	64	0.335	0.627	4.0	Mid	At Once
Tensei CK Pro Blue 60	TX	68	0.335	0.631	3.9	Mid	At Once
Tensei CK Pro Orange 70	S	72	0.335	0.608	2.9	Low	At Once
Tensei CK Pro Orange 70	TX	73	0.335	0.598	2.6	Low	At Once

**WOODS - AT ONCE CUSTOM SHAFTS:**

MIYAZAKI	TRADITIONAL FLEX	RAW WEIGHT	TIP OD	BUTT OD	TORQUE	TRAJECTORY	AVAILABILITY
<b>UNITS</b>	<b>-</b>	<b>G</b>	<b>IN</b>	<b>IN</b>	<b>DEG</b>	<b>-</b>	<b>-</b>
Kaula Mizu 6	R	62	0.335	0.606	3.4	Mid-High	At Once
Kaula Mizu 6	S	65	0.335	0.610	3.4	Mid-High	At Once
Kaula Mizu 6	X	66	0.335	0.612	3.4	Mid-High	At Once

PROJECT X	TRADITIONAL FLEX	RAW WEIGHT	TIP OD	BUTT OD	TORQUE	TRAJECTORY	AVAILABILITY
<b>UNITS</b>	<b>-</b>	<b>G</b>	<b>IN</b>	<b>IN</b>	<b>DEG</b>	<b>-</b>	<b>-</b>
HZRDU5 Handcrafted Black 65	5.5	62	0.335	0.600	3.2	Low	At Once
HZRDU5 Handcrafted Black 65	6.0	62	0.335	0.600	3.2	Low	At Once
HZRDU5 Handcrafted Black 65	6.5	62	0.335	0.600	3.2	Low	At Once
HZRDU5 Handcrafted Black 75	6.0	75	0.335	0.600	2.9	Low	At Once
HZRDU5 Handcrafted Black 75	6.5	75	0.335	0.600	2.9	Low	At Once
HZRDU5 Handcrafted Yellow 65	5.5	63	0.335	0.615	3.3	Low	At Once
HZRDU5 Handcrafted Yellow 65	6.0	63	0.335	0.615	3.3	Low	At Once
HZRDU5 Handcrafted Yellow 65	6.5	63	0.335	0.615	3.3	Low	At Once
HZRDU5 Handcrafted Yellow 75	5.5	75	0.335	0.610	2.9	Low	At Once
HZRDU5 Handcrafted Yellow 75	6.0	75	0.335	0.610	2.9	Low	At Once
HZRDU5 Handcrafted Yellow 75	6.5	75	0.335	0.610	2.9	Low	At Once
HZRDU5 Red 65	5.5	62	0.335	0.600	3.2	Mid	At Once
HZRDU5 Red 65	6.0	62	0.335	0.600	3.2	Mid	At Once
HZRDU5 Red 65	6.5	62	0.335	0.600	3.2	Mid	At Once
EvenFlow Handcrafted Blue 65	6.0	67	0.335	0.625	3.7	Mid	At Once
EvenFlow Handcrafted Blue 65	6.5	69	0.335	0.625	3.2	Mid	At Once

UST MAMIYA	TRADITIONAL FLEX	RAW WEIGHT	TIP OD	BUTT OD	TORQUE	TRAJECTORY	AVAILABILITY
<b>UNITS</b>	<b>-</b>	<b>G</b>	<b>IN</b>	<b>IN</b>	<b>DEG</b>	<b>-</b>	<b>-</b>
Helium 4F2	A	49	0.335	0.600	6.3	High	At Once
Helium 4F3	R	49	0.335	0.600	6.2	High	At Once
Helium 4F4	S	40	0.335	0.600	6.2	High	At Once



WOODS

**Z585 Z785 ZF85**

**WOODS - EXOTIC CUSTOM SHAFTS:**

ALDILA	TRADITIONAL FLEX	RAW WEIGHT	TIP OD	BUTT OD	TORQUE	TRAJECTORY	AVAILABILITY
UNITS	-	G	IN	IN	DEG	-	-
RIP 60 Alpha	S	62	0.335	0.615	3.1	Low-Mid	Exotic-Special Order
Rogue I/O 60	S	64	0.335	0.637	3.8	Low-Mid	Exotic-Special Order
Rogue Silver 60	S	69	0.335	0.635	3.4	Low-Mid	Exotic-Special Order
Rogue Silver 60	X	72	0.335	0.635	3.1	Low-Mid	Exotic-Special Order
Rogue Silver 70	S	77	0.335	0.640	3.1	Low-Mid	Exotic-Special Order
Rogue Silver 70	X	78	0.335	0.645	2.8	Low-Mid	Exotic-Special Order
Rogue Black 60	S	68	0.335	0.640	3.6	Mid	Exotic-Special Order
Rogue Black 60	X	70	0.335	0.645	3.3	Mid	Exotic-Special Order
Rogue Black 70	S	74	0.335	0.640	3.3	Mid	Exotic-Special Order
Rogue Black 70	X	75	0.335	0.645	3.0	Mid	Exotic-Special Order
Rogue Black 80	S	85	0.335	0.640	2.8	Mid	Exotic-Special Order
Rogue Black 80	X	86	0.335	0.640	2.6	Mid	Exotic-Special Order

FUJIKURA	TRADITIONAL FLEX	RAW WEIGHT	TIP OD	BUTT OD	TORQUE	TRAJECTORY	AVAILABILITY
UNITS	-	G	IN	IN	DEG	-	-
Atmos Tour Spec 6 Red	S	67	0.335	0.605	3.5	Mid-High	Exotic-Special Order
Atmos Tour Spec 6 Red	X	69	0.335	0.605	3.5	Mid-High	Exotic-Special Order
Atmos Tour Spec 6 Blue	S	64	0.335	0.610	3.5	Mid	Exotic-Special Order
Atmos Tour Spec 6 Blue	X	65	0.335	0.610	3.5	Mid	Exotic-Special Order
Atmos Tour Spec 7 Blue	S	74	0.335	0.615	3.1	Mid	Exotic-Special Order
Atmos Tour Spec 7 Blue	X	77	0.335	0.615	3.1	Mid	Exotic-Special Order
Atmos Tour Spec 7 Black	X	76	0.335	0.615	3.0	Low	Exotic-Special Order
Atmos Tour Spec 8 Black	TX	85	0.335	0.615	2.7	Low	Exotic-Special Order
Speeder Evolution IV 757	S	77	0.335	0.605	2.7	Mid-High	Exotic-Special Order
Speeder Evolution IV 757	X	78.5	0.335	0.610	2.7	Mid-High	Exotic-Special Order
Speeder Evolution IV 661	S	67	0.335	0.605	3.3	Mid-High	Exotic-Special Order
Speeder Evolution IV 661	X	68.5	0.335	0.605	3.2	Mid-High	Exotic-Special Order
Speeder Evolution IV 569	R	56	0.335	0.600	3.9	Mid-High	Exotic-Special Order
Speeder Evolution IV 569	S	59	0.335	0.600	3.8	Mid-High	Exotic-Special Order

GRAPHITE DESIGN	TRADITIONAL FLEX	RAW WEIGHT	TIP OD	BUTT OD	TORQUE	TRAJECTORY	AVAILABILITY
UNITS	-	G	IN	IN	DEG	-	-
Tour AD DI-6	SR	64	0.335	0.595	3.2	Mid	Exotic-Special Order
Tour AD DI-6	S	68	0.335	0.605	3.1	Mid	Exotic-Special Order
Tour AD DI-6	X	69	0.335	0.605	3.1	Mid	Exotic-Special Order

**WOODS - EXOTIC CUSTOM SHAFTS:**

MITSUBISHI	TRADITIONAL FLEX	RAW WEIGHT	TIP OD	BUTT OD	TORQUE	TRAJECTORY	AVAILABILITY
UNITS	-	G	IN	IN	DEG	-	-
Tensei CK Pro Blue 70	S	73	0.335	0.629	3.2	Mid	Exotic-Special Order
Tensei CK Pro Blue 70	TX	77	0.335	0.635	3.2	Mid	Exotic-Special Order


MID-HIGH	TRADITIONAL FLEX	RAW WEIGHT	TIP OD	BUTT OD	TORQUE	TRAJECTORY	AVAILABILITY
UNITS	-	G	IN	IN	DEG	-	-
Kaula Kiri 5	R	54	0.335	0.600	3.8	High	Exotic-Special Order
Kaula Kiri 8	X	83	0.335	0.638	2.7	High	Exotic-Special Order
Kaula Mizu 5	R	54	0.335	0.598	3.8	Mid-High	Exotic-Special Order
Kaula Mizu 5	S	57	0.335	0.600	3.8	Mid-High	Exotic-Special Order
Kaula Mizu 7	S	73	0.335	0.620	2.9	Mid-High	Exotic-Special Order
Kaula Mizu 7	X	74	0.335	0.624	2.9	Low-Mid	Exotic-Special Order
Kaula Mizore 5	R	54	0.335	0.593	3.8	Low-Mid	Exotic-Special Order
Kaula Mizore 5	S	57	0.335	0.594	3.8	Low-Mid	Exotic-Special Order
Kaula Mizore 6	R	62	0.335	0.600	3.4	Low-Mid	Exotic-Special Order
Kaula Mizore 6	S	65	0.335	0.604	3.4	Low-Mid	Exotic-Special Order
Kaula Mizore 6	X	66	0.335	0.606	3.4	Low-Mid	Exotic-Special Order
Kaula Mizore 7	S	73	0.335	0.614	2.9	Low-Mid	Exotic-Special Order
Kaula Mizore 7	X	74	0.335	0.618	2.9	Low-Mid	Exotic-Special Order
Kaula Mizore 8	X	83	0.335	0.632	2.7	Low-Mid	Exotic-Special Order
Kaula Kori 5	R	54	0.335	0.594	3.8	Low	Exotic-Special Order
Kaula Kori 5	S	57	0.335	0.598	3.8	Low	Exotic-Special Order
Kaula Kori 6	S	65	0.335	0.606	3.4	Low	Exotic-Special Order
Kaula Kori 7	S	73	0.335	0.618	2.9	Low	Exotic-Special Order
Kaula Kori 7	X	74	0.335	0.620	2.9	Low	Exotic-Special Order
Kaula Kori 8	X	83	0.335	0.634	2.7	Low	Exotic-Special Order

PROJECT X	TRADITIONAL FLEX	RAW WEIGHT	TIP OD	BUTT OD	TORQUE	TRAJECTORY	AVAILABILITY
UNITS	-	G	IN	IN	DEG	-	-
HZRDU5 Handcrafted Red 75	5.5	75	0.335	0.600	2.9	Mid	Exotic-Special Order
HZRDU5 Handcrafted Red 75	6.0	75	0.335	0.600	2.9	Mid	Exotic-Special Order
HZRDU5 Handcrafted Red 75	6.5	75	0.335	0.600	2.9	Mid	Exotic-Special Order
EvenFlow Handcrafted	5.5	65	0.335	0.625	4.6	Mid	Exotic-Special Order
EvenFlow Handcrafted	5.5	76	0.335	0.625	4.3	Mid	Exotic-Special Order
EvenFlow Handcrafted	6.0	78	0.335	0.625	3.5	Mid	Exotic-Special Order
EvenFlow Handcrafted	6.5	79	0.335	0.625	2.8	Mid	Exotic-Special Order

WOODS

**Z 585 Z 785 Z F85**

**WOODS SHAFT PERFORMANCE**

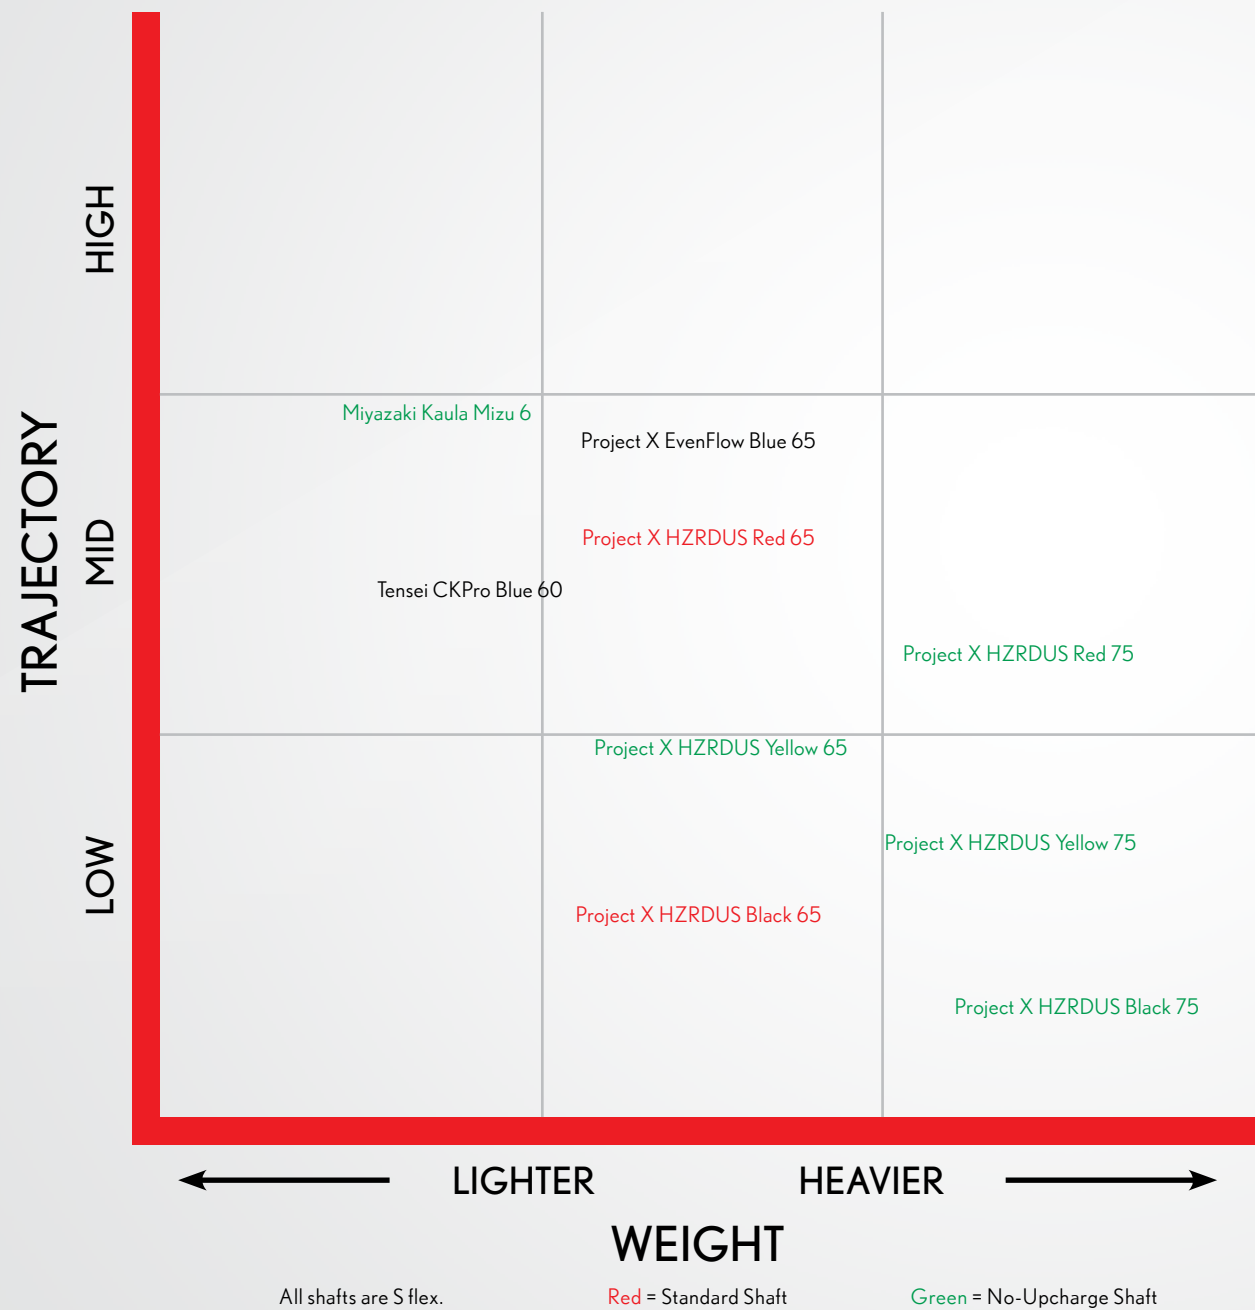

**WOODS - CUSTOM SPECIFICATIONS**

Total club weight and swingweight may deviate from standard production specifications.

Custom shafts are built to same length as standard clubs:

Club	Length
Z 585 Driver (All Lofts)	45.25"
Z 785 Driver (All Lofts)	45.25"
Z F85 Fairway (3+)	43.0"
Z F85 Fairway (3)	43.0"
Z F85 Fairway (5)	42.5"

Length and Tip Cut Custom	
Custom Shaft Length*	-1" to +2" by 1/4" increments
Custom Tip Cut*	1/2", 1"

\*Note: Some over length options are not available pending shaft or tipping options. For detailed information, please call Srixon/Cleveland Golf customer service at (800) 999-6263.



# HYBRIDS



## HYBRIDS - STOCK SHAFTS:

Z H85 HYBRID	TRADITIONAL FLEX	RAW WEIGHT	TIP OD	BUTT OD	TORQUE	TRAJECTORY	AVAILABILITY
UNITS	-	G	IN	IN	DEG	-	-
HZRDUS Black 85 Hyb	5.5	85	0.370	0.600	2.5	Mid	At Once
HZRDUS Black 85 Hyb	6	85	0.370	0.600	2.5	Mid	At Once
HZRDUS Black 85 Hyb	6.5	85	0.370	0.600	2.5	Mid	At Once

## HYBRIDS - AT ONCE CUSTOM SHAFTS:

MIYAZAKI	TRADITIONAL FLEX	RAW WEIGHT	TIP OD	BUTT OD	TORQUE	TRAJECTORY	AVAILABILITY
UNITS	-	G	IN	IN	DEG	-	-
Kaula 7 Hybrid*	R	71	0.370	0.602	3.4	Mid	At Once
Kaula 7 Hybrid*	S	73	0.370	0.604	3.4	Mid	At Once
Kaula 7 Hybrid*	X	74	0.370	0.608	3.4	Mid	At Once

PROJECT X	TRADITIONAL FLEX	RAW WEIGHT	TIP OD	BUTT OD	TORQUE	TRAJECTORY	AVAILABILITY
UNITS	-	G	IN	IN	DEG	-	-
HZRDUS Black 85 Hyb	5.5	85	0.370	0.600	2.5	Low	At Once
HZRDUS Black 85 Hyb	6.0	85	0.370	0.600	2.5	Low	At Once
HZRDUS Black 85 Hyb	6.5	85	0.370	0.600	2.5	Low	At Once


## HYBRIDS - EXOTIC CUSTOM SHAFTS:

ALDILA	TRADITIONAL FLEX	RAW WEIGHT	TIP OD	BUTT OD	TORQUE	TRAJECTORY	AVAILABILITY
UNITS	-	G	IN	IN	DEG	-	-
Rogue Black 85	S	88	0.370	0.615	2.8	Mid	Exotic-Special Order
Rogue Black 85	X	91	0.370	0.630	2.4	Mid	Exotic-Special Order
Tour Blue 85	S	86	0.370	0.630	2.5	Mid	Exotic-Special Order
Tour Blue 85	X	86	0.370	0.629	2.3	Mid	Exotic-Special Order
Tour Blue 85	TX	86	0.370	0.626	2.2	Mid	Exotic-Special Order
Tour Green 85	S	86	0.370	0.625	2.9	Low-Mid	Exotic-Special Order
Tour Green 85	X	86	0.370	0.625	2.7	Low-Mid	Exotic-Special Order
Tour Green 85	TX	86	0.370	0.625	2.6	Low-Mid	Exotic-Special Order

PROJECT X	TRADITIONAL FLEX	RAW WEIGHT	TIP OD	BUTT OD	TORQUE	TRAJECTORY	AVAILABILITY
UNITS	-	G	IN	IN	DEG	-	-
HZRDUS Handcrafted Black 85 Hyb	5.5	85	0.370	0.600	2.5	Low	Exotic-Special Order
HZRDUS Handcrafted Black 85 Hyb	6.0	85	0.370	0.600	2.5	Low	Exotic-Special Order
HZRDUS Handcrafted Black 85 Hyb	6.5	85	0.370	0.600	2.5	Low	Exotic-Special Order

\*All Exotic shafts have a 2 week lead time.

## HYBRIDS SHAFT PERFORMANCE

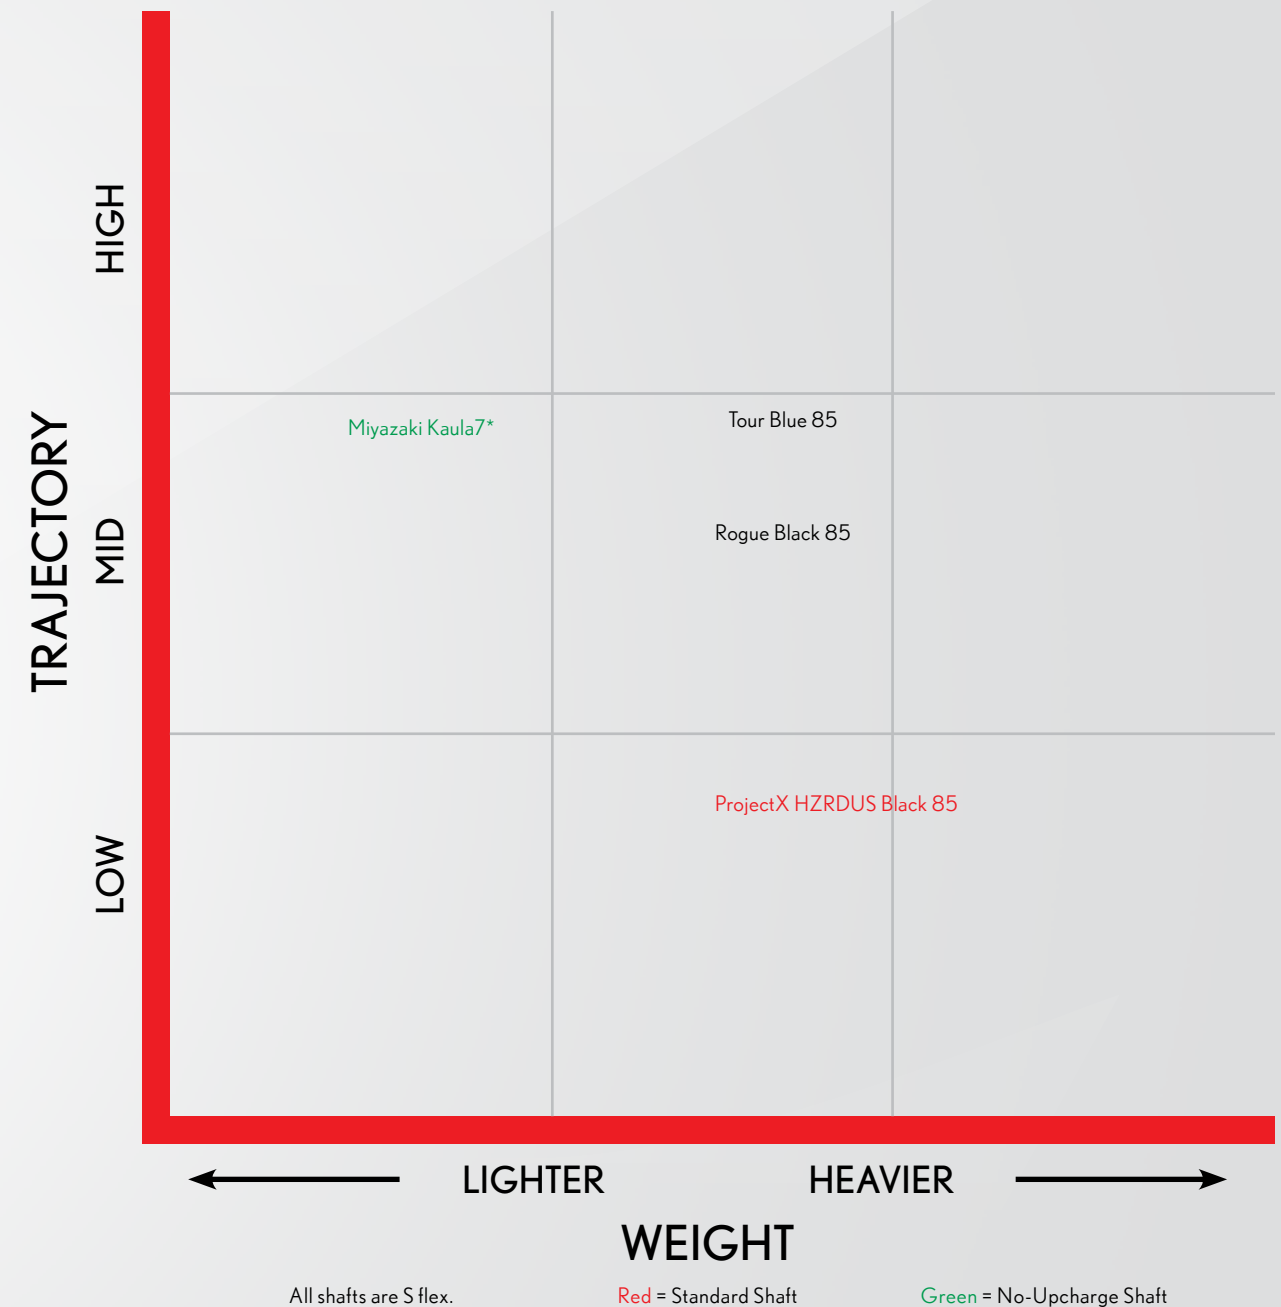

## HYBRIDS - CUSTOM SPECIFICATIONS

Total club weight and swingweight may deviate from standard production specifications.

Custom shafts are built to same length as standard clubs:

Club	Length
Z H85 Men's Hybrid 2	40.75"
Z H85 Men's Hybrid 3	40.25"
Z H85 Men's Hybrid 4	39.75"

Length and Tip Cut Custom	
Custom Shaft Length*	.1" to 2" by 1/4" increments
Custom Tip Cut*	1/2", 1"

\*Note: Some over length options are not available pending shaft or tipping options.

# GRIPS - ALL CLUBS

STANDARD GRIP OPTIONS	WEIGHT (G)	PRODUCTS
Golf Pride Tour Velvet 360	50 52 (ST IRONS)	Z 585 Driver, Z 785 Driver, Z F85 Fairway, Z H85 Hybrid, Z 585 Iron Set, Z 785 Iron Set, Z U85 Utility Iron

GOLF PRIDE CUSTOM GRIPS	WEIGHT (G)	CORD / NON CORD	RIB OPTION AVAILABLE
Tour Velvet	51	Non	Yes
Tour Velvet Full Cord	52	Cord	Yes
Tour Velvet Midsize	53.5	Non	No
Tour Velvet Jumbo	61	Non	No
2G Tour Wrap (Black, White, Red)	48	Non	No
2G Tour Wrap Midsize (Black)	58	Non	No
CP2 Pro (Red)	51.5	Non	No
CP2 Wrap (Blue)	51.5	Non	No
CP2 Wrap Midsize (Blue)	63.5	Non	No
MCC Plus 4 (Blue, Red, Grey, Orange, Green)	52	1/2 Cord	No
MCC Plus 4 Midsize (Grey)	66	1/2 Cord	No
New Decade Multi Compound (Wht/Blk, Blu/Blk, or Red/Blk)	45	1/2 Cord	No
New Decade Multi Compound Midsize (Blu/Blk)	59	1/2 Cord	No
Z-Cord	50.5	Cord	No
MCC Align Blk/Wht	51	1/2 Cord	Yes
MCC Plus 4 Align Gry	52	1/2 Cord	Yes

LAMKIN CUSTOM GRIPS	WEIGHT (G)	CORD / NON CORD	RIB OPTION AVAILABLE
Crossline	52	Non	Yes
Crossline Midsize	63	Non	No
Crossline Tour (Blk, Red)	50	Non	No
UTx (Black, Blue, Red)	52	Cord	No
UTx Midsize* (Red)	65.5	Cord	No
UTx Wrap (Black, Blue, Red)	52	Cord	No

WINN CUSTOM GRIPS	WEIGHT (G)	CORD / NON CORD	RIB OPTION AVAILABLE
Dri-Tac	48	Non	No
Dri-Tac Midsize	49	Non	No
Excel (Black)	42	Non	No
Excel Midsize (Black)	43	Non	No
Excel Oversize (Black)	47	Non	No
Pro Wrap	52	Non	No

All grips available: Std, +1 wrap (+1/64"), +2 wraps, +3 wraps



Graeme McDowell  
PGA Tour Professional





**5601 SKYLAB ROAD  
HUNTINGTON BEACH, CA 92647**

©2018 Srixon/Cleveland Golf  
Srixon, Spin Skin, Z-STAR and Q-STAR are registered trademarks of Srixon/Cleveland Golf/XXIO,  
a division of Sumitomo Rubber Industries, Ltd. Soft Feel, Marathon, Dedicated to Improving Your Game,  
Tour V.T. Sole are trademarks of Srixon/Cleveland Golf/XXIO, a division of Sumitomo Rubber Industries, Ltd. All other brand and product names are trademarks of their respective companies.