

STC009 / STEELCOAT

Metal-Suspended-Ceiling-Coating

Technical & Specification Data Sheet


Supplied By :

Procoat UK Ltd- CeilCote
26 Fenlake Business Centre
Fengate
Peterborough
PE1 5BQ

Tel :01733 558251

Email : info@ceilcote.com

Website: www.ceilcote.com

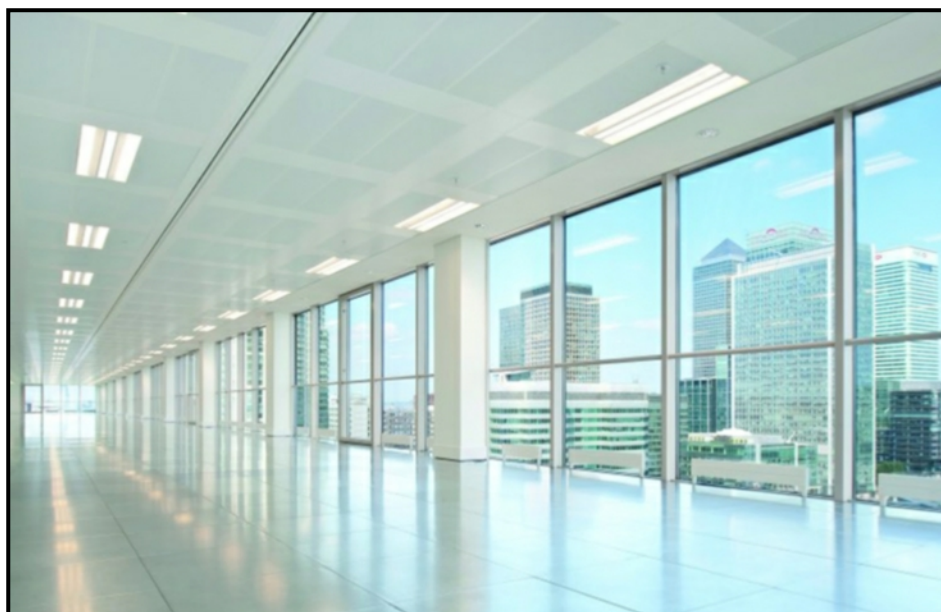

STC009 / STEELCOAT

Metal-Suspended-Ceiling-Coating

Product Description:


STC009 Steelcoat is a water based , low odour restoration coating specifically designed to refurbish existing metal suspended ceilings in situ. Ideal for metal suspended ceiling systems such as Burgess, SAS International , Armstrong and Luxalon.

Acoustic properties are maintained and the finish is scrub resistant and durable. The non-yellowing formula will extend the life cycle of the ceiling far beyond the manufacturers intended timescale.

Future applications can be repeated many times without degrading the original qualities of the suspended ceiling.

STC009 Steelcoat has been specified and used to restore vast amounts of metal suspended ceilings over the past 20 years

- Intended for commercial premises such as offices, supermarkets, airports, hotels, Schools and hospitals.

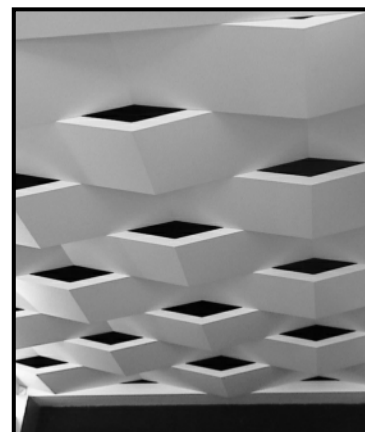

Performance Properties:

- Acoustic performance retained
- Grids and tiles coated in situ at the same time
- Non bridging - Tiles will not stick to the grid support system
- Non yellowing - Lasts as long as a new ceiling
- Aftercare and maintenance is the same as a new ceiling
- Designed for airless spray application for fast results
- Covers heavy stains
- Water based
- Low odour / No residual odour
- Consistent colour / High opacity
- Can also be used on vent grills
- Available in RAL and BS Colours

Specification :

Adhere CeilCote 50mm x 50m differential double sided adhesive tape around the perimeter of the upper walls as close to the suspended ceiling as possible. Hang CeilCote 250m x 5m polythene sheeting from the double sided tape to protect and encapsulate the work area. Use the same sheeting to protect workspace items such as desks, computers, chairs, cabinets, stock, chillers, gondolas and checkouts. Use static brushes or a vacuum to remove ceiling dust and loose surface dirt. Precision mask ceiling fixtures such as light fittings, vents and fire sprinklers ect. Pre treat stains with Ceilblock aerosol sealer. Remove any surface contaminants from tiles and support grid such as grease ,oil, dirt wax with CeilCote hard surface cleaner.

- Apply STC009 Metal-Suspended-ceiling-coating by airless spray. One full coat in each direction.

Application :

STC009 Metal-Suspended-Ceiling-Coating is ready to use no dilution is normally required. Mechanically shake or stir thoroughly before using.

- Airless Spraying : 0.013 “ to 0.015” tip at 2000 to 2500 P.S.I 50 % overlap each pass.
- Thinning if required : up to 5% water
- Temp: 10 up to 32c air and surface temperature

Personel Protective equipments:

Respirator organic vapour / dust mask. CE approved EN140:1996. Overalls, Goggles, Gloves

Clean up : Clean up spills and drips with a wet cloth/ sponge. Wash tools in warm soapy water

Disposal : Dispose of unused or unwanted product in accordance with local laws regulating water-based coatings.

Technical Data: **STC009 / STEELCOAT**
Metal-Suspended-Ceiling-Coating

Appearance: Liquid
Odour: Slight Odour
Coverage: 10m2 Per litre by airless spray application
Touch Dry : 30 Minutes
Colour: White 00E55 Can be tinted to RAL colours
Sheen Level: 20 %
Miscibility with water: Fully miscible
Solids : 47.6 %
Container Size: 20 Litres
Container Weight: 30 KG
Storage: Indoors, Above Freezing

**Contact:**

Procoat UK Ltd- CeilCote
26 Fenlake Business Centre
Fengate
Peterborough
PE1 5BQ
Tel: 01733 558251
Fax: 01733 891899
Email: info@ceilcote.com
Web: www.ceilcote.com

