
Product Overview Conductix-Wampfler Cables









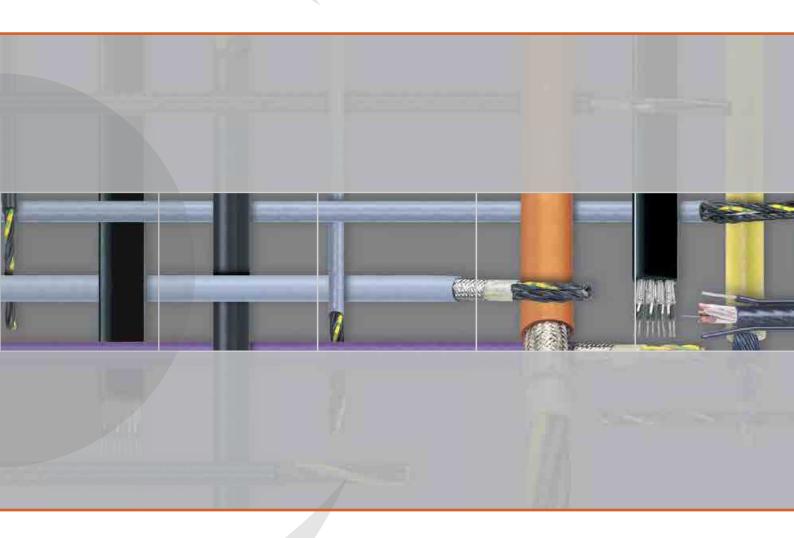

Advantage 1 Secure choice of cables

 Comprehension of our customers applications and needs is the foundation of our choice. We offer the complete package with systems and cables that match perfectly to your application

Advantage 2 System compatibility

 The cable design significantly influences the performance of the energy and/or data supply system – we ensure the proper alignment of the cable to the system for optimized energy and data transfer.

Advantage 3 Manufacturer independence

 The performance of the cable is more important to us than its origin – we neutrally select only the most technically qualified cables available on the market. Additionally we conduct our own test scenarios on our systems to ensure best functionality

Advantage 4 System guarantee

• Each complete Conductix-Wampfler system is provided with a comprehensive guarantee — this, needless to say, includes the cable.

Advantage 5 Conductix-Wampfler cable service

 Conductix-Wampfler services ensure the reliability of our energy supply systems and the availability of our customers equipment.

Contents

Cables-Overview At a glance	4
Cables for Festoon Systems	7
• Cables for Cable Chains	9
Cables for Reeling Systems	11
Customized Cable Service	13
Questionaire Cables	14

At a glance

The right cable for every application

Application												
			Basic Reelir	ng Systems)		Heavy Duty Reeling Systems					
Power / Control						000						
	MALT	GPM	RP	RG	WG	WGF	C800	GPM-RF	RXP	RXG	TRA	HVR
Composite Power + Control +			() () () () () () () () () ()			0000						
Data 			RP-D	RG-D	WG-D	WGF-D			RXP-D	RXG-D		HVR-F0
Label respectively Design	Conductix-Wampfler	Conductix-Wampfler	12YRDT11YH	NSHTOEU-J	Conductix-Wampfler	(N)TSFLCGEWOEU	Conductix-Wampfler	Conductix-Wampfler	12YHRDT11YH	(N)SHTOEU-J	Conductix-Wampfler	Conductix-Wampfler
Outer jacket material	PVC	PUR	PUR	Rubber	Rubber	Rubber	PVC	PUR	PUR	Rubber	PUR	Rubber
Suitable for use outdoors	•	•	•	•	•	•	•	•	•	•	•	•
Voltage range	0.6/1 kV	0.6/1 kV	up to 0.6/1 kV	0.6/1 kV	3.6/6 kV up to 12/20 kV	3.6/6 kV up to 12/20 kV	0.6/1 kV	0.6/1 kV	up to 0.6/1 kV	0.6/1 kV	0.6/1 kV	3.6/6 kV up to 12/20 kV
Tensile load capacity max. [N / mm²]	10	12	15	15	20	15	15	20	25	30	30	20
Travel speed max. [m / min]	40	60	80	120	120	120	60	90	180	240	200	180
Temperature range flexing	-20 up to	-25 up to	-20 up to	-25 up to	-25 up to	-25 up to	-10 up to	-25 up to	-40 up to	-35 (1 up to	-25 up to	-30 (2 up to
[°C]	60	60	70	80	80	80	60	60	80	60	80	80

^{(1 -45 °}C on request (2 -45 °C on request

Specialities

- Special cables with compounds for low temperature environments down to -50°C available on request
- Special cables with compounds and protection for very high temperatures up to 180°C available on request
- Specific cables for use in all kinds of water (e.g. drinking, waste water etc.) are available on request

Extra Heavy Duty Reeling Systems		Basic Festoon Hea			vy Duty Festoon		Basic Chain		Specials			
			*8*****							•		
WXG	RXX	TRA-RF	FV	TG	FXG	TXP	TXG	CV	СХР	PV	SXP	SXG
			\$ \$ \$ \$ \$ \$ \$									
WXG-D	RXX-D		FV-D		FXG-D	TXP-D	TXG-D	CV-D	CXP-D		SXP-D	
(N)TSKCGEWOEU	(N)SHTOEU-J	Conductix-Wampfler	HO5VVH6-F YCFLY HO7VVH6-F YFLY / YFLCY	HO7RN-F	NGFLGOEU-J (UL) (N)GLFGOEU-J (UL) M(StD)HOEU (UL) GCFLGOEU	12YHRD11YH 12YHRDC11YH	(N)GRDGOEU-J/O (N)GRDGCGOEU-J/O (N)3GRD5G (N)3GRDGC5G	YRDMY YRDMCY	(N)GRDGOEU-J/O	MTTY-0 FYMYTW	YSLZ3SOE-J/O YSLZ3SOE-J	NTMCWOEU
Rubber	Rubber	PUR	PVC	Rubber	Rubber	PUR	Rubber	PVC	PUR	PVC	PUR / PVC	Rubber
•	•	•	•	•	•	•	•	•	•	•	•	•
3.6/6 kV up to 12/20 kV	0.6/1 kV	0.6/1 kV	up to 450/750 V	up to 450/750 V	up to 300/500 V (600 V)	up to 0.6/1 kV	up to 0.6/1 kV	up to 0.6/1 kV	up to 0.6/1 kV	mV up to 35 kV	mV up to 0.6/1 kV	mV up to 35 kV
20	30+	30+	15	15	15	15	15	15	15	15 up to 30	15 up to 30	15
300	240 *	240	120	120	180	210	240	140	up to 300	various	various	-
-35 up to 80	-35 up to 80	-25 up to 60	-20 up to 60	-30 up to 60	-35 up to 80	-30 up to 90	-35 up to 80	-5 up to 80	-35 up to 80	various	various	-25 up to 80

* up to 300 m/min • ideal • limited



Conductix-Wampfler Cables

for Festoon Systems

Special features of cables for Festoon Systems

- Low weight and small diameter due to a stranded layered conception. In the case of power cables, the earth conductor is split into three conductors.
- Resistant to alternating bending loads due to finely stranded conductors
- Sheathing compounds with very high resistance to outdoor atmospheric conditions
- Notch-resistant sheathing compounds with high resistance to tearing, highly resistant to stress caused by continuous bending at the bottom of the loop
- Robust outer sheath designed to absorb impact forces
- High axial rigidity and resilience due to pressure filled extrusion in interstices
- Highly resilient cables allow the smallest possible bending radius and therefore, short system lengths

Prominent places of particular impacts

Towing trolley/clamp

- Very high acceleration and travel speed rates in the system, high dynamic bending and tensile stress on the cable
- Largest required clamping force on the cable support of the trolley

Cable clamp

 Relative movements of the cables respectively to each other require robust sheathing materials

• Movement of the cable loop at the cable clamps




Cable support

- Compressive stress resulting from clamping the cable at the support, double clamps utilized in systems with high travel speeds
- Permanent defined bending of the cable, weight is absorbed at the cable support

Bottom of the loop

- Uniform alternating bending stress
- Non-uniform, mechanical load caused by jerky movements coupled with forces generated by wind

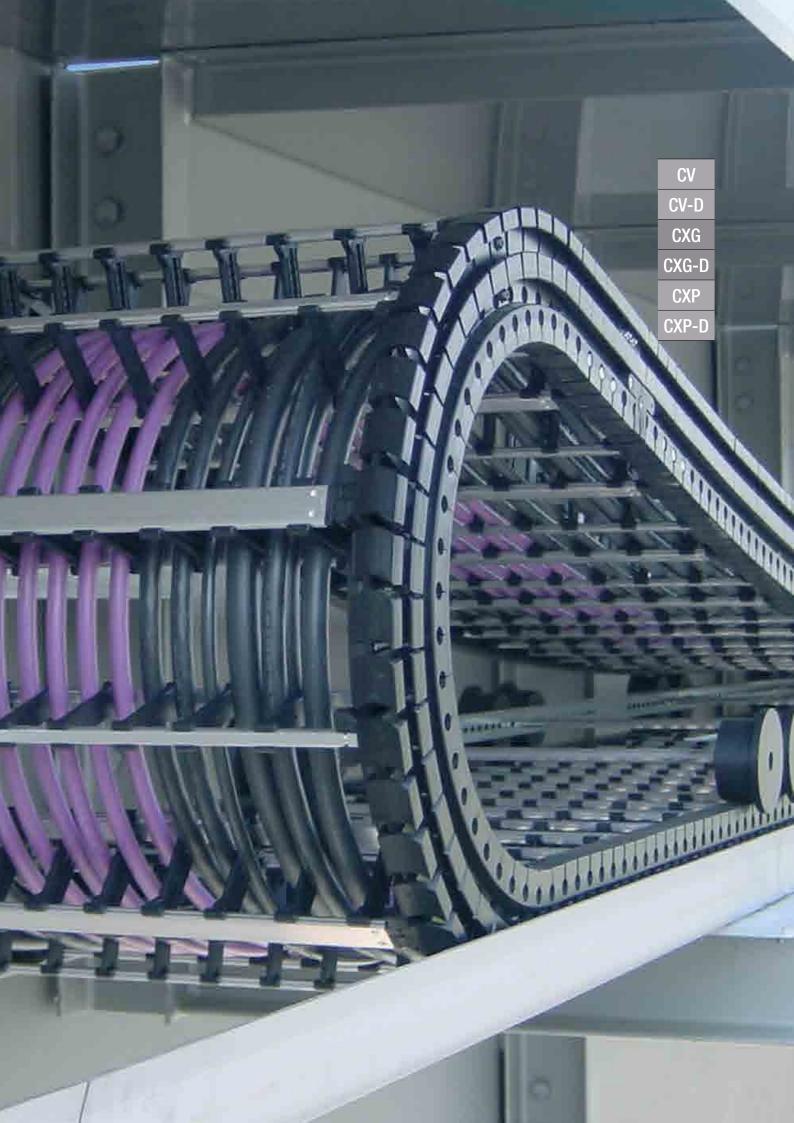

Conductix-Wampfler Cables

for Energy Guiding Chains

Special features of cables for Energy Guiding Chains

- Low weight and small diameters as a result of particularly thin conductor insulation and sheaths
- Best insulation materials for small wall thickness
- Very high resilience due to short lay pitches (7 to 8 x Ø)
- Fexible sheath compound with high resistance to tearing and abrasion
- Resistance to corkscrews as a result of a stranding with reverse twist
- Extruded filler in interstices provides stable construction
- High wear resistance against chain material

Apex of outer radius · High horizontal & vertical acceleration Unsupported upper chain links · Reverse deflection of the cable Deflection forces applied to the cable · Cables resting on inner frame stays Movement of the chain radius · Relative displacement and friction of the cable compared with the chain Beginning of the chain radius • Low shearing and tensile load on the cable • High horizontal & vertical acceleration · Additional cable acceleration when deflected • Deflection forces on the cable • Cable supported by outer frame stays of the chain's cross section Sliding chain section • High movement between cable and chain

Prominent places of particular impacts

generates compressive and tensile forces



Conductix-Wampfler Cables

for Reeling Systems


Special features of cables for Reeling Systems

- Reduced diameter and weight as a result of ideal insulation and sheathing materials
- Better resistance to corkscrew due to reverse twist stranding
- Stable construction and geometry based on extruded fillers
- Outer sheath is highly resistant to wear even in aggressive environments
- Extremely high resilience thanks to a very short lay stranding
- High axial rigidity due to interlinked inner and outer sheaths
- All high voltage cables are produced with left-hand lay

Specialities (available on request)

- Composite cables with power + control + fibre optics
- Cables with compounds for low temperature environments down to -50°C
- Cables with compounds and protection for very high temperatures up to 180°C
- Cables suitable for use in all kinds of water (e.g. drinking water, waste water etc.).

Prominent places of particular impacts




Monospiral winding reel

- High tensile loads can occur during winding
- · Torsional stresses through the use of guiding pulleys
- High speed in combination with changing bending direction.
- Reverse bending "S-type" due to mid feeding point
- Abrasion through the inner spokes of the drum body
- Temperature drops effect the cable jacket rigidity



Spreader winding reel

- · Very high tensile load from vertical pull
- The metal cleaves on the drum body may lead to abrasion
- Cable must withstand oil and grease
- Temperature drops effect the cable jacket rigidity



Random winding reel

- Random winding on the drum
- Smaller bending radii stress the copper conductors which need to be flexible

Level winding reel

- Torsion to the cable through the use of a special guiding device
- Bending via the special guiding device
- Winding of one layer has to be exact over the large width of the reel body
- Extreme ambient influences on the jacket (e.g. UV, ozone, coal dust, graphite)
- Max 2 layers on drum body because of heat emanation



11



Customized Service

Expertise

The breadth and depth of Conductix-Wampfler's service is geared to the requirements and desires of our customers. The service varies from consulting and project planning to long-term service contracts for complete systems for energy and data transfer.

Project planning

- Selection of suitable cables considering the installation and environmental requirements
- Calculation of our cables' ampacity for the respective application on request
- Complete selection of cables compatible with the specific system for energy and data transfer: correct cable lengths, physical dimensions, bending radii and tensile loads





Pre-assembly


- Assembly of cable packages onto cable-trolley systems; shipment on C-rails or I-beams for easier and faster final assembly
- Assembly of cables onto spring and motorized cable reels; shipment of complete assembly with cables connected to the slip rings
- Complete assembly of cable chain with cables; strain-reliefs optionally pre-assembled, shipments on special plug&play transport and assembly racks or wooden transport drums

Final assembly

- Complete installation as well as startup operation carried out by trained and qualified personnel
- Acceptance together with the customer
- On site instruction and training

Inspection & Servicing

 Regular inspections of the facility coupled with expert service, increase the availability and reliability of every system

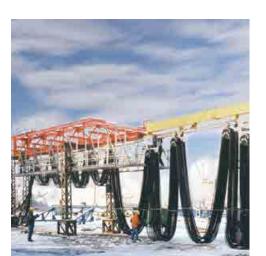

Questionnaire | Specification Data **Cables**



Technical datas									
On which energy transmission system is the cable used? Festoon System Reel Energy Guiding Chain									
		Cable 1	Cable 2	Cable 3	Cable 4	Cable 5			
Cable Designation	1								
Number of cores									
Cross section [mn	n²]								
Length [m/ piece]									
Piece	т								
Cable type	flat								
	round								
Sheath Material	rubber								
	PVC								
	PUR								
	others								
Earth conductor	yes								
	no								
Screen	yes								
	no								
Acceleration:Max. perm. operAmbient tempera	ating temp	erature of the conductor	[m/s²] : [°C]	 Inrush current / max. power: / [kVA] / 100% DC Rated voltage: U₀ / U: / [kV] Bending radius: [mm] Tensile load: [N] 					
static: from		[°C] to [°C] to ncerning the installation	[°C]	■ Installation:					
Data transfer I S	creen l F0								
	CAN-Bus	□ Industrial - Ethernet □ Overall screen □ P □ 50/125μ □ 62,5/	airs 🗆 Individual	What data has to be transferred?: [MBit/s] Required data transfer rate: [MBit/s] Number of fibers: □ 6 □ 12 □ 18 □ 24					
Operating Condi	tions								
-	s 🗆 Outcon: 🗆 a: 🗆 Ty	loors	□ Strong	Special chemical influences, e.g. Phosphates □ Sulphur □ Urea Other influences, e.g. □ Heavy pollution Type of pollution: □ □ Nythese □ □ Duth					
 Ambient Temperature: min [°C] max [°C] if yes, which type? □ Corrosive □ Not corrosive Humidity: [%] □ Very hot: °C □ Very cold: °C Perm. wind speed during crane operation: [m/s] 									

Your Applications – our Solutions

Cables from Conductix-Wampfler represent only one of the many solutions made possible by the broad spectrum of Conductix-Wampfler components for the transport of energy, data and fluid media. The solutions we deliver for your applications are based on your specific requirements. In many cases, a combination of several different Conductix-Wampfler systems can prove advantageous. You can count on all of Conductix-Wampfler's Business Units for hands-on engineering support - coupled with the perfect solution to meet your energy management and control needs.



Cable Reels

Motorized reels and spring reels by Conductix-Wampfler hold their own wherever energy, data and media have to cover the most diverse distances within a short amount of time - in all directions, fast and safe.



Festoon Systems

It's hard to imagine Conductix-Wampfler cable trolleys not being used in virtually every industrial application. They're reliable and robust and available in an enormous variety of dimensions and designs.



Conductor Rails

Whether they're enclosed conductor rails or expandable single-pole systems, the proven conductor rails by Conductix-Wampfler reliably move people and material.



Non-insulated Conductor Rails

Extremely robust, non-insulated conductor rails with copper heads or stainless steel surfaces provide the ideal basis for rough applications, for example in steel mills or shipyards.



Energy Guiding Chains

The "Jack of all trades" when it comes to transferring energy, data, air and fluid hoses. With their wide range, these energy guiding chains are the ideal solution for many industrial applications.



Slip Ring Assemblies

Whenever things are really "moving in circles", the proven slip ring assemblies by Conductix-Wampfler ensure the flawless transfer of energy and data. Here, everything revolves around flexibility and reliability!




Inductive Power Transfer IPT®

The no-contact system for transferring energy and data. For all tasks that depend on high speeds and absolute resistance to wear.



Reels, Retractors and Balancers

Whether for hoses or cables, as classical reels or high-precision positioning aids for tools, our range of reels and spring balancers take the load off your shoulders.



Jib Booms

Complete with tool transporters, reels, or an entire media supply system - here, safety and flexibility are key to the completion of difficult tasks.



Conveyor Systems

Whether manual, semiautomatic or with Power & Free – flexibility is achieved with full customization concerning layout and location.

Conductix-Wampfler | 2014 | subject to technical modifications without prior notice

www.conductix.com

Conductix-Wampfler

has just one critical mission: To provide you with energy and data transmission systems that will keep your operations up and running 24/7/365.

To contact your nearest sales office, please refer to: www.conductix.com/contact-search

