

# COUNTER-DRONE ANTENNAS




ALARIS  
ANTENNAS

GAIN THE ADVANTAGE

# COUNTER-DRONE ANTENNAS

Alaris Antennas has a large number of antennas which can be used for counter-drone solutions. The products include linear and circular polarised antennas with various options for sensing, jamming and direction-finding applications. The products are designed for use in mobile, base station, and man-portable applications.

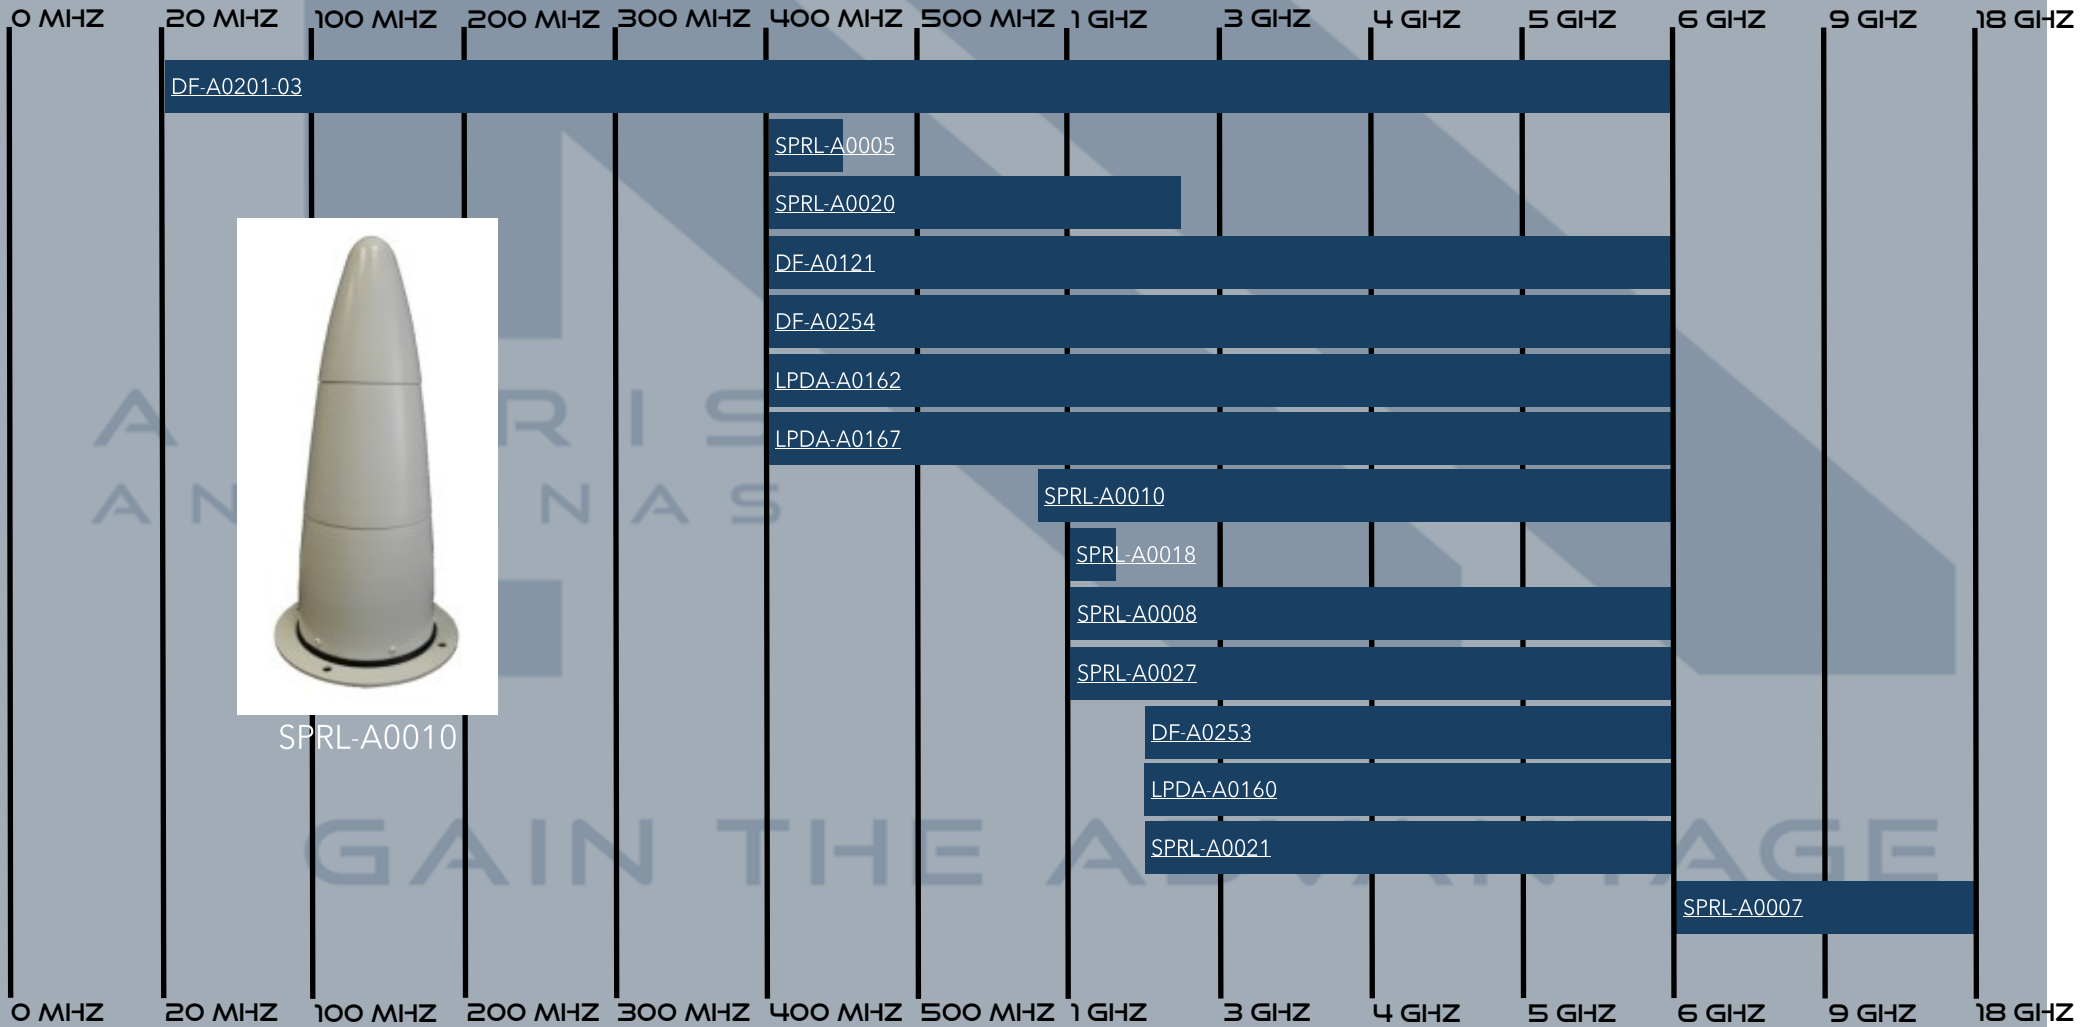

Antenna	Product Description	Frequency	Gain	Polarisation	L (mm)	D (mm)	H (mm)	W (mm)	Mass	Connector	Power
<a href="#">DF-A0201-03</a>	Manpack/Mobile Watson Watt DF Antenna	20 - 6000 MHz	-	Vertical	-	135 mm	777 mm	-	< 1.75 kg	TNC (f)	< 1 W
<a href="#">SPRL-A0005</a>	High Power Circular Polarised Antenna	400 - 450 MHz	> 6 dBi	-	900 mm	510 mm	-	-	< 18 kg	7/16 (f)	700 W
<a href="#">SPRL-A0020</a>	High-Power Circular Polarised Antenna	400 - 2500 MHz	> 6 dBic	LHCP	900 mm	510 mm	-	-	< 12 kg	N-Type (f)	200 W
<a href="#">DF-A0121</a>	Compact Dual Band Direction Finding Antenna	400 - 6000 MHz	-	Vertical	-	304 mm	720 mm	-	< 12 kg	TNC (f)	-
<a href="#">DF-A0254</a>	Compact Adcock DF Antenna	400 - 6000 MHz	-	Vertical	-	83 mm	385 mm	-	< 2 kg	MIL-DTL-38999	-
<a href="#">LPDA-A0162</a>	Dual Port High-Power LPDA Antenna	400 - 6000 MHz	See Data Sheet	Linear	625 mm	-	710 mm	160 mm	< 5 kg	N-Type (f)	100 W CW
<a href="#">LPDA-A0167</a>	Tri Port High-Power LPDA Antenna	400 - 6000 MHz	See Data Sheet	Linear	600 mm	-	880 mm	160 mm	< 6 kg	N-Type (f)	100 W CW
<a href="#">SPRL-A0010</a>	Dual Port Circular Polarised Antenna	900 - 6000 MHz	> 6 dBic	RHCP/LHCP	-	220 mm	450 mm	-	< 2 kg	N-Type (f)	100 W
<a href="#">SPRL-A0018</a>	High Power Circular Polarised Antenna	1000 - 1600 MHz	12 dBi	RHCP	1000 mm	160 mm	-	-	< 3 kg	N-Type (f)	50 W
<a href="#">SPRL-A0008</a>	High Power Circular Polarised Antenna	1000 - 6000 MHz	> 6 dBi	LHCP	320 mm	150 mm	-	-	< 4 kg	N-Type (f)	50 W
<a href="#">SPRL-A0027</a>	Cavity Backed Spiral Antenna	1000 - 6000 MHz	3 to 5 dBi	LHCP & RHCP	72 mm	163 mm	-	-	500 g	SMA (f)	10 W CW
<a href="#">DF-A0253</a>	Compact Adcock DF Antenna	2000 - 6000 MHz	-	Vertical	-	83 mm	388 mm	-	< 2 kg	SMA (f)	< 1 W
<a href="#">LPDA-A0160</a>	High-Power LPDA Antenna	2000 - 6000 MHz	> 9 dBi	Linear	105 mm	-	-	341 mm	TBD	N-Type (f)	See Data Sheet
<a href="#">SPRL-A0021</a>	High Power Circular Polarised Antenna	2000 - 6000 MHz	10 dBic	RHCP	< 550 mm	100 mm	-	-	< 2 kg	N-Type (f)	100 W
<a href="#">SPRL-A0007</a>	LHCP Cavity Backed Spiral Antenna	6000 - 18000 MHz	3 to 7 dBi	LHCP	67 mm	120 mm	-	-	500 g	SMA (f)	-